

# COM Express<sup>®</sup> Compact Module

## Ultra Low Power

### conga-CA945

Allows cost effective and power efficient COM Express<sup>™</sup> solutions

Combines Intel<sup>®</sup> Atom<sup>™</sup> processor technology with the feature rich embedded chipset Intel<sup>®</sup> 945 GSE.




<b>Formfactor</b>	<b>COM Express<sup>™</sup> Compact, (95 x 95 mm), Type II Connector Layout</b>
<b>CPU</b>	Intel <sup>®</sup> Atom <sup>™</sup> N270, 1.6 GHz, 512 kB cache, 533 MHz FSB, 45nm, 2.5W TDP
<b>DRAM</b>	1 Socket, SO-DIMM DDR2 533, up to 2 GByte
<b>Chipset</b>	Graphics & Memory Controller Hub: Intel <sup>®</sup> 945GSE I/O Controller Hub: Intel <sup>®</sup> 82801GBM (ICH7M)
<b>Ethernet</b>	Gigabit Ethernet, Realtek RTL8111
<b>I/O Interfaces</b>	3x PCI Express <sup>™</sup> Lanes, 2x Serial ATA <sup>*</sup> (AHCI), 1x EIDE (UDMA-66/100), 2x Express Card <sup>*</sup> (uses 2x USB & 2x PCI Express), 8x USB 2.0 (EHCI), PCI Bus 33 MHz Rev. 2.3, LPC Bus, I <sup>2</sup> C (Fast Mode, 400 kHz, Multi Master)
<b>Sound</b>	AC'97 Rev.2.2 Compatible, Digital High Definition Audio Interface with support for multiple audio codecs
<b>Graphics</b>	Enhanced 256 Bit 3D Video Controller, Intel <sup>®</sup> Graphics Media Accelerator 950, up to 10.6 GB/sec memory bandwidth, 256-bit graphics core, max. 224 MByte 64 Bit Video RAM (DVTM 3.0), Dynamic Display Modes for flat-panel, wide-screen and Digital TV support Two independent pipelines for full dual view support
<b>Motion Video Support</b>	High Definition Hardware Motion Compensation to support high definition hi-bitrate MPEG2 media playback, Up and Down Scaling of Video Content, High Definition Content Decode, HDTV (1080i/p) Support
<b>Flat panel Interface</b>	Dual 112 MHz LVDS Transmitter, Supports all 1x18, 2x18, Resolutions 640x480 up to 1920x1200, Automatic Panel Detection via EPI, (Embedded Panel Interface, based on VESA EDID <sup>™</sup> 1.3)
<b>CRT Interface</b>	400 MHz RAMDAC, Resolutions up to 2048x1536 @ 75 Hz, including 1920x1080 @ >85 Hz (HDTV)
<b>AUX Output</b>	1x SDVO
<b>congatec Board Controller</b>	Multi Stage Watchdog, Non-volatile User Data Storage, Manufacturing and Board information, Board Statistics, BIOS Setup Data Backup, I <sup>2</sup> C (Fast Mode, 400 kHz, Multi Master), Power Loss Control
<b>Embedded BIOS Features</b>	OEM Logo, OEM CMOS Defaults, LCD Control, (Auto Detection, Backlight Control), Flash Update, Based on AMIBIOS <sup>*</sup>
<b>Security</b>	The conga-CA945 can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e commerce will benefit also with improved authentication, integrity and confidence levels.
<b>Power Management</b>	ACPI 2.0 with Battery support
<b>Operating Systems</b>	Microsoft <sup>®</sup> Windows 7, Microsoft <sup>®</sup> Windows XP, Microsoft <sup>®</sup> Windows CE 6.0, Microsoft <sup>®</sup> Windows <sup>®</sup> Embedded Compact 7, Microsoft <sup>®</sup> Windows <sup>®</sup> embedded Standard, Linux
<b>Power Consumption</b>	Typ. application: <10 W @ 12V, see manual for full details, CMOS Battery Backup
<b>Temperature</b>	Operating: 0 .. +60°C Storage: -20 .. +80°C
<b>Humidity</b>	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.
<b>Size</b>	95 x 95 mm (3.74" x 3.74")

© 2014 congatec AG. All rights reserved. All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. The products may include software. Use of the software is subject to the terms and conditions set out in the respective owner's license agreements, which are available at [www.congatec.com](http://www.congatec.com) and/or upon request. Product names, logos, brands, and other trademarks featured or referred to within this datasheet, or the congatec website, are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG, our products, or our website. Rev. July 28, 2014 BLU

# Block Diagram conga-CA945

# Order Information conga-CA945

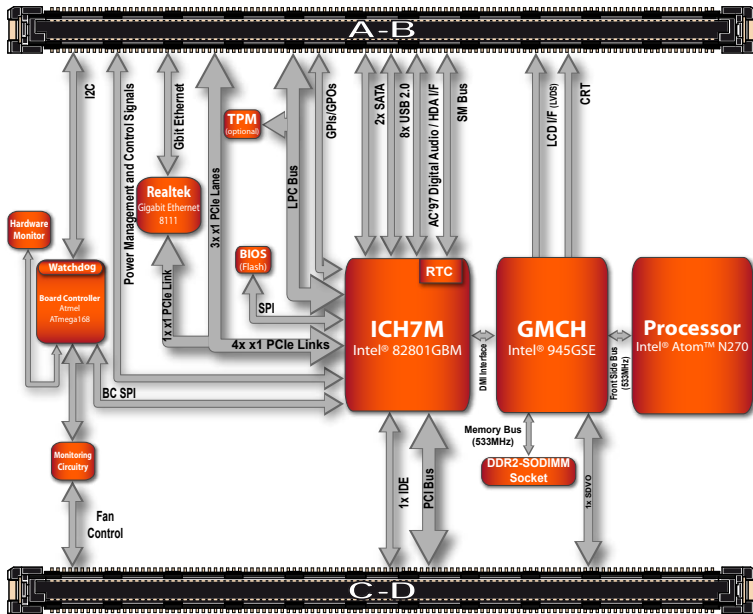

Article	PN	Description
conga-CA945/N270	062626	Intel Atom N270, CPU with 1.6GHz, 512kB L2-Cache and 533MHz FSB
conga-CA945/HSP-B	021441	Heatspreader, Standoff with 2.7mm bore hole
conga-CA945/HSP-T	022581	Heatspreader, Standoff with M2.5mm thread
conga-CA945/CSP-B	022590	Standard passive cooling solution, black surface with 10mm fins, bore hole standoffs
conga-CA945/CSP-T	022585	Standard passive cooling solution, black surface with 10mm fins, thread standoffs
DDR2-SODIMM-667 (512MB)	057841	DDR2 SODIMM memory module with 667MT/s and 512MB RAM.
DDR2-SODIMM-667 (1GB)	087412	DDR2 SODIMM memory module with 667MT/s and 1GB RAM
DDR2-SODIMM-667 (2GB)	068712	DDR2 SODIMM memory module with 667MT/s and 2GB RAM

## Engineering Tools / Accessories for COM Express\*

conga-CEVAL	065749	Evaluation carrier board for COM-Express-modules
conga-Cdebug	047854	COM-Express debugging platform. Including cable for COM, PS/2 and VGA.
conga-CKIT	064714	COM-Express-Starterkit, incl. conga-CEVAL, conga-CDEBUG, conga-FPA1 (PN: 024241), Dual DVI-D ADD2 card, Power supply, USB-Stick, ... Without COM Express-module
conga-MCB/COM Express	020715	Mini Carrier Board for COM Express with smart battery manager interface for mobile applications.
conga-MCB/COM Express Cable Kit	14000040	Complete cable kit for the COM Express mini carrier board
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-HDMI/Display Port adapter	500014	The conga-HDMI/DisplayPort adapter is used to convert the chipset graphic ports Port-B, Port-C and Port-D to the HDMI or DisplayPort Interface
DVI-D ADD2 Card	058500	ADD2 display adapter card with single DVI-D digital output. Suitable for all Intel based platforms that support Serial Digital Display Outputs (SDVO) on the standard, x16 PCI Express Graphics (PEG) port.
Dual DVI-D ADD2 Card	013226	ADD2 display adapter card with dual independent DVI-D output. Suitable for all Intel based platforms that support Serial Digital Display Outputs (SDVO) on the standard, x16 PCI Express Graphics (PEG) port.
conga-FPA2	047250	Flatpanel prototype adapter to develop your own flatpanel adapter including cables set.
COM-Express-carrierboard-Socket-5	400007	Connector for COM-Express carrier boards, height 5mm, packing unit 4 pieces
COM-Express-carrierboard-Socket-8	400004	Connector for COM-Express carrier boards, height 8mm, packing unit 4 pieces