

# COM Express Basic Module

## Economy Class

### conga-B915

Economy priced COM Express™ modules

Performance up to 1.5 GHz  
Intel® Celeron® M


ACPI Battery Support,  
Flat Panel detection ...



<b>Formfactor</b>	<b>COM Express™ Basic, (95 x 125 mm), Type II Connector Layout</b>
<b>CPU</b>	Intel® Celeron® M 370 1.5 GHz, 1 MB cache, FSB 400 MHz Intel® Celeron® M 373 1.0 GHz, ULV, 512 KB cache, FSB 400 MHz Intel® Celeron® M 600 MHz, ULV, 512 KB cache, FSB 400 MHz
<b>DRAM</b>	SO-DIMM DDR2 DDR400/PC4200 up to 2 GByte
<b>Chipset</b>	Graphics & Memory Controller Hub: Intel® 910GML E I/O Controller Hub: Intel® 82801FBM (ICH6-M)
<b>Ethernet</b>	Gigabit Ethernet, Realtek RTL8111
<b>I/O Interfaces</b>	3x PCI Express™ Lanes, PCI Express Graphic (PEG x16), 2x Serial ATA* (AHCI), 1x EIDE (UDMA-66/100), 2x Express Card* (uses 2x USB & 2x PCI Express), 8x USB 2.0 (EHCI), PCI Bus 33 MHz Rev. 2.3, LPC Bus, I²C (Fast Mode, 400 kHz, Multi Master)
<b>Sound</b>	AC'97 Rev.2.2 Compatible, Digital High Definition Audio Interface with support for multiple audio codecs
<b>Graphics</b>	Enhanced 256 Bit 3D Video Controller, Intel® Graphics Media Accelerator 900, 533 MHz Memory Clock, max. 128 MByte 64 Bit Video RAM (DVM T 3.0) Two independent pipelines for full dual view support
<b>Motion Video Support</b>	Motion Compensation, Subpicture Support, Dynamic Bob & Weave, HDTV (1920x1080) Support
<b>Flat panel Interface</b>	Dual 112 MHz LVDS Transmitter, Supports all 1x18, 2x18, 1x24, 2x24 Bit, VESA- and openLDI-Mappings, Resolutions 640x480 up to 1920x1200, Automatic Panel Detection via EPI, (Embedded Panel Interface, based on VESA EDID™ 1.3)
<b>CRT Interface</b>	400 MHz RAMDAC, Resolutions up to 2048x1536 @ 75 Hz, (QXGA), including 1920x1080 @ >85 Hz (HDTV)
<b>AUX Output</b>	2x SDVO
<b>congatec Board Controller</b>	Multi Stage Watchdog, Non-volatile User Data Storage, Manufacturing and Board information, Board Statistics, BIOS Setup Data Backup, I²C (Fast Mode, 400 kHz, Multi Master), Power Loss Control
<b>Embedded BIOS Features</b>	OEM Logo, OEM CMOS Defaults, LCD Control, (Auto Detection, Backlight Control), Flash Update, Based on AMIBIOS®
<b>Security</b>	The conga-B915 can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and commerce will benefit also with improved authentication, integrity and confidence levels.
<b>Power Management</b>	ACPI 2.0 with Battery support
<b>Operating Systems</b>	Microsoft® Windows XP, Microsoft® Windows® embedded Standard, Microsoft® Windows CE 6.0, Microsoft® Windows Embedded Compact 7, Linux
<b>Power Consumption</b>	Typ. application: 6.5 W @ 12V, (Intel® Celeron® M 1 GHz), see manual for full details, CMOS Battery Backup
<b>Temperature</b>	Operating: 0 .. +60°C Storage: -20 .. +80°C
<b>Humidity</b>	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.
<b>Size</b>	95 x 125 mm (3.74" x 4.92")

# Block Diagram conga-B915

# Order Information conga-B915

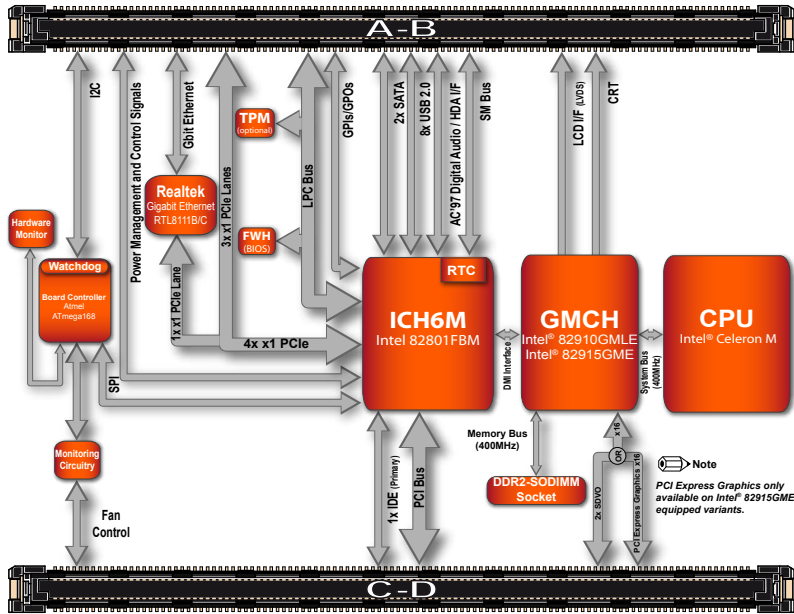

Article	PN	Description
conga-B915/CM600-512 eco	057741	Intel 910GMLE chipset and Intel Celeron M with 600MHz, 512 kB L2-Cache and 400 Mhz FSB
conga-B915/373 eco	077587	COM Express module with Intel 910GMLE chipset and Intel Celeron M 373, ULV-CPU with 1.0 GHz, 512kB L2-Cache and 400 Mhz FSB
conga-B915/370 eco	025540	COM Express module with Intel 910GMLE chipset and Intel Celeron M with 1.5GHz, 1 MByte L2-Cache and 400 Mhz FSB
conga-B915/HSP-B	024175	Heatspreader, Standoff with 2.7mm bore hole
conga-B915/HSP-T	058741	Heatspreader, Standoff with M2.5mm thread
conga-B915/CSA-B	054123	Standard active cooling solution, surface black with 10mm fins, integrated 12V fan 5500rpm, cable length 200mm, w/3 pin, 2.54 pitch connector, bore hole standoffs
conga-B915/CSA-T	069877	Standard active cooling solution, surface black with 10mm fins, integrated 12V fan 5500rpm, cable length 200mm, w/3 pin, 2.54 pitch connector, thread standoffs
conga-B915/CSP-B	087415	Standard passive cooling solution, surface black with 10mm fins, bore hole standoffs
conga-B915/CSP-T	068741	Standard passive cooling solution, surface black with 10mm fins, thread standoffs
conga-B915/Thermal Stack	048791	Thermal stack set for conga-B915. Consists of 3 stacks for CPU, GMCH and IOCH
DDR2-SODIMM-667 (0512MB)	057841	512 MByte DDR2 SODIMM memory module
DDR2-SODIMM-667 (1024MB)	087412	1 GByte DDR2 SODIMM memory module
DDR2-SODIMM-667 (2048MB)	068712	2 GByte DDR2 SODIMM memory module

Engineering Tools / Accessories for COM Express*		
conga-CEVAL	065749	Evaluation carrier board for COM-Express-modules
conga-Cdebug	047854	COM-Express debugging platform. Including cable for COM, PS/2 and VGA.
conga-CKIT	064714	COM-Express-Starterkit, incl. conga-CEVAL, conga-CDEBUG, conga-FPA1 (PN: 024241), Dual DVI-D ADD2 card, Power supply, USB-Stick, ... Without COM Express-module
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-HDMI/Display Port adapter	500014	The conga-HDMI/DisplayPort adapter is used to convert the chipset graphic ports Port-B, Port-C and Port-D to the HDMI or DisplayPort Interface
DVI-D ADD2 Card	058500	ADD2 display adapter card with single DVI-D digital output. Suitable for all Intel based platforms that support Serial Digital Display Outputs (SDVO) on the standard, x16 PCI Express Graphics (PEG) port.
Dual DVI-D ADD2 Card	013226	ADD2 display adapter card with dual independent DVI-D output. Suitable for all Intel based platforms that support Serial Digital Display Outputs (SDVO) on the standard, x16 PCI Express Graphics (PEG) port.
conga-FPA2	047250	Flatpanel prototype adapter to develop your own flatpanel adapter Including cables set.
COM-Express-carrierboard-socket-5	400007	Connector for COM-Express carrier boards, height 5mm, packing unit 4 pieces
COM-Express-carrierboard-socket-8	400004	Connector for COM-Express carrier boards, height 8mm, packing unit 4 pieces

© 2013 congatec AG. All rights reserved. All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. The products may include software. Use of the software is subject to the terms and conditions set out in the respective owner's license agreements, which are available at [www.congatec.com](http://www.congatec.com) and/or upon request. Product names, logos, brands, and other trademarks featured or referred to within this datasheet, or the congatec website, are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG, our products, or our website.  
Rev. September 24, 2013 MD