


conga-HPC/uATX-Client

COM-HPC® Client Type Size A, B, C Application Carrier Board

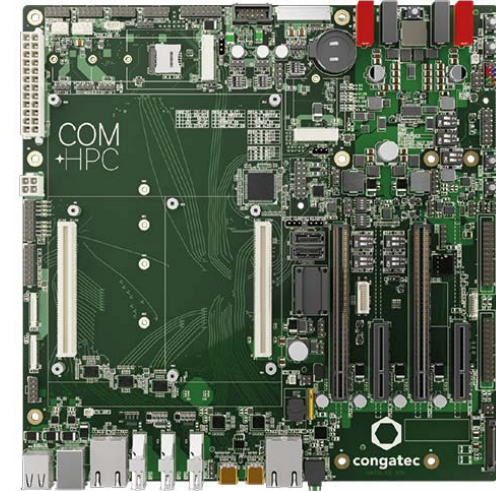

User's Guide

Revision 1.01

Revision History

Revision	Date (yyyy-mm-dd)	Author	Changes
0.1	2023-01-19	BEU	• Preliminary release
0.2	2023-08-01	BEU	• Updated title page • Updated entire section 2 "Connector Layout" • Improved alignment of connector images throughout the document • Changed M.2 Key B (X10) to M.2 Key E (X67) socket throughout the document • Deleted DIP SW3 and DIP SW4.2 (M2B_1_RESET#) setting from section 4.3.5 "M.2 Key E (X67)" • Deleted DIP SW19 and changed functionality to DIP SW11.2 in section 4.8.2 "I²S/SoundWire" • Updated number of ground test points in section 5.2 "Ground Test Points"
0.3	2025-01-31	BEU	• Updated preface section • Updated RoHS Directive • Added WEEE Compliance Declaration • Updated section 1.1 "COM-HPC Client Concept" • Updated sections 3.1 "Feature List" and 3.3 "Environmental Specifications" • Added a note to section 3.2 "Mechanical Dimensions" • Updated section 3.3 "Environmental Specifications" • Added note to section 4.5.1 "USB4 Type-C Ports" • Renamed section 6 to "Mechanical Drawing"
1.00	2025-04-16	BEU	• Final release
1.01	2025-04-28	BEU	• Improved description of DIP SW18 in section 4.3.1 "PCIe Clock Request Signal Settings" • Improved description of SW1.2 in Table 19 "SW1 - M.2 Key B (X7) Settings" • Added description for D102 to section 4.3.5 "M.2 Key E (X67)" • Added resistor description to Pin 4 +1.8V standby in Table 63 "X54 - I2C1 Pin Header Pinout" • Added resistor description to Pin 2 +5V in Table 65 "X50 - Front Panel Pin Header Pinout" • Added note for resistor description of I2C signals in section 4.22 "I2C I/O Expander Pin Header"

Preface

This user's guide provides information about the components, features, and connectors available on the conga-HPC/uATX-Client evaluation carrier board. Additionally, check the restricted area of the congatec website at www.congatec.com and the website of the respective silicon vendor for relevant documents (e.g., Erratum, PCN, Sighting Reports, etc.).

Software Licenses

Notice Regarding Open Source Software

The congatec products contain Open Source software that has been released by programmers under specific licensing requirements such as the "General Public License" (GPL) Version 2 or 3, the "Lesser General Public License" (LGPL), the "ApacheLicense" or similar licenses.

You can find the specific details at <https://www.congatec.com/en/licenses/>. Search for the revision of the BIOS/UEFI or Board Controller Software (as shown in the POST screen or BIOS setup) to get the complete product related license information. To the extent that any accompanying material such as instruction manuals, handbooks etc. contain copyright notices, conditions of use or licensing requirements that contradict any applicable Open Source license, these conditions are inapplicable.

The use and distribution of any Open Source software contained in the product is exclusively governed by the respective Open Source license. The Open Source software is provided by its programmers without ANY WARRANTY, whether implied or expressed, of any fitness for a particular purpose, and the programmers DECLINE ALL LIABILITY for damages, direct or indirect, that result from the use of this software.

OEM/ CGUTL BIOS

BIOS/UEFI modified by customer via the congatec System Utility (CGUTL) is subject to the same license as the BIOS/UEFI it is based on. You can find the specific details at <https://www.congatec.com/en/licenses/>.

Disclaimer

The information contained within this user's guide, including but not limited to any product specification, is subject to change without notice.

congatec GmbH provides no warranty with regard to this user's guide or any other information contained herein and hereby expressly disclaims any implied warranties of merchantability or fitness for any particular purpose with regard to any of the foregoing. congatec GmbH assumes no liability for any damages incurred directly or indirectly from any technical or typographical errors or omissions contained herein or for discrepancies between the product and the user's guide. In no event shall congatec GmbH be liable for any incidental, consequential, special, or exemplary damages, whether based on tort, contract or otherwise, arising out of or in connection with this user's guide or any other information contained herein or the use thereof.

Intended Audience

This user's guide is intended for technically qualified personnel. It is not intended for general audiences.

RoHS Directive

All congatec GmbH designs comply with EU RoHS Directive 2011/65/EU and Delegated Directive 2015/863.

WEEE Directive



To comply with Directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE), ensure that this product is disposed of correctly at the end of its lifecycle. Customers are required to take electrical and electronic equipment to designated collection facilities separate from unsorted municipal waste, following applicable regional laws.

Proper disposal through designated collection points allows for the recycling, recovery, and reuse of valuable materials, supporting a more efficient use of resources and reducing environmental impact.



Note

Standalone congatec components, such as modules, carrier boards, and cooling solutions are designed to function only within other products. WEEE registration for the complete product must be completed by the entity placing the final product on the market.

Electrostatic Sensitive Device



All congatec GmbH products are electrostatic sensitive devices. They are enclosed in static shielding bags, and shipped enclosed in secondary packaging (protective packaging). The secondary packaging does not provide electrostatic protection.

Do not remove the device from the static shielding bag or handle it, except at an electrostatic-free workstation. Also, do not ship or store electronic devices near strong electrostatic, electromagnetic, magnetic, or radioactive fields unless the device is contained within its original packaging. Be aware that failure to comply with these guidelines will void the congatec GmbH Limited Warranty.

Copyright Notice

Copyright © 2023, congatec GmbH. All rights reserved. All text, pictures and graphics are protected by copyrights. No copying is permitted without written permission from congatec GmbH.

congatec GmbH has made every attempt to ensure that the information in this document is accurate yet the information contained within is supplied "as-is".

Trademarks

Product names, logos, brands, and other trademarks featured or referred to within this user's guide, or the congatec website, are the property of their respective trademark holders. These trademark holders are not affiliated with congatec GmbH, our products, or our website.

Certification

congatec GmbH is certified to DIN EN ISO 9001 standard.



Symbols

The following symbols are used in this user's guide:



Warning

Warnings indicate conditions that, if not observed, can cause personal injury.



Caution

Cautions warn the user about how to prevent damage to hardware or loss of data.



Note

Notes call attention to important information that should be observed.



Connector Type

Describes the connector that must be used with the congatec evaluation carrier board, not the connector found on the congatec evaluation carrier board.



Link to connector layout diagram

Warranty

congatec GmbH makes no representation, warranty or guaranty, express or implied regarding the products except its standard form of limited warranty ("Limited Warranty") per the terms and conditions of the congatec entity, which the product is delivered from. These terms and conditions can be downloaded from www.congatec.com. congatec GmbH may in its sole discretion modify its Limited Warranty at any time and from time to time.

The products may include software. Use of the software is subject to the terms and conditions set out in the respective owner's license agreements, which are available at www.congatec.com and/or upon request.

Beginning on the date of shipment to its direct customer and continuing for the published warranty period, congatec GmbH represents that the products are new and warrants that each product failing to function properly under normal use, due to a defect in materials or workmanship or due to non conformance to the agreed upon specifications, will be repaired or exchanged, at congatec's option and expense.

Customer will obtain a Return Material Authorization ("RMA") number from congatec GmbH prior to returning the non conforming product freight prepaid. congatec GmbH will pay for transporting the repaired or exchanged product to the customer.

Repaired, replaced or exchanged product will be warranted for the repair warranty period in effect as of the date the repaired, exchanged or replaced product is shipped by congatec, or the remainder of the original warranty, whichever is longer. This Limited Warranty extends to congatec's direct customer only and is not assignable or transferable.

Except as set forth in writing in the Limited Warranty, congatec makes no performance representations, warranties, or guarantees, either express or implied, oral or written, with respect to the products, including without limitation any implied warranty (a) of merchantability, (b) of fitness for a particular purpose, or (c) arising from course of performance, course of dealing, or usage of trade.

congatec GmbH shall in no event be liable to the end user for collateral or consequential damages of any kind. congatec shall not otherwise be liable for loss, damage or expense directly or indirectly arising from the use of the product or from any other cause. The sole and exclusive remedy against congatec, whether a claim sound in contract, warranty, tort or any other legal theory, shall be repair or replacement of the product only.

Technical Support

congatec GmbH technicians and engineers are committed to providing the best possible technical support for our customers so that our products can be easily used and implemented. We request that you first visit our website at www.congatec.com for the latest documentation, utilities and drivers, which have been made available to assist you. If you still require assistance after visiting our website then contact our technical support department by email at support@congatec.com

Terminology

Term	Description
PCIe	Peripheral Component Interface Express
SDIO	Secure Digital Input Output
USB	Universal Serial Bus
SATA	Serial AT Attachment
HDA	High Definition Audio
I ² C Bus	Inter-Integrated Circuit Bus
SM Bus	System Management Bus
GbE	Gigabit Ethernet
LVDS	Low Voltage Differential Signaling
HBR3	High Bit Rate 3
DDC	Display Data Channel
GPIO	General Purpose Input/Output
eDP	Embedded DisplayPort
LVDS	Low Voltage Differential Signaling
NC	Not connected
NA	Not available
TBD	To be determined

Contents

1	Introduction	11	4.5.2	USB 3.2 Gen 2x1 Type-A Ports	36
1.1	COM-HPC® Client Concept	11	4.5.3	USB 2.0 Type-A Ports	36
1.2	conga-HPC/uATX-Client	13	4.5.4	PMCALERT# Jumper	36
1.3	Order Number	13	4.6	SATA	37
2	Connector Layout	14	4.6.1	SATA Power	37
3	Specifications	15	4.7	Ethernet Ports	38
3.1	Feature List	15	4.8	Audio Interfaces	39
3.2	Mechanical Dimensions	16	4.8.1	Audio Jack (4-Pole)	39
3.3	Environmental Specifications	16	4.8.2	I ² S/SoundWire®	39
4	Connectors and Features	17	4.8.3	DMIC	40
4.1	Power Supply Connectors	23	4.9	I ² C Buses	41
4.1.1	ATX Power Connectors	23	4.10	SPI Flash Socket	41
4.1.2	DC Banana Jacks	25	4.11	Intel ISP Adaptor-C2 Connector	43
4.1.3	Power States LEDs	26	4.12	General Purpose SPI Port	44
4.1.4	VIN_PWR_OK Signal	26	4.13	eSPI	44
4.1.5	Power-Up Control	27	4.13.1	eSPI Header	46
4.1.6	Module Type Detection	27	4.13.2	Serial Ports	46
4.2	CMOS Battery Holder	28	4.13.2.1	COM Port 0 Header	47
4.3	PCIe Connectors	29	4.13.2.2	COM Port 1 Header	48
4.3.1	PCIe Clock Request Signal Settings	29	4.13.2.3	Module Serial Port 0	48
4.3.2	PCIe x16 Slots	30	4.13.2.4	Module Serial Port 1	49
4.3.3	PCIe x4 Slots	30	4.13.3	System Fan Header	50
4.3.4	M.2 Key B (X7) + micro-SIM Card Slot	30	4.14	CPU and Module Fan Header	51
4.3.5	M.2 Key E (X67)	32	4.15	Debug Header	52
4.3.6	M.2 Key M (X13)	32	4.16	Feature Connector	53
4.4	Display Interfaces	33	4.17	GPIO Pin Header	54
4.4.1	eDP	33	4.18	I2C0 Pin Header	55
4.4.1.1	eDP Panel and Backlight Power Supply	34	4.19	I2C1 Pin Header	55
4.4.1.2	Flat Panel and Backlight Voltage Selection	34	4.20	SMBus Pin Header	56
4.4.2	DP++	35	4.21	Front Panel Pin Header	56
4.5	Universal Serial Bus (USB)	35	4.22	I2C I/O Expander Pin Header	57
4.5.1	USB4 Type-C Ports	35	4.23	CSI Port 0	58
			4.24	CSI Port 1	59
			5	Additional Features	60
			5.1	Buttons	60

5.1.1	Power	60
5.1.2	Reset	60
5.1.3	Fast Standby Discharge	60
5.1.4	LID.....	61
5.1.5	Sleep.....	61
5.2	Ground Test Points.....	61
5.3	Debug LEDs.....	61
6	Mechanical Drawing	62

List of Tables

Table 1	COM-HPC® Interface Summary	11	Table 36	X48 - Intel ISP Adaptor-C2 Connector Pinout.....	43
Table 2	Order Description	13	Table 37	JP7 - Debug Reset Trigger Signal Settings.....	43
Table 3	Feature Summary	15	Table 38	CN2 - General Purpose SPI Port Pinout.....	44
Table 4	Connector P1 (X1) Pinout.....	17	Table 39	SW6 - Super I/O Settings.....	45
Table 5	Connector P2 (X4) Pinout.....	20	Table 40	SW7.1 - Super I/O Settings.....	45
Table 6	SW16.2 - ATX/AT PSU Settings.....	23	Table 41	SW7.2 - ESPI_CSI[0:1]# Settings	45
Table 7	JP12 - ATX 5V Standby Settings	24	Table 42	X39 - eSPI Header Pinout	46
Table 8	X63 - 24-Pin ATX Power Pinout.....	24	Table 43	X41 - COM 0 Pinout.....	47
Table 9	X64 - 4-Pin ATX12V Power Pinout	25	Table 44	SW8 - COM Port 0 Transceiver Settings	47
Table 10	X60, X61 - DC Banana Jacks Pinout	25	Table 45	SW9 - COM Port 0 Transceiver Settings	47
Table 11	SW16.1 - Buck-Boost Converter Settings	25	Table 46	X40 - COM 1 Header Pinout.....	48
Table 12	Power LEDs Status	26	Table 47	X37 - UART0 Pinout	48
Table 13	JP8 - VIN_PWR_OK Signal Settings.....	26	Table 48	SW5.1 - Disable UART0	49
Table 14	Module Type Detection Pinout Description.....	27	Table 49	JP4 - UART0 and UART1 Power Settings.....	49
Table 15	JP11 - TYPE0 Signal Settings.....	28	Table 50	X38 - UART1 Pinout	49
Table 16	JP10 - Battery Settings	28	Table 51	SW5.2 - Disable UART1	50
Table 17	JP1, JP15 - PCIe CLKREQ Signal Settings	29	Table 52	JP4 - UART0 and UART1 Power Settings.....	50
Table 18	SW18 - M.2 Key M (X13) CLKREQ Signal Settings	29	Table 53	X42 - SYS Fan Pinout	50
Table 19	SW1 - M.2 Key B (X7) Settings.....	31	Table 54	JP5 - Fan Voltage Settings.....	51
Table 20	SW2 - M.2 Key B (X7) Settings.....	31	Table 55	JP6 - Fan Speed Settings.....	51
Table 21	SW4 - M.2 Key E (X67) Settings.....	32	Table 56	X57 - CPU Fan Header Pinout	51
Table 22	X26 - eDP Pinout.....	33	Table 57	X56 - Module Fan Header Pinout	52
Table 23	X27 - eDP Power Pinout.....	34	Table 58	JP9 - CPU and Module Fan Voltage Control	52
Table 24	JP2 - Flat Panel Voltage Settings.....	34	Table 59	X51 - Debug Header Pinout	52
Table 25	JP3 - Backlight Voltage Settings.....	34	Table 60	X49 - Feature Connector Pinout	53
Table 26	X20 - PMCALERT# Settings	36	Table 61	X52 - GPIO Header Pinout.....	54
Table 27	X30 - SATA Power Pinout.....	37	Table 62	X53 - I2C0 Pin Header Pinout.....	55
Table 28	X32, X34 - Ethernet Status LEDs Description	38	Table 63	X54 - I2C1 Pin Header Pinout.....	55
Table 29	X31 - NBASET0_SDP Header Pinout	38	Table 64	X55 - SMBus Header Pinout	56
Table 30	X33 - NBASET1_SDP Header Pinout	38	Table 65	X50 - Front Panel Pin Header Pinout	56
Table 31	X44 - Audio Jack Pinout.....	39	Table 66	X47 - I2C Header Pinout.....	57
Table 32	SW11.2 - Audio Input Selection.....	39	Table 67	X35 - CSI Port 0 Pinout	58
Table 33	X45 - I²S/SoundWire Header Pinout.....	40	Table 68	X36 - CSI Port 1 Pinout	59
Table 34	X43 - DMIC Header Pinout	40			
Table 35	BIOS Select Options	42			



1 Introduction

1.1 COM-HPC® Client Concept

COM-HPC® is an open standard defined specifically for high performance Computer-on-Modules (COMs) for embedded systems. The defined module types are client module with fixed input voltage, client module with variable input voltage and server module with fixed input voltage.

The COM-HPC® modules are available in the following form factors:

- Mini 95 mm x 70 mm
- Size A 95 mm x 120 mm
- Size B 120 mm x 120 mm
- Size C 160 mm x 120 mm
- Size D 160 mm x 160 mm
- Size E 200 mm x 160 mm

Table 1 COM-HPC® Interface Summary

Features	Classification	Mini Module Min/Max	Client Module Min/Max	Server Module Min/Max	Comment
Ethernet	NBASE-T	1 / 2	1 / 2	1 / 1	
	KR/KX	N.A	0 / 2	2 / 8	
	SGMII	0 / 2	N.A	N.A	
Storage	SATA	0 / 2	0 / 2	0 / 2	Pin is shared with PCIe on mini module
PCIe	Lane 0-47	1 / 16	4 / 48	8 / 48	Two PCIe reference clock output pairs required on mini module
	Lane 48-63	N.A	N.A	0 / 16	
	BMC	N.A	0 / 1	1 / 1	
USB	USB 2.0 Ports 0-7	6 / 8	4 / 8	4 / 8	Ports 0-5 (mini module) or ports 0-3 (server/client module) are used for USB 3.2 and USB4 if implemented.
	USB 3.2 Gen 1 or Gen 2	0 / 5	0 / 4	0 / 4	Requires one SuperSpeed Tx pair and one Rx pair per port
	USB 3.2 Gen 2x2	0 / 4	0 / 4	0 / 2	Requires two SuperSpeed Tx pairs and two Rx pairs per port
	USB4	0 / 4	0 / 4	0 / 2	USB4 ports use USB 3.2 Gen 2x2 ports
SPI	eSPI	0 / 1	0 / 1	0 / 1	
	Boot SPI	1 / 1	1 / 1	1 / 1	
	General Purpose SPI	1 / 1	1 / 1	1 / 1	
BIOS Select	-	1 / 1	1 / 1	1 / 1	



Features	Classification	Mini Module Min/Max	Client Module Min/Max	Server Module Min/Max	Comment
Display	DDI	0 / 2	1 / 3	N.A	Additional display outputs may be available on the USB4 interface. On mini module, DDI pins are shared with USB4.
	eDP	0 / 1	0 / 1	N.A	
MIPI	DSI	0 / 1	0 / 1	N.A	¹ Optional FFC connectors for MIPI-CSI on the mini module.
	CSI	N.A ¹	0 / 2	N.A	
Audio	Soundwire	0 / 2	0 / 2	N.A	I2S pins may be used for one HDA port or two additional SoundWire ports for a total of up to four SoundWire ports.
	I2S	0 / 1	0 / 1	N.A	
Other Serial Ports	I2C	2 / 3	2 / 2	2 / 2	I2C0 and I2C1 for client and server modules. The mini module supports a third I2C port (I2C2/MDIO for SGMII PHY setup).
	SMBus	1 / 1	1 / 1	1 / 1	
	IPMB	N.A	0 / 1	0 / 1	
	UART	0 / 2	0 / 2	1 / 2	
GPIO	-		12 / 12	12 / 12	
Miscellaneous	Watchdog Timer	0 / 1	0 / 1	0 / 1	
	Fan (PWM and tachometer)	1 / 1	1 / 1	1 / 1	
FuSa	FuSa set of signals	0 / 1	0 / 1	0 / 1	
Power Rails	VCC	12 / 12	28 / 28	28 / 28	
	VCC_5V-SBY	N.A	0 / 2	0 / 2	The mini module does not have 5V standby pins.
	VCC_RTC	1 / 1	1 / 1	1 / 1	
	GND	All	All	All	All available GND pins shall be used.
Connector	J1	1 / 1	1 / 1	1 / 1	
	J2	N.A	0 / 1	1 / 1	



1.2 conga-HPC/uATX-Client

The conga-HPC/uATX-Client carrier board is designed for COM-HPC® Client Module Sizes A, B, and C.

The conga-HPC/uATX-Client provides most of the functional requirements for any embedded PC application. These functions include, but are not limited to a rich complement of contemporary high bandwidth serial interfaces such as PCI Express®, Serial ATA, USB4®, and Gigabit Ethernet. To ensure stable data throughput, the carrier board is equipped with high performance connectors in accordance with the COM-HPC® specification.

By combining the scalability of COM-HPC® Client Modules, the conga-HPC/uATX-Client carrier board provides manufacturers and developers with a platform to jump-start the development of systems and applications based on COM-HPC® specification. This helps to reduce product design cycle and encourages rapid innovation in system design, to meet the ever-changing needs of the market.

The various features and capabilities offered by the conga-HPC/uATX-Client carrier board makes it ideal for the integration of Client Module Sizes A, B, and C.

1.3 Order Number

Table 2 Order Description

Part Number	Product Name	Description
065620	conga-HPC/uATX-Client	COM-HPC® Client µATX carrier board suitable for congatec COM-HPC modules with Size A, B and C.




2 Connector Layout

The connector layout picture shows each connector and its designator.

Hover over any component. When the mouse icon changes, click on the link to go to the area in the document where the component is described.

Use the mouse icon in the top left hand corner of the destination page to return to the connector layout picture.

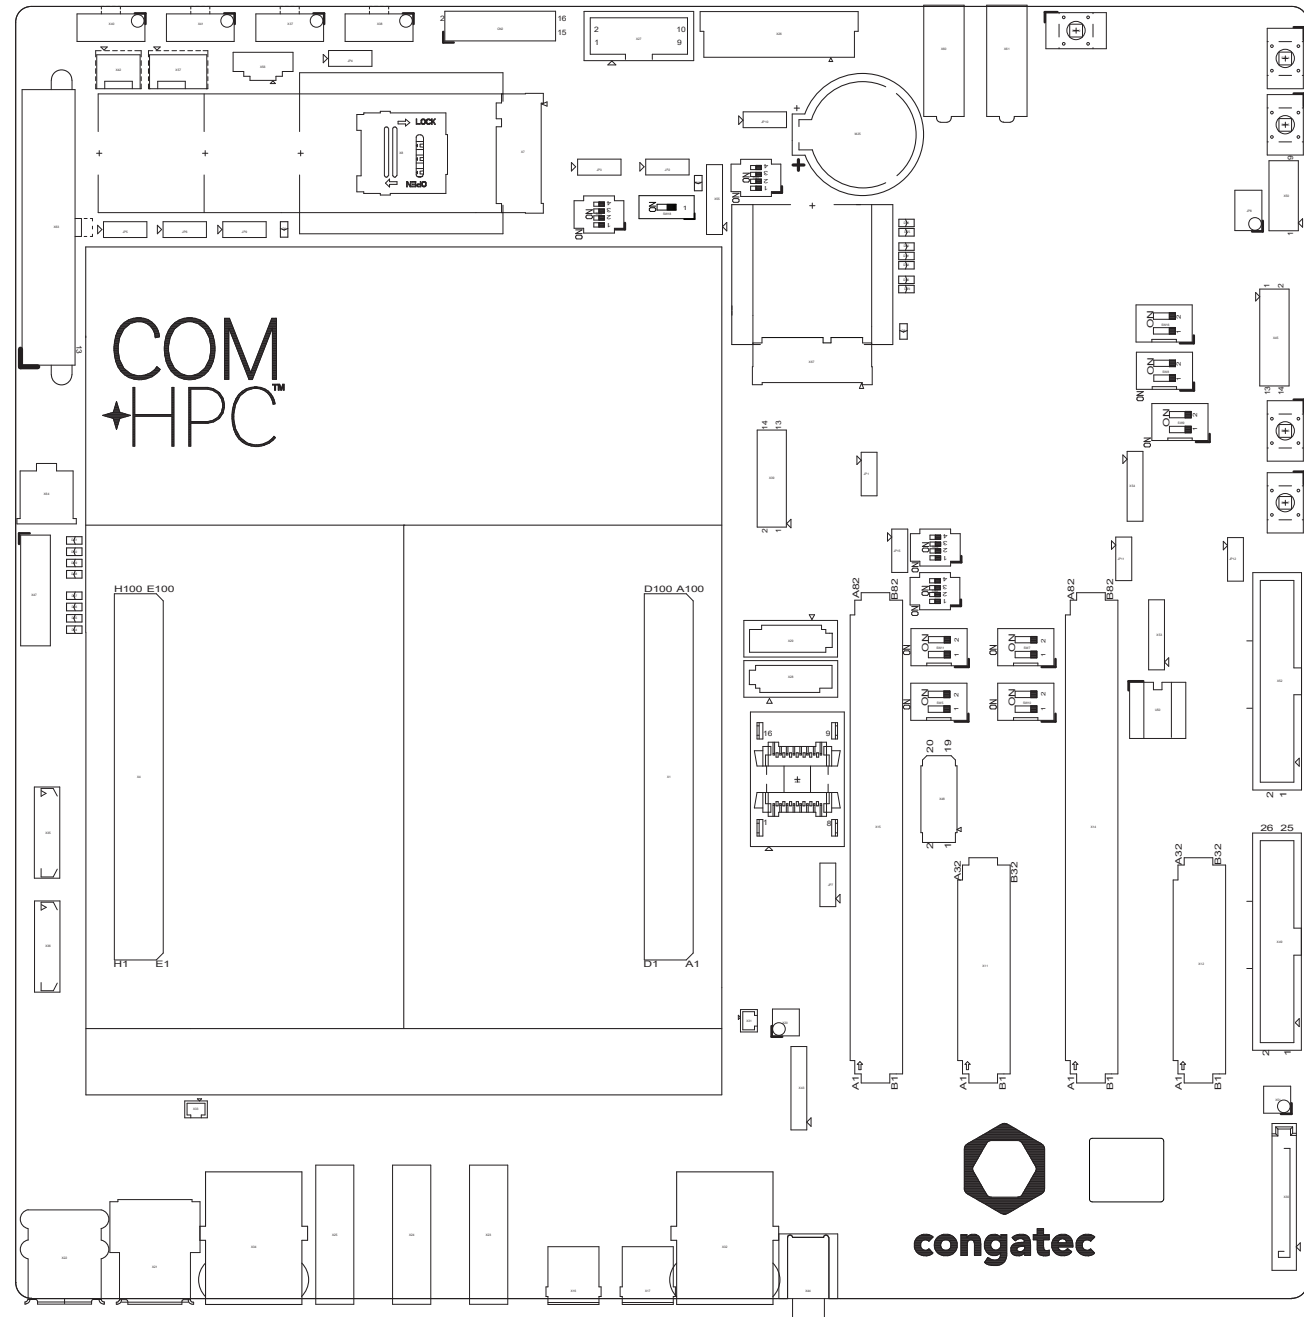



3 Specifications

3.1 Feature List

Table 3 Feature Summary

Form Factor	Standard Micro-ATX
Board Type	Application Carrier Board for COM-HPC Client Type Modules (Sizes A, B, C)
Internal IO	2x PCIe Gen4 x16 2x PCIe Gen4 x4 2x SATA III 1x 2.5" Disk Drive Power connector 1x M.2 Key B 2242/3042/2260/2280 (USB2, PCIe x2, SIM) 1x M.2 Key E 2230/3030 (USB2, PCIe x2) 1x M.2 Key M 2242/2260/2280/22110 (PCIe x4, bottom side) 1x eDP (optional for LVDS) 1x DMIC header 1x I2S/SoundWire header 2x MIPI CSI2/3 4-lane camera FFC 2x UART native by module 2x UART by Super IO 1x General Purpose SPI 2x I2C header 1x SMB header 12x GPIO by header 1x Feature header with system control signals 1x System Fan 1x CPU Fan 1x RTC CMOS battery holder 1x Power button 1x Reset button 1x Fast standby discharge button 1x LID button 1x Sleep button 1x SPI boot flash socket 1x Intel ISP header 1x ATX power connector 24-pin 1x AT banana power jacks 8-20V
External IO	1x Dual USB 2 1x Dual USB 3.2 up to 10Gbps 2x USB4 with Thunderbolt Retimer (1x with Power Delivery) 3x DP++ with 8.1 Gbps Re-driver 2x 2.5GbE RJ45 with IEEE1588 support 1x Audio Jack 4-pin on-carrier HDA codec
Power Management	ACPI 6.0
Operating Systems	Microsoft® Windows 11 Microsoft® Windows 10 Microsoft® Windows 10 IoT Enterprise Linux Yocto
Temperature Range	Commercial: Operating Temperature: 0 to +60°C Storage Temperature: -20 to +80°C
Relative Humidity	Operating: 10 to 85% r. H. non cond. Storage: 5 to 85% r. H. non cond.
Size	244 mm x 244 mm



Note

The module must also support the features for them to function. Refer to the module’s user’s guide for information about supported features.



3.2 Mechanical Dimensions

- 244 mm x 244 mm
- Maximum height approximately 19 mm top side and 24 mm overall



Note

3D models of congatec products are available at www.congatec.com/login. These models indicate the overall length, height and width of each product. If you need login access, contact your local sales representative.

3.3 Environmental Specifications

Temperature	Operation: 0°C to +60°C	Storage: -20°C to +80°C
Relative Humidity	Operation: 10% to 85%	Storage: 5% to 85%



Caution

1. The above operating temperatures must be strictly adhered to at all times. When using a congatec heat spreader, the maximum operating temperature refers to any measurable spot on the heat spreader's surface.
2. Humidity specifications are for non-condensing conditions.



4 Connectors and Features

Primary Carrier Connector P1 (X1)

Table 4 Connector P1 (X1) Pinout

Pin	Row A	Pin	Row B	Pin	Row C	Pin	Row D
A01	VCC	B01	VCC	C01	VCC	D01	VCC
A02	VCC	B02	PWRBTN#	C02	RSTBTN#	D02	VCC
A03	VCC	B03	VCC	C03	VCC	D03	VCC
A04	VCC	B04	THERMTRIP#	C04	CARRIER_HOT#	D04	VCC
A05	VCC	B05	VCC	C05	VCC	D05	VCC
A06	VCC	B06	TAMPER#	C06	VIN_PWROK	D06	VCC
A07	VCC	B07	VCC	C07	VCC	D07	VCC
A08	VCC	B08	SUS_S3#	C08	SUS_S4_S5#	D08	VCC
A09	VCC	B09	VCC	C09	VCC	D09	VCC
A10	GND	B10	WD_STROBE#	C10	GND	D10	WAKE0#
A11	BATLOW#	B11	WD_OUT	C11	FAN_PWMOUT	D11	WAKE1#
A12	PLTRST#	B12	GND	C12	FAN_TACHIN	D12	GND
A13	GND	B13	USB5-	C13	GND	D13	USB1-
A14	USB7-	B14	USB5+	C14	USB3-	D14	USB1+
A15	USB7+	B15	GND	C15	USB3+	D15	GND
A16	GND	B16	USB4-	C16	GND	D16	USB0-
A17	USB6-	B17	USB4+	C17	USB2-	D17	USB0+
A18	USB6+	B18	GND	C18	USB2+	D18	GND
A19	GND	B19	I2S_LRCLK/SNDW_CLK3	C19	GND	D19	DDIO_SDA_AUX-
A20	DDI1_SDA_AUX-	B20	I2S_DOUT/SNDW_DAT3	C20	SNDW_DMIC_CLK1	D20	DDIO_SCL_AUX+
A21	DDI1_SCL_AUX+	B21	I2S_MCLK	C21	SNDW_DMIC_DAT1	D21	GND
A22	GND	B22	I2S_DIN/SNDW_DAT2	C22	GND	D22	DDIO_PAIR0-
A23	DDI1_PAIR0-	B23	I2S_CLK/SNDW_CLK2	C23	SNDW_DMIC_CLK0	D23	DDIO_PAIR0+
A24	DDI1_PAIR0+	B24	VCC_5V_SBY	C24	SNDW_DMIC_DAT0	D24	GND
A25	GND	B25	USB67_OC#	C25	GND	D25	DDIO_PAIR1-
A26	DDI1_PAIR1-	B26	USB45_OC#	C26	DDIO_DDC_AUX_SEL	D26	DDIO_PAIR1+
A27	DDI1_PAIR1+	B27	USB23_OC#	C27	DDI1_DDC_AUX_SEL	D27	GND
A28	GND	B28	USB01_OC#	C28	DDIO_HPD	D28	DDIO_PAIR2-
A29	DDI1_PAIR2-	B29	SML1_CLK	C29	DDI1_HPD	D29	DDIO_PAIR2+
A30	DDI1_PAIR2+	B30	SML1_DAT	C30	eDP_HPD	D30	GND
A31	GND	B31	PMCALERT#	C31	eDP_VDD_EN	D31	DDIO_PAIR3-
A32	DDI1_PAIR3-	B32	SML0_CLK	C32	eDP_BKLT_EN	D32	DDIO_PAIR3+
A33	DDI1_PAIR3+	B33	SML0_DAT	C33	eDP_BKLTCTL	D33	GND
A34	GND	B34	USB_PD_ALERT#	C34	GND	D34	AC_PRESENT



A35	eDP_AUX-	B35	USB_PD_I2C_CLK	C35	USB1_AUX-	D35	RSVD
A36	eDP_AUX+	B36	USB_PD_I2C_DAT	C36	USB1_AUX+	D36	GND
A37	GND	B37	USB_RT_ENA	C37	GND	D37	USB1_SSTX0-
A38	eDP_TX0-	B38	USB1_LSRX	C38	USB1_SSRX0-	D38	USB1_SSTX0+
A39	eDP_TX0+	B39	USB1_LSTX	C39	USB1_SSRX0+	D39	GND
A40	GND	B40	USB0_LSRX	C40	GND	D40	USB1_SSTX1-
A41	eDP_TX1-	B41	USB0_LSTX	C41	USB1_SSRX1-	D41	USB1_SSTX1+
A42	eDP_TX1+	B42	GND	C42	USB1_SSRX1+	D42	GND
A43	GND	B43	USB0_AUX-	C43	GND	D43	USB0_SSTX0-
A44	eDP_TX2-	B44	USB0_AUX+	C44	USB0_SSRX0-	D44	USB0_SSTX0+
A45	eDP_TX2+	B45	LID#	C45	USB0_SSRX0+	D45	GND
A46	GND	B46	SLEEP#	C46	GND	D46	USB0_SSTX1-
A47	eDP_TX3-	B47	VCC_BOOT_SPI	C47	USB0_SSRX1-	D47	USB0_SSTX1+
A48	eDP_TX3+	B48	BOOT_SPI_CS#	C48	USB0_SSRX1+	D48	GND
A49	GND	B49	BSEL0	C49	GND	D49	SATA0_RX-
A50	eSPI_IO0	B50	BSEL1	C50	BOOT_SPI_IO0	D50	SATA0_RX+
A51	eSPI_IO1	B51	BSEL2	C51	BOOT_SPI_IO1	D51	GND
A52	eSPI_IO2	B52	eSPI_ALERT0#	C52	BOOT_SPI_IO2	D52	SATA0_TX-
A53	eSPI_IO3	B53	eSPI_ALERT1#	C53	BOOT_SPI_IO3	D53	SATA0_TX+
A54	eSPI_CLK	B54	eSPI_CS0#	C54	BOOT_SPI_CLK	D54	GND
A55	GND	B55	eSPI_CS1#	C55	GND	D55	SATA1_RX-
A56	PCIe_CLKREQ0_LO#	B56	eSPI_RST#	C56	PCIe_REFCLK0_HI-	D56	SATA1_RX+
A57	PCIe_CLKREQ0_HI#	B57	GND	C57	PCIe_REFCLK0_HI+	D57	GND
A58	GND	B58	PCIe_BMC_RX-	C58	GND	D58	SATA1_TX-
A59	PCIe_BMC_TX-	B59	PCIe_BMC_RX+	C59	PCIe_REFCLK0_LO-	D59	SATA1_TX+
A60	PCIe_BMC_TX+	B60	GND	C60	PCIe_REFCLK0_LO+	D60	GND
A61	GND	B61	PCIe08_RX-	C61	GND	D61	PCIe00_TX-
A62	PCIe08_TX-	B62	PCIe08_RX+	C62	PCIe00_RX-	D62	PCIe00_TX+
A63	PCIe08_TX+	B63	GND	C63	PCIe00_RX+	D63	GND
A64	GND	B64	PCIe09_RX-	C64	GND	D64	PCIe01_TX-
A65	PCIe09_TX-	B65	PCIe09_RX+	C65	PCIe01_RX-	D65	PCIe01_TX+
A66	PCIe09_TX+	B66	GND	C66	PCIe01_RX+	D66	GND
A67	GND	B67	PCIe10_RX-	C67	GND	D67	PCIe02_TX-
A68	PCIe10_TX-	B68	PCIe10_RX+	C68	PCIe02_RX-	D68	PCIe02_TX+
A69	PCIe10_TX+	B69	GND	C69	PCIe02_RX+	D69	GND
A70	GND	B70	PCIe11_RX-	C70	GND	D70	PCIe03_TX-
A71	PCIe11_TX-	B71	PCIe11_RX+	C71	PCIe03_RX-	D71	PCIe03_TX+
A72	PCIe11_TX+	B72	GND	C72	PCIe03_RX+	D72	GND
A73	GND	B73	PCIe12_RX-	C73	GND	D73	PCIe04_TX-



A74	PCle12_TX-	B74	PCle12_RX+	C74	PCle04_RX-	D74	PCle04_TX+
A75	PCle12_TX+	B75	GND	C75	PCle04_RX+	D75	GND
A76	GND	B76	PCle13_RX-	C76	GND	D76	PCle05_TX-
A77	PCle13_TX-	B77	PCle13_RX+	C77	PCle05_RX-	D77	PCle05_TX+
A78	PCle13_TX+	B78	GND	C78	PCle05_RX+	D78	GND
A79	GND	B79	PCle14_RX-	C79	GND	D79	PCle06_TX-
A80	PCle14_TX-	B80	PCle14_RX+	C80	PCle06_RX-	D80	PCle06_TX+
A81	PCle14_TX+	B81	GND	C81	PCle06_RX+	D81	GND
A82	GND	B82	PCle15_RX-	C82	GND	D82	PCle07_TX-
A83	PCle15_TX-	B83	PCle15_RX+	C83	PCle07_RX-	D83	PCle07_TX+
A84	PCle15_TX+	B84	GND	C84	PCle07_RX+	D84	GND
A85	GND	B85	TEST#	C85	GND	D85	NBASET0_MDI0-
A86	VCC_RTC	B86	RSMRST_OUT#	C86	SMB_CLK	D86	NBASET0_MDI0+
A87	SUS_CLK	B87	UART1_TX	C87	SMB_DAT	D87	GND
A88	GPIO_00	B88	UART1_RX	C88	SMB_ALERT#	D88	NBASET0_MDI1-
A89	GPIO_01	B89	UART1_RTS#	C89	UART0_TX	D89	NBASET0_MDI1+
A90	GPIO_02	B90	UART1_CTS#	C90	UART0_RX	D90	GND
A91	GPIO_03	B91	IPMB_CLK	C91	UART0_RTS#	D91	NBASET0_MDI2-
A92	GPIO_04	B92	IPMB_DAT	C92	UART0_CTS#	D92	NBASET0_MDI2+
A93	GPIO_05	B93	GP_SPI_MOSI	C93	I2C0_CLK	D93	GND
A94	GPIO_06	B94	GP_SPI_MISO	C94	I2C0_DAT	D94	NBASET0_MDI3-
A95	GPIO_07	B95	GP_SPI_CS0#	C95	I2C0_ALERT#	D95	NBASET0_MDI3+
A96	GPIO_08	B96	GP_SPI_CS1#	C96	I2C1_CLK	D96	GND
A97	GPIO_09	B97	GP_SPI_CS2#	C97	I2C1_DAT	D97	NBASET0_LINK_MAX#
A98	GPIO_10	B98	GP_SPI_CS3#	C98	NBASET0_SDP	D98	NBASET0_LINK_MID#
A99	GPIO_11	B99	GP_SPI_CLK	C99	NBASET0_CTREF	D99	NBASET0_LINK_ACT#
A100	TYPE0	B100	GP_SPI_ALERT#	C100	TYPE1	D100	TYPE2



Secondary Carrier Connector P2 (X4)

Table 5 Connector P2 (X4) Pinout

Pin	Row E	Pin	Row F	Pin	Row G	Pin	Row H
E1	RAPID_SHUTDOWN	F1	RSVD	G1	RSVD	H1	GND
E2	GND	F2	RSVD	G2	GND	H2	USB2_SSTX0-
E3	DDI2_SDA_AUX-	F3	RSVD	G3	USB2_SSRX0-	H3	USB2_SSTX0+
E4	DDI2_SCL_AUX+	F4	RSVD	G4	USB2_SSRX0+	H4	GND
E5	GND	F5	RSVD	G5	GND	H5	USB2_SSTX1-
E6	DDI2_PAIR0-	F6	RSVD	G6	USB2_SSRX1-	H6	USB2_SSTX1+
E7	DDI2_PAIR0+	F7	RSVD	G7	USB2_SSRX1+	H7	GND
E8	GND	F8	RSVD	G8	GND	H8	USB3_SSTX0-
E9	DDI2_PAIR1-	F9	RSVD	G9	USB3_SSRX0-	H9	USB3_SSTX0+
E10	DDI2_PAIR1+	F10	RSVD	G10	USB3_SSRX0+	H10	GND
E11	GND	F11	RSVD	G11	GND	H11	USB3_SSTX1-
E12	DDI2_PAIR2-	F12	RSVD	G12	USB3_SSRX1-	H12	USB3_SSTX1+
E13	DDI2_PAIR2+	F13	RSVD	G13	USB3_SSRX1+	H13	GND
E14	GND	F14	RSVD	G14	GND	H14	USB2_AUX-
E15	DDI2_PAIR3-	F15	RSVD	G15	USB3_LSRX	H15	USB2_AUX+
E16	DDI2_PAIR3+	F16	RSVD	G16	USB3_LSTX	H16	GND
E17	GND	F17	RSVD	G17	USB2_LSRX	H17	USB3_AUX-
E18	DDI2_DDC_AUX_SEL	F18	RSVD	G18	USB2_LSTX	H18	USB3_AUX+
E19	DDI2_HPD	F19	GND	G19	PEG_LANE_REV#	H19	GND
E20	GND	F20	PCIe32_RX-	G20	GND	H20	PCIe40_TX-
E21	PCIe32_TX-	F21	PCIe32_RX+	G21	PCIe40_RX-	H21	PCIe40_TX+
E22	PCIe32_TX+	F22	GND	G22	PCIe40_RX+	H22	GND
E23	GND	F23	PCIe33_RX-	G23	GND	H23	PCIe41_TX-
E24	PCIe33_TX-	F24	PCIe33_RX+	G24	PCIe41_RX-	H24	PCIe41_TX+
E25	PCIe33_TX+	F25	GND	G25	PCIe41_RX+	H25	GND
E26	GND	F26	PCIe34_RX-	G26	GND	H26	PCIe42_TX-
E27	PCIe34_TX-	F27	PCIe34_RX+	G27	PCIe42_RX-	H27	PCIe42_TX+
E28	PCIe34_TX+	F28	GND	G28	PCIe42_RX+	H28	GND
E29	GND	F29	PCIe35_RX-	G29	GND	H29	PCIe43_TX-
E30	PCIe35_TX-	F30	PCIe35_RX+	G30	PCIe43_RX-	H30	PCIe43_TX+
E31	PCIe35_TX+	F31	GND	G31	PCIe43_RX+	H31	GND
E32	GND	F32	PCIe36_RX-	G32	GND	H32	PCIe44_TX-
E33	PCIe36_TX-	F33	PCIe36_RX+	G33	PCIe44_RX-	H33	PCIe44_TX+
E34	PCIe36_TX+	F34	GND	G34	PCIe44_RX+	H34	GND
E35	GND	F35	PCIe37_RX-	G35	GND	H35	PCIe45_TX-
E36	PCIe37_TX-	F36	PCIe37_RX+	G36	PCIe45_RX-	H36	PCIe45_TX+
E37	PCIe37_TX+	F37	GND	G37	PCIe45_RX+	H37	GND



E38	GND	F38	PCle38_RX-	G38	GND	H38	PCle46_TX-
E39	PCle38_TX-	F39	PCle38_RX+	G39	PCle46_RX-	H39	PCle46_TX+
E40	PCle38_TX+	F40	GND	G40	PCle46_RX+	H40	GND
E41	GND	F41	PCle39_RX-	G41	GND	H41	PCle47_TX-
E42	PCle39_TX-	F42	PCle39_RX+	G42	PCle47_RX-	H42	PCle47_TX+
E43	PCle39_TX+	F43	GND	G43	PCle47_RX+	H43	GND
E44	GND	F44	PCle16_RX-	G44	GND	H44	PCle24_TX-
E45	PCle16_TX-	F45	PCle16_RX+	G45	PCle24_RX-	H45	PCle24_TX+
E46	PCle16_TX+	F46	GND	G46	PCle24_RX+	H46	GND
E47	GND	F47	PCle17_RX-	G47	GND	H47	PCle25_TX-
E48	PCle17_TX-	F48	PCle17_RX+	G48	PCle25_RX-	H48	PCle25_TX+
E49	PCle17_TX+	F49	GND	G49	PCle25_RX+	H49	GND
E50	GND	F50	PCle18_RX-	G50	GND	H50	PCle26_TX-
E51	PCle18_TX-	F51	PCle18_RX+	G51	PCle26_RX-	H51	PCle26_TX+
E52	PCle18_TX+	F52	GND	G52	PCle26_RX+	H52	GND
E53	GND	F53	PCle19_RX-	G53	GND	H53	PCle27_TX-
E54	PCle19_TX-	F54	PCle19_RX+	G54	PCle27_RX-	H54	PCle27_TX+
E55	PCle19_TX+	F55	GND	G55	PCle27_RX+	H55	GND
E56	GND	F56	PCle20_RX-	G56	GND	H56	PCle28_TX-
E57	PCle20_TX-	F57	PCle20_RX+	G57	PCle28_RX-	H57	PCle28_TX+
E58	PCle20_TX+	F58	GND	G58	PCle28_RX+	H58	GND
E59	GND	F59	PCle21_RX-	G59	GND	H59	PCle29_TX-
E60	PCle21_TX-	F60	PCle21_RX+	G60	PCle29_RX-	H60	PCle29_TX+
E61	PCle21_TX+	F61	GND	G61	PCle29_RX+	H61	GND
E62	GND	F62	PCle22_RX-	G62	GND	H62	PCle30_TX-
E63	PCle22_TX-	F63	PCle22_RX+	G63	PCle30_RX-	H63	PCle30_TX+
E64	PCle22_TX+	F64	GND	G64	PCle30_RX+	H64	GND
E65	GND	F65	PCle23_RX-	G65	GND	H65	PCle31_TX-
E66	PCle23_TX-	F66	PCle23_RX+	G66	PCle31_RX-	H66	PCle31_TX+
E67	PCle23_TX+	F67	GND	G67	PCle31_RX+	H67	GND
E68	GND	F68	RSVD	G68	GND	H68	RSVD
E69	RSVD	F69	RSVD	G69	RSVD	H69	RSVD
E70	RSVD	F70	GND	G70	RSVD	H70	GND
E71	RSVD	F71	NBASET1_MDI0-	G71	GND	H71	CSI1_RX0-
E72	RSVD	F72	NBASET1_MDI0+	G72	CSI0_RX0-	H72	CSI1_RX0+
E73	RSVD	F73	GND	G73	CSI0_RX0+	H73	GND
E74	RSVD	F74	NBASET1_MDI1-	G74	GND	H74	CSI1_RX1-
E75	RSVD	F75	NBASET1_MDI1+	G75	CSI0_RX1-	H75	CSI1_RX1+
E76	RSVD	F76	GND	G76	CSI0_RX1+	H76	GND
E77	RSVD	F77	NBASET1_MDI2-	G77	GND	H77	CSI1_RX2-
E78	NBASET1_CTREF	F78	NBASET1_MDI2+	G78	CSI0_RX2-	H78	CSI1_RX2+
E79	NBASET1_SDP	F79	GND	G79	CSI0_RX2+	H79	GND



E80	NBASET1_LINK_MID#	F80	NBASET1_MDI3-	G80	GND	H80	CSI1_RX3-
E81	NBASET1_LINK_ACT#	F81	NBASET1_MDI3+	G81	CSIO_RX3-	H81	CSI1_RX3+
E82	NBASET1_LINK_MAX#	F82	GND	G82	CSIO_RX3+	H82	GND
E83	GND	F83	RSVD	G83	GND	H83	CSI1_CLK-
E84	RSVD	F84	RSVD	G84	CSIO_CLK-	H84	CSI1_CLK+
E85	RSVD	F85	GND	G85	CSIO_CLK+	H85	GND
E86	GND	F86	ETH0_TX-	G86	GND	H86	CSI1_I2C_CLK
E87	ETH0_RX-	F87	ETH0_TX+	G87	CSIO_I2C_CLK	H87	CSI1_I2C_DAT
E88	ETH0_RX+	F88	GND	G88	CSIO_I2C_DAT	H88	CSI1_MCLK
E89	GND	F89	ETH1_TX-	G89	CSIO_MCLK	H89	CSI1_RST#
E90	ETH1_RX-	F90	ETH1_TX+	G90	CSIO_RST#	H90	CSI1_ENA
E91	ETH1_RX+	F91	GND	G91	CSIO_ENA	H91	GND
E92	GND	F92	PCIe_REFCLK2-	G92	GND	H92	PCIe_REFCLKIN0-
E93	PCIe_REFCLK1-	F93	PCIe_REFCLK2+	G93	RSVD	H93	PCIe_REFCLKIN0+
E94	PCIe_REFCLK1+	F94	GND	G94	RSVD	H94	GND
E95	GND	F95	RSVD	G95	GND	H95	PCIe_REFCLKIN1-
E96	PCIe_CLKREQ1#	F96	ETH0-1_PRST#	G96	ETH0-1_I2C_CLK	H96	PCIe_REFCLKIN1+
E97	PCIe_CLKREQ2#	F97	ETH0-1_PHY_RST#	G97	ETH0-1_I2C_DAT	H97	GND
E98	PCIe_CLKREQ_OUT0#	F98	ETH0_SDP	G98	ETH0-1_PHY_INT#	H98	ETH0-1_MDIO_CLK
E99	PCIe_CLKREQ_OUT1#	F99	ETH1_SDP	G99	ETH0-1_INT#	H99	ETH0-1_MDIO_DAT
E100	PCIe_PERST_IN0#	F100	PCIe_PERST_IN1#	G100	PCIe_WAKE_OUT0#	H100	PCIe_WAKE_OUT1#



4.1 Power Supply Connectors

The conga-HPC/uATX-Client provides the following power supply connectors:

- standard 24-pin ATX power connector (X63)
- additional 4-pin ATX12V power connector (X64)
- 8-21 Vmax DC banana jacks (X60, X61)




- Note**
1. Do not supply power via the DC banana jacks and the ATX connectors at the same time.
 2. In ATX mode, power must be supplied to the 24-pin ATX (X63) and the 4-pin ATX12V (X64) power connectors.
 3. In ATX mode, the 3.3 V, 5 V, and 12 V are derived from the ATX power supply. If power is supplied via the DC banana jacks, the onboard DC/DC regulators generate the 3.3 V, 5 V and 12 V. The onboard buck-boost converter generates the 12 V from 8-21 Vmax.

4.1.1 ATX Power Connectors

The conga-HPC/uATX-Client provides a standard 24-pin ATX power connector (X63) and 4-pin ATX12V power connector (X64) for an ATX power supply. Power must be supplied to both connectors. With an ATX power supply, the COM-HPC® module starts after you press the power-on button SW12 (ATX mode).

SW12




To configure the power supply to operate in AT mode, set DIP SW16.2 to ON. In this mode, the module starts after the power switch on the power supply is turned on.

Table 6 SW16.2 - ATX/AT PSU Settings

Setting	Configuration
OFF	ATX mode (default)
ON	AT mode

SW16





Jumper JP12 can be used to disconnect the 5 V standby voltage from the whole system.

Table 7 JP12 - ATX 5V Standby Settings

Pin	Description
1-2	5V standby connected (default)
2-3	5V standby disconnected




 Connector Type

JP12: 2.54 mm, 2-pin jumper

Table 8 X63 - 24-Pin ATX Power Pinout

Pin	Signal	Description	Pin	Signal	Description
1	+3.3V	Power supply +3.3 VDC	13	+3.3V	Power supply +3.3 VDC
2	+3.3V	Power supply +3.3 VDC	14	-12V	Power supply -12 VDC
3	GND	Power ground	15	GND	Power ground
4	+5V	Power supply +5 VDC	16	PS_ON#	Power Supply On (active low). Short this pin to GND to switch power supply ON; disconnect from GND to switch OFF.
5	GND	Power ground	17	GND	Power ground
6	+5V	Power supply +5 VDC	18	GND	Power ground
7	GND	Power ground	19	GND	Power ground
8	VIN_ PWR_OK	Power Ok	20	N.C	
9	5V_SB	Standby power supply +5 VDC	21	+5V	Power supply +5 VDC
10	+12V	Power supply +12 VDC	22	+5V	Power supply +5 VDC
11	+12V	Power supply +12 VDC	23	+5V	Power supply +5 VDC
12	+3.3V	Power supply +3.3 VDC	24	GND	Power ground

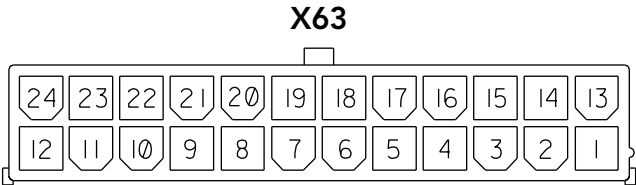

 Connector Type

X63: Standard 24-pin ATX Power connector

 Note


The -12 V power output of the ATX power supply is not used.



Table 9 X64 - 4-Pin ATX12V Power Pinout

Pin	Signal	Description	Pin	Signal	Description
1	GND	Power ground	2	GND	Power ground
3	+12V	Power supply +12 VDC	4	+12V	Power supply +12 VDC

X64



Connector Type

X64: Standard 4-pin ATX12V Power connector

4.1.2 DC Banana Jacks

The conga-HPC/uATX-Client provides two banana jacks (X60, X61) for a DC power supply to power both the module and the voltage regulators on the carrier board. The maximum power rating per banana jack is 16 A. Although the carrier board is designed for the input voltage range of 8-21 Vmax, the input voltage range is defined by the module. For more information, see section 4.1.6 “Module Type Detection”.



Caution


Do not exceed the voltage rating of the COM-HPC® module. Doing so will damage the module.

Table 10 X60, X61 - DC Banana Jacks Pinout

Connector	Description
X60	Input voltage for module and carrier board (usually +12 V)
X61	Ground

X61

X60



Connector Type


X60, X61: 4 mm diameter banana plug (max. 16 A)

The onboard buck-boost converter that generates 12 V from 8-21 Vmax in AT mode can be disabled via DIP switch SW16.1.

Table 11 SW16.1 - Buck-Boost Converter Settings

Setting	Description
OFF	Enabled (default)
ON	Disabled

SW16






4.1.3 Power States LEDs

The LEDs D75-D76 and D79-D83 indicate the different power states of the conga-HPC/uATX-Client as described in the table below.

Table 12 Power LEDs Status

LED	Status	Description
All	Off	No power applied.
All	On	ATX power supply is fully switched on, with stable 3.3 V, 5 V and 12 V. (D82 is off in AT mode)
D75	On	The green LED indicates the status of SUS_S4#
D76	On	The green LED indicates the status of SUS_S3#
D79	On	The yellow LED indicates that the onboard 3.3 V standby power is present
D80	On	The green LED indicates that 12 V main power is present
D81	On	The green LED indicates that 5 V main power is present
D82	On	The yellow LED indicates that 5V standby power is applied to the conga-HPC/EVAL-Client. If only D82 lights, it indicates that the ATX power supply is mechanically switched on and only 5 V standby power is applied to the conga-HPC/uATX-Client.
D83	On	The green LED indicates that the onboard 3.3 V main power is present




4.1.4 VIN_PWR_OK Signal

The VIN_PWR_OK signal is a high-active input from the main power supply to the module. It indicates whether the power is good.

Use jumper JP8 to configure the VIN_PWR_OK signal.

Table 13 JP8 - VIN_PWR_OK Signal Settings

Pin	Description
1 - 2	Add 3.3V pull-up to VIN_PWR_OK signal (for debug purposes)
3 - 4	Connect VIN_PWR_OK signal from ATX power supply (default)
5 - 6	Connect VIN_PWR_OK signal from onboard DC/DC regulator (only in single 12 V mode)



Connector Type

JP8: 2.54 mm, 2-pin jumper



4.1.5 Power-Up Control

The module's SUS_S3# signal controls the ATX power supply control signal (PS_ON#). When the system goes to Suspend to RAM (S3) or Soft Off (S5), the module's chipset asserts the SUS_S3# signal. Through the use of an inverter, the low active PS_ON# signal goes high and switches off the ATX power supply.

When the system is in a power-down system state, any system wake-up event invokes the chipset of the module to deassert the SUS_S3# signal. With the deassertion, the system transitions to Full-On state (S0).

4.1.6 Module Type Detection

The signals TYPE0, TYPE1, and TYPE2 indicate the pinout type of the module connected to the carrier board. These pins are either open (NC) or strapped to ground (GND) by the module as shown in the table below.

Table 14 Module Type Detection Pinout Description

TYPE2	TYPE1	TYPE0	Meaning
NC	NC	NC	Reserved
NC	NC	GND	Reserved
NC	GND	NC	Reserved
NC	GND	GND	Server Module - Fixed 12V Input
GND	NC	NC	Reserved
GND	NC	GND	Reserved
GND	GND	NC	Client Module - Wide Range 8V to 20V input
GND	GND	GND	Client Module - Fixed 12V input



Note

If the conga-HPC/uATX-Client detects an incompatible module pinout, an onboard logic prevents the board from powering up the whole system by controlling the PS_ON# signal of the ATX power supply. Only works in ATX mode. AT mode does not support this feature.



Jumper JP11 can be used to manually set the TYPE0 signal to NC (Client Module 8-20V) or check the module TYPE0 signal.

Table 15 JP11 - TYPE0 Signal Settings

Pin	Description
1-2	Check module TYPE0 signal
2-3	NC (Client Module 8-20V) (default)

JP11



Connector Type

JP11: 2.54 mm, 2-pin jumper

4.2 CMOS Battery Holder

The conga-HPC/uATX-Client provides battery holder M25 for a CR2032 battery. The battery supplies power to the RTC and CMOS memory.



Warning

Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.

Jumper JP10 can be used to disconnect the battery.

Table 16 JP10 - Battery Settings

Pin	Description
1 - 2	Connect battery (default)
2 - 3	Disconnect the battery

JP10



M25



Connector Type

JP10: 2.54 mm, 2-pin jumper

M25: CR2032 battery



4.3 PCIe Connectors

The conga-HPC/uATX-Client provides the following PCIe connectors:

- two PCIe x16 slots X14, X15 (PCIe lanes [16:31] and [32:47] respectively)
- two PCIe x4 slots X11, X12 (PCIe lanes [4:7] and [12:15] respectively)
- one M.2 key B socket X7 (PCIe lanes [0:1])
- one M.2 key E socket X67 (PCIe lanes [2:3])
- one M.2 key M socket X13 (PCIe lanes [8:11])

4.3.1 PCIe Clock Request Signal Settings

The clock request signal (PCIe_CLKREQ0_LO#) can be permanently enabled via jumper JP15 for :

- M.2 key B sockets X7, X67, and PCIe x4 slot X11

The clock request signal (PCIe_CLKREQ0_HI#) can be permanently enabled via jumper JP1 for:

- M.2 key M socket X13 and PCIe x4 slot X12

Table 17 JP1, JP15 - PCIe CLKREQ Signal Settings

Pin	Description
1 - 2	Enable permanently
2 - 3	Enable (default)



Connector Type

JP1, JP15: 2.54 mm, 2-pin jumper

DIP SW18 can force clock request signal for the M.2 Key M socket X13—even if it is set to “Enable permanently” via jumper JP1.

Table 18 SW18 - M.2 Key M (X13) CLKREQ Signal Settings

Switch	Configuration	Description
SW18	OFF	Enable
	ON	Disable



4.3.2 PCIe x16 Slots

The conga-HPC/uATX-Client provides two standard PCIe x16 slots:


- PCIe lanes [16:31] on connector X14 (PEG Port)
- PCIe lanes [32:47] on connector X15



Connector Type

X14, X15: PCIe x16 card

X14, X15



4.3.3 PCIe x4 Slots

The conga-HPC/uATX-Client provides two standard PCIe x4 slots:


- PCIe lanes [4:7] on connector X11
- PCIe lanes [12:15] on connector X12



Connector Type

X11, X12: PCIe x4 card

X11, X12



4.3.4 M.2 Key B (X7) + micro-SIM Card Slot

The conga-HPC/uATX-Client provides M.2 Key B socket X7 for 3042, 2242, 2260, and 2280 cards. The socket is routed to the module's PCIe lanes [0:1] and USB Port 6. LED D6 lights red when there is activity on this socket.

The UIM interface of the M.2 Key B (X7) socket is connected to micro-SIM card slot X8.




Connector Type

X7: M.2 Key B card size 3042, 2242, 2260, 2280

X8: micro-SIM card


X7



D6



X8





Use DIP SW1 and SW2 to configure the M.2 Key B (X7) settings as described in the two tables below.

Table 19 SW1 - M.2 Key B (X7) Settings

Switch	Configuration	Description
SW1.1	OFF	Disconnect M.2 SMB_ALERT# (default)
	ON	Connect M.2 SMB_ALERT#
SW1.2	OFF	Disconnect WOWWAN# (default)
	ON	Connect WOWWAN# to COM-HPC signal WAKE1#
SW1.3	OFF	Connect M.2 SMB_DAT/CLK (default)
	ON	Disconnect M.2 SMB_DAT/CLK
SW1.4	OFF	Deactive M.2 full card power-off control
	ON	Activate M.2 full card power-off control



Table 20 SW2 - M.2 Key B (X7) Settings


Switch	Configuration	Description
SW2.2	OFF	Deactivate M.2 reset control (default)
	ON	Activate M.2 reset control
SW2.3	OFF	Deactivate M.2 WDIS2# control - wireless 2 (default)
	ON	Activate M.2 WDIS2# control
SW2.4	OFF	Deactivate M.2 WDIS1# control - wireless 1 (default)
	ON	Activate M.2 WDIS1# control





4.3.5 M.2 Key E (X67)

The conga-HPC/uATX-Client provides a standard M.2 Key E socket X67 for 2230 and 3030 cards. The socket is routed to the module's PCIe lanes [2:3] and USB Port 7. LED D8 and D102 lights red when there is activity on this socket.



Connector Type

X67: M.2 Key E card size 2230, 3030

Use DIP SW4 to configure the M.2 Key E (X67) settings as described in the two tables below.


Table 21 SW4 - M.2 Key E (X67) Settings

Switch	Configuration	Description
SW4.3	OFF	Deactivate M.2 WDIS2# control - wireless 2 (default)
	ON	Activate M.2 WDIS2# control
SW4.4	OFF	Deactivate M.2 WDIS1# control - wireless 1 (default)
	ON	Activate M.2 WDIS1# control



4.3.6 M.2 Key M (X13)

The conga-HPC/uATX-Client provides a standard M.2 Key M socket X13 for 2242, 2260, 2280, and 22110 cards. The socket is routed to the module's PCIe lanes [8:11]. LED D9 lights yellow when there is activity on this socket.



Connector Type

X13: M.2 Key M card size 2242, 2260, 2280, 22110




4.4 Display Interfaces

4.4.1 eDP

The conga-HPC/uATX-Client connects the module's eDP interface to connector X26.

Table 22 X26 - eDP Pinout

Pin	Signal	Pin	Signal
1	N.C.	21	PANEL_PWR
2	GND	22	N.C.
3	eDP_TX3-	23	GND
4	eDP_TX3+	24	GND
5	GND	25	GND
6	eDP_TX2-	26	GND
7	eDP_TX2+	27	eDP_HPD
8	GND	28	GND
9	eDP_TX1-	29	GND
10	eDP_TX1+	30	GND
11	GND	31	GND
12	eDP_TX0-	32	eDP_LVDS_BKLT_EN
13	eDP_TX0+	33	eDP_LVDS_BKLT_CTRL
14	GND	34	N.C.
15	eDP_AUX+	35	N.C.
16	eDP_AUX-	36	N.C.
17	GND	37	BKLT_PWR
18	PANEL_PWR	38	BKLT_PWR
19	PANEL_PWR	39	BKLT_PWR
20	PANEL_PWR	40	N.C.



Connector Type

X26: 0.5 mm, 40 Pos. (ACES 50203-04001-001 or compatible)



4.4.1.1 eDP Panel and Backlight Power Supply

The power supply for eDP panels and backlight inverter is available on connector X27. LED D38 lights red when power for the flat panel is on. LED D39 lights red when power for the backlight is on.

Table 23 X27 - eDP Power Pinout

Pin	Signal	Pin	Signal
1	VDD_LFP (Switched by EDP_VDD_EN)	2	VDD_BKLT (Switched by EDP_BKLT_EN)
3	+5V (2.0 A fuse)	4	+12V (1.5 A fuse)
5	EDP_VDD_EN	6	EDP_BKLT_EN
7	N.C	8	EDP_BKLT_CTRL_R
9	GND	10	GND



Connector Type

X27: 2.54 mm, 2x5 pin female connector

4.4.1.2 Flat Panel and Backlight Voltage Selection

The conga-HPC/uATX-Client supports different voltages for the panel and backlight. Follow the descriptions in the tables below to set the panel and backlight voltages.

Table 24 JP2 - Flat Panel Voltage Settings

Pin	Description
1-2	5 V panel power (default)
2-3	3.3 V panel power





Table 25 JP3 - Backlight Voltage Settings

Pin	Description
1-2	12 V backlight Power (default)
2-3	5 V backlight Power



Connector Type

JP2, JP3: 2.54 mm grid jumper



4.4.2 DP++

The conga-HPC/uATX-Client provides three DP++ ports (X23, X24, and X25). The three DP++ ports are routed through a DisplayPort re-driver to support HBR3 data rate (up to 12 Gbps).



Connector Type

X23, X24, X25: Standard DP plug

X23, X24, X25



4.5 Universal Serial Bus (USB)

The conga-HPC/uATX-Client provides the following USB connectors:

- two USB4 Type-C (port 0 on connector X16; port 1 on connector X17)
- two USB 3.2 Gen 2x1 (dual-stacked) (ports 2 and 3 on connector X21)
- two USB 2.0 Type-A (dual-stacked) (ports 4 and 5 on connector X22)
- USB 2.0 @ M.2 Key B (port 6 on connector X7)
- USB 2.0 @ M.2 Key E (port 7 on connector X67)

The PMCALERT# signal can be disconnected via a jumper on pin header X20.

4.5.1 USB4 Type-C Ports

The conga-HPC/uATX-Client provides two USB4 Type-C ports (X16, X17) with support for Thunderbolt. For information about USB4, refer to the COM-HPC® Specification.



Note


USB 3.2 Gen 2x2 is not supported.

X16, X17



Connector Type

X16, X17: USB Type-C plug






4.5.2 USB 3.2 Gen 2x1 Type-A Ports

The conga-HPC/uATX-Client provides two USB 3.2 Gen 2x1 ports via a dual-stacked USB Type-A connector (X21). Each port provides up to 1.7 A.



Connector Type

X21: USB Type-A plug




4.5.3 USB 2.0 Type-A Ports

The conga-HPC/uATX-Client provides two USB 2.0 ports via a dual-stacked USB Type-A connector (X22). Each port provides up to 1.7 A.



Connector Type

X22: USB Type-A plug



4.5.4 PMCALERT# Jumper

The PMCALERT# signal can be disconnected via a jumper on pin header X20.


Table 26 X20 - PMCALERT# Settings

Pin	Description
1-2	PMCALERT# connected to COM-HPC® (default)
3-4	PMCALERT# disconnected



Connector Type

X20: 2.54 mm, 2x2 pin female connector





4.6 SATA

The conga-HPC/uATX-Client provides two standard SATA connectors (X28, X29):


- SATA0 port on connector X28
- SATA1 port on connector X29



Connector Type

X28, X29: Standard SATA plug

X28, X29




4.6.1 SATA Power

The conga-HPC/uATX-Client provides a standard 15-pin SATA power connector (X30).

Table 27 X30 - SATA Power Pinout

Pin	Signal
1, 2, 3	3.3 V (2 A fuse; resettable)
4, 5, 6	GND
7, 8, 9	5 V (2 A fuse; resettable)
10, 11, 12	GND
13, 14, 15	12 V (1.5 A fuse; resettable)

X30



Connector Type

X30: Standard 15-pin SATA power connector



4.7 Ethernet Ports

The conga-HPC/uATX-Client provides RJ45 ethernet ports X32 and X34. The NBASE-T Ethernet Controller [0:1] Software-Definable Pins (SDP) NBASET[0:1]_SDP are provided on pin headers X31 and X33:

- ETH0 port on connector X32
 - NBASET0_SDP on connector X31
- ETH1 port on connector X34
 - NBASET1_SDP on connector X33

The SDP pins can also be used for IEEE1588 support (e.g. 1PPS signal).

Table 28 X32, X34 - Ethernet Status LEDs Description

Color (LED)	Description
Green (right LED)	Link activity
Off (left bicolor LED)	100 Mbit
Green (left bicolor LED)	Half speed (Module specific)
Yellow (left bicolor LED)	Full speed (Module specific)

X32, X34




Table 29 X31 - NBASET0_SDP Header Pinout

Pin	Description
1	NBASET0_SDP signal
2	Ground

X31, X33




Table 30 X33 - NBASET1_SDP Header Pinout

Pin	Description
1	NBASET1_SDP signal
2	Ground



Connector Type

X32, X34: RJ45 plug

X31, X33: 1.25 mm, 2-pin female connector



4.8 Audio Interfaces

The conga-HPC/uATX-Client features the following audio interfaces:

- Audio Jack (4-pole) on connector X44
- Connector X45 for an external I²S/SoundWire[®] codec
- DMIC signals on connector X43

4.8.1 Audio Jack (4-Pole)

The conga-HPC/uATX-Client features a 4-pole audio jack (X44) for a 3.5 mm CTIA standard plug. This audio jack is connected to an onboard HDA codec (Cirrus Logic CS4207) by default

Table 31 X44 - Audio Jack Pinout


Pin	Jack	Signal	Description
1	Tip	LINE_L	Line-OUT - left channel
2	Ring 1	LINE_R	Line-OUT - right channel
3	Ring 2	A_GND	Analog ground
4	Sleeve	MIC	Microphone



Connector Type

X44: 3.5 mm, 4-pole CTIA standard plug

Audio Jack Plug

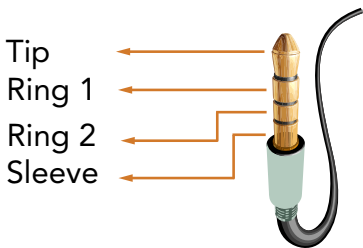

4.8.2 I²S/SoundWire[®]

The conga-HPC/uATX-Client features header X45 to connect a card with an external I²S or SoundWire[®] codec. In order to use this external codec instead of the onboard HDA codec, set DIP SW11.2 to ON.

Table 32 SW11.2 - Audio Input Selection

Setting	Description
ON	External I ² S/SoundWire [®] codec
OFF	Onboard HDA codec (default)

SW11







Table 33 X45 - I²S/SoundWire Header Pinout

Pin	Signal	Pin	Signal
1	GND	2	I2S_LRCLK/SNDW_CLK3
3	NC	4	I2S_CLK/SNDW_CLK2
5	NC	6	I2S_DIN/SNDW_DAT2
7	PLTRST#	8	I2S_DOUT/SNDW_DAT3
9	+V3.3S (fused)	10	I2S_MCLK
11	NC	12	I2C1_DAT
13	NC	14	I2C1_CLK

X45



Connector Type

X45: 2.54 mm, 2x7pin female connector

4.8.3 DMIC

The conga-HPC/uATX-Client features DMIC signals on connector X43.

Table 34 X43 - DMIC Header Pinout

Pin	Signal
1	+V1.8 (0.75 A fused)
2	DMIC_DAT
3	GND
4	DMIC_CLK
5	Key
6	NC

X43



Connector Type

X43: 2.54 mm, 6-pin female connector



4.9 I²C Buses

The COM-HPC® Specification defines two general purpose I²C buses (I2C[0:1]).

I2C0 Bus

The conga-HPC/uATX-Client provides the I2C0 signals on connector X47 and X53. For more information, see section 4.22 “I2C I/O Expander Pin Header” and section 4.18 “I2C0 Pin Header”.

The conga-HPC/uATX-Client provides an EEPROM 24C32 on the 8-pin DIL socket U50 for test purposes during system development. This EEPROM is connected to the I2C0 bus and has the I²C address 0xAE. Use the I²C control commands implemented in the congatec CGOS API driver to access the EEPROM. For more information, refer to the CGOS manual and the user’s guide of the COM-HPC® module.

I2C1 Bus

The conga-HPC/uATX-Client provides the I2C1 signals on connector X45 and X54. For more information, see section 4.8.2 “I²S/SoundWire®” and section 4.19 “I2C1 Pin Header”.



Connector Type

U50: 2-wire 3.3 V Serial EEPROMS in 8-pin DIL package

4.10 SPI Flash Socket

The conga-HPC/uATX-Client provides a 16-pin SOIC16 socket (X46) for an SPI flash.



Connector Type

X46: SPI flash in 16-pin SOIC16 package

The boot select pins BSEL[2:0] are routed to DIP SW10 and SW11:

- BSEL0 to DIP SW10.1
- BSEL1 to DIP SW10.2
- BSEL2 to DIP SW11.1

For the BIOS select options via these DP switches, refer to the table below.

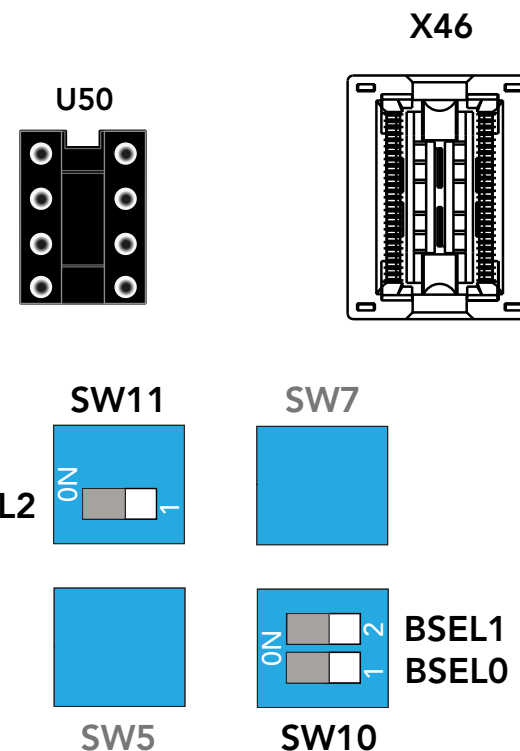




Table 35 BIOS Select Options

BSEL [2:0]	Chipset eSPI1_CS1# (If Available on chipset)	Chipset eSPI_CS2# (If Available on chipset)	Chipset SPI_CS0#	Chipset SPI_CS1#	Chipset eSPI0_CS0#	Boot Option	Use Case	Boot Option and CS# Routing Details
111	Carrier J1.B54 COM-HPC eSPI_CS0#	Carrier J1.B55 COM-HPC eSPI_CS1#	Module	Module	Module	MAFS on Module	Most Common Usage	CSME / DT on Chipset SPI0 device on Module BIOS on SPI0 or SPI1 on Module
						SAFS on Module	Module EC/MMC with SAFS BIOS on far side of EC/MMC	CSME / DT on Slave Attached Flash on Module BIOS on Module SAFS
110	Carrier J1.B54	Carrier J1.B55	Carrier J1.B48	Module	Module	MAFS on Carrier	Casino Gaming Removable BIOS option on Carrier	CSME / DT on Chipset SPI0 device on Carrier BIOS on SPI0 on Carrier or on SPI1 on Module
101	Carrier J1.B54	Carrier J1.B55	Module	Carrier J1.B48	Module	MAFS on Module	Casino Gaming Removable BIOS option on Carrier Alternate version	CSME / DT on Chipset SPI0 device on Module BIOS on SPI0 on Module or on SP1 on Carrier
011	Module	Carrier J1.B55	Module	Module	Carrier J1.B54 COM-HPC eSPI_CS0#	MAFS on Module	Same as 111 except eSPI_CS routing	CSME / DT on Chipset SPI0 device on Module BIOS on SPI0 or SPI1 on Module
010	Module	Carrier J1.B55	Module	Module	Carrier J1.B54	SAFS on Carrier	BIOS totally under Carrier BMC control	CSME / DT on Carrier SAFS BIOS on Carrier SAFS
001	Module	Carrier J1.B55	Module	Module	Carrier J1.B54	MAFS on Module and SAFS on Carrier	BIOS mostly under Carrier BMC control	CSME / DT on Chipset SPI0 device on Module BIOS on Carrier SAFS



For the conga-HPC/uATX-Client, the most common BSEL[2:0] settings are 111 and 110. Use DIP SW10.1 to switch between these two options.




4.11 Intel ISP Adaptor-C2 Connector

The conga-HPC/uATX-Client provides connector X48 for an Intel ISP Adaptor-C2.

Table 36 X48 - Intel ISP Adaptor-C2 Connector Pinout

Pin	Signal	Pin	Signal
1	Key	2	BOOT_SPI_CS0#
3	DEBUG_RST#	4	NC
5	GND	6	VCC_BOOT_SPI
7	SPI_CLK_ISP	8	SPI_IO2_ISP
9	SPI_IO3_ISP	10	SPI_IO1_ISP
11	NC	12	SPI_IO0_ISP
13	NC	14	NC
15	NC	16	NC
17	NC	18	NC
19	PLTRST#	20	NC

X48

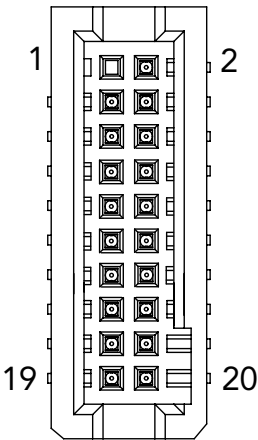


Use jumper JP7 to select the DEBUG_RST# trigger signal of the connector X48.

Table 37 JP7 - Debug Reset Trigger Signal Settings

Pin	Description
1-2	SYS_RST# (default)
2-3	VIN_PWR_OK#

JP7



Connector Type

X48: 1.27 mm, 2x10 pin female connector (For a matching connector, see www.dediprog.com/product/ISP-ADP-INTEL-C2)

JP7: 2.54 mm grid jumper




4.12 General Purpose SPI Port

The conga-HPC/uATX-Client provides a general purpose SPI port (CN2).

Table 38 CN2 - General Purpose SPI Port Pinout

Pin	Signals	Pin	Signals
1	GND	2	GP_SPI_CS0#
3	GP_SPI_CLK	4	NC
5	KEY	6	NC
7	SPI_RST#	8	GP_SPI_MISO
9	+V3.3S	10	GP_SPI_MOSI
11	SPI_RST# (PLTRST#)	12	GP_SPI_CS1#
13	+V3.3A	14	GP_SPI_ALERT#
15	GP_SPI_CS2#	16	GP_SPI_CS3#



Connector Type

CN2: 2.54 mm, 2x8 pin female connector

4.13 eSPI

On the conga-HPC/uATX-Client, the module's eSPI interface is routed to a Super I/O controller (Nuvoton NCT6122D).

The Super I/O controller provides the following interfaces:

- One eSPI header (X39)
- Two serial ports (X40 and X41)
- One 3-pin system fan header (X42)

The Super I/O controller also provides eSPI based Port 80 information via eight LEDs. For more information, see section 5.3 "Debug LEDs".



Use DIP SW6 to configure the Super I/O.

Table 39 SW6 - Super I/O Settings


Switch	Configuration	Description
SW6.1	OFF	Configuration IO address 2Eh (default)
	ON	Configuration IO address 4Eh
SW6.2	OFF	Super IO key selection 87h (default)
	ON	Super IO key selection 88h
SW6.3	OFF	Disables Super IO Port 80 control (default)
	ON	Enables Super IO Port 80 control
SW6.4	OFF	Enable Port 80 to UART Serial Output (default)
	ON	Disable Port 80 to UART Serial Output



DIP SW7.1 can be used to disable the Super I/O.

Table 40 SW7.1 - Super I/O Settings


Setting	Description
ON	Enable Super I/O (default)
OFF	Disable Super I/O



Use DIP SW7.2 to select eSPI_CS0# or eSPI_CSI1# for the Super I/O.

Table 41 SW7.2 - ESPI_CSI[0:1]# Settings

Setting	Description
ON	Selects eSPI_CS0# for Super I/O
OFF	Selects eSPI_CSI1# for Super I/O (default)






4.13.1 eSPI Header

The conga-HPC/uATX-Client provides eSPI signals on header X39.

Table 42 X39 - eSPI Header Pinout

Pin	Signals	Pin	Signals
1	GND	2	ESPI_CS0#
3	ESPI_CLK	4	ESPI_IO3
5	KEY	6	ESPI_IO2
7	SIO_RST#	8	ESPI_IO1
9	+V3.3S	10	ESPI_IO0
11	ESPI_RST#	12	ESPI_CS1#
13	+V3.3A	14	ESPI_ALERT0#

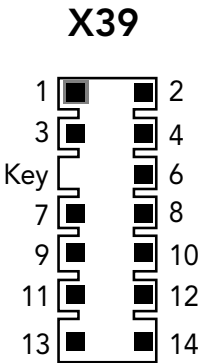

Connector Type

X39: 2.54 mm, 2x7 pin female connector

4.13.2 Serial Ports

The conga-HPC/uATX-Client supports up to four serial ports:

- Super I/O COM port 0 (RS-232/422/485) on connector X41
- Super I/O COM port 1 (RS-232) on connector X40
- Module UART0 on connector X37
- Module UART1 on connector X38




4.13.2.1 COM Port 0 Header

The conga-HPC/uATX-Client provides COM port 0 on connector X41 via the onboard Super I/O. The port supports RS-232, RS-422 and RS-485 I/O voltage levels.

Table 43 X41 - COM 0 Pinout

Pin	Signals	Pin	Signals
1	DCD#	2	DSR
3	RX	4	RTS#
5	TX	6	CTS#
7	DTR#	8	RI#
9	GND	10	+5V (750mA fuse)

X41



Connector Type

X41: 2.54 mm, 2x5 pin female connector

Use DIP SW8 and SW9 to configure the functionality of the COM port 0 transceiver.

Table 44 SW8 - COM Port 0 Transceiver Settings

SW 1	SW 2	Description
OFF	OFF	Loopback
ON	OFF	RS-232
OFF	ON	RS-485 half duplex
ON	ON	RS-485/RS-422 full duplex

SW8





Table 45 SW9 - COM Port 0 Transceiver Settings

Switch	Configuration	Description
SW8.1	OFF	1 Mbps SLEW
	ON	250 kbps SLEW LIMITING (for EMI)
SW8.2	OFF	RS-485/422 Termination disabled
	ON	RS-485/422 Termination enabled

SW9






4.13.2.2 COM Port 1 Header

The conga-HPC/uATX-Client provides COM port 1 on connector X40 via the onboard Super I/O.

Table 46 X40 - COM 1 Header Pinout

Pin	Signals	Pin	Signals
1	DCD#	2	DSR
3	RX	4	RTS#
5	TX	6	CTS#
7	DTR#	8	RI#
9	GND	10	+5V (750 mA fuse)

X40



Connector Type

X40: 2.54 mm, 2 x 5-pin female connector



Note

This port supports RS-232 I/O voltage levels only.


4.13.2.3 Module Serial Port 0

The conga-HPC/uATX-Client provides the module's serial port 0 (UART0) on header X37. UART0 is also connected to pins 19 and 21 of the feature connector X49. For more information, see section 4.16 "Feature Connector".

Table 47 X37 - UART0 Pinout

Pin	Signals	Pin	Signals
1	NC	2	NC
3	RX	4	RTS#
5	TX	6	CTS#
7	NC	8	NC
9	GND	10	+5V (750 mA fuse)

X37






DIP SW5.1 can be used to disable UART0.

Table 48 SW5.1 - Disable UART0


Switch	Configuration	Description
SW5.1	OFF	Enable UART0 (default)
	ON	Disable UART0



Use jumper JP4 to power the UART0 and UART1 RS-232 transmitter/receiver via +3.3 V runtime or standby power.

Table 49 JP4 - UART0 and UART1 Power Settings

Pin	Description
1-2	3.3 V runtime (default)
2-3	3.3 V standby



Connector Type

X37: 2.54 mm, 2x5 pin female connector

JP4: 2.54 mm grid jumper


4.13.2.4 Module Serial Port 1

The conga-HPC/uATX-Client provides the module’s serial port 1 (UART1) on header X38. UART1 is also connected to the feature connector X49. For more information, see section 4.3.6 “M.2 Key M (X13)” and section 4.16 “Feature Connector”.

Table 50 X38 - UART1 Pinout

Pin	Signals	Pin	Signals
1	NC	2	NC
3	RX	4	RTS#
5	TX	6	CTS#
7	NC	8	NC
9	GND	10	+5V (750 mA fuse)

X38






DIP SW5.2 can be used to disable UART1.

Table 51 SW5.2 - Disable UART1


Switch	Configuration	Description
SW5.2	OFF	Enable UART1 (default)
	ON	Disable UART1



Use jumper JP4 to power the UART0 and UART1 RS-232 transmitter/receiver via +3.3 V runtime or standby power.

Table 52 JP4 - UART0 and UART1 Power Settings

Pin	Configuration
1-2	3.3 V runtime (default)
2-3	3.3 V standby



Connector Type

X38: 2.54 mm, 2x5 pin female connector

JP4: 2.54 mm grid jumper


4.13.3 System Fan Header

The conga-HPC/uATX-Client provides a 3-pin fan connector X42 via the Super I/O controller.

Table 53 X42 - SYS Fan Pinout

Pin	Signal
1	GND
2	+VDD (12V/5V)
3	Sense

X42






Use jumper JP5 to set the fan’s supply voltage level.

Table 54 JP5 - Fan Voltage Settings


Pin	Description
1-2	12 V supply voltage for auxiliary fan (default)
2-3	5 V supply voltage for auxiliary fan



Use jumper JP6 to select the fan’s control source.

Table 55 JP6 - Fan Speed Settings

Pin	Description
1-2	Fan speed control via Super I/O located on the conga-HPC/uATX-Client (default)
2-3	Fan speed control via the COM-HPC® module
Open	Full fan speed if the pins are left open



 Connector Type

X42: 2.54 mm, 3-pin fan plug

JP5, JP6: 2.54 mm grid jumper

4.14 CPU and Module Fan Header

The conga-HPC/uATX-Client provides a standard 4-pin fan connector X57 for a CPU fan. The signals are shared with a smaller 4-pin connector X56 for a module fan.

Table 56 X57 - CPU Fan Header Pinout


Pin	Signal
1	GND
2	+VDD (12V/5V)
3	Sense
4	Control





Table 57 X56 - Module Fan Header Pinout

Pin	Signal
1	GND
2	+VDD (12V/5V)
3	Sense
4	Control



Connector Type

X56: 1.25 mm, 4-pin fan plug

Use jumper JP9 to set the fan's supply voltage level.

Table 58 JP9 - CPU and Module Fan Voltage Control

Pin	Configuration
1-2	12 V supply voltage (default)
2-3	5 V supply voltage



Connector Type

X57: 2.54 mm, 4-pin fan plug


JP9: 2.54 mm grid jumper

4.15 Debug Header

The conga-HPC/uATX-Client provides pin header X51 for measuring or debugging PCIE_WAKE# and PLTRST# signals.

Table 59 X51 - Debug Header Pinout

Pin	Signal	Pin	Signal
1	PLTRST#	2	GND
3	PCIE_WAKE#	4	GND



Connector Type

X51: 2.54 mm, 2x2 pin female connector



4.16 Feature Connector

The conga-HPC/uATX-Client provides pins with various signals on feature connector X49.

Table 60 X49 - Feature Connector Pinout

Pin	Signal	Description	Pin	Signal	Description
1	+V5S	5V main supply (0.75 A fuse)	2	+V5A	5V standby supply (0.75 A fuse)
3	SUS_CLK	32.768 kHz +/- 100 ppm clock used by Carrier peripherals such as M.2 cards in their low power modes.	4	RAPID_SHUTDOWN	Trigger for Rapid Shutdown. Must be driven to 5V though a <=50 ohm source impedance for ≥ 20 μs. Pull-down / disable on Module if RAPID_SHUTDOWN pin is not asserted.
5	TAMPER#	Tamper or Intrusion detection line on VCC_RTC power well. Carrier hardware pulls this low on a Tamper event.	6	SUS_S4_S5#	Indicates system is in Suspend to Disk (S4) or Soft Off (S5) state. Active low output.
7	PS_ON#	Power supply on (active low).	8	CARRIER_HOT#	Input from off-Module temp sensor indicating an over-temp situation.
9	SUS_S3#	Suspend to RAM state. Active low output.	10	LID#	Module input signal, generation a LID close or open event.
11	THERMTRIP#	Active low output indicating that the CPU has entered thermal shutdown.	12	WAKE1#	General purpose wake up signal. May be used to implement wake-up on PS2 keyboard or mouse activity.
13	WD_OUT	Output indicating that a watchdog time-out event has occurred.	14	PEG_LANE_REV#	PCI Express Graphics lane reversal input strap.
15	WDTRIG#	Watchdog Trigger	16	VIN_PWR_OK#	Power OK from main power supply. A high value indicates that the power is good.
17	BATLOW#	Indicates that external battery is low.	18	SLEEP#	Sleep button. Low active signal used by the ACPI operating system to bring the system to sleep state or to wake it up again.
19	UART0_TX	COM module's serial port 0 transmit line	20	UART1_TX	COM module's serial port 1 transmit line
21	UART0_RX	COM module's serial port 0 receive line	22	UART1_RX	COM module's serial port 1 receive line
23	TEST#	Module input for vendor specific module test mode(s).	24	AC_PRESENT	Driven hard low on Carrier if system AC power is not present.
25	GND	Power ground	26	GND	Power ground

X49



Connector Type

X49: 2.54 mm, 2x13 pin female connector




4.17 GPIO Pin Header

The conga-HPC/uATX-Client provides 12 GPIO pins on header X52.

Table 61 X52 - GPIO Header Pinout

Pin	Signal	Pin	Signal
1	+V3.3 standby (0.75 A fuse)	2	+V3.3 main (0.75 A fuse)
3	GPIO_00	4	GND
5	GPIO_01	6	GND
7	GPIO_02	8	GND
9	GPIO_03	10	GND
11	GPIO_04	12	GND
13	GPIO_05	14	GND
15	GPIO_06	16	GND
17	GPIO_07	18	GND
19	GPIO_08	20	GND
21	GPIO_09	22	GND
23	GPIO_10	24	GND
25	GPIO_11	26	GND

X52



Connector Type

X52: 2.54 mm, 2x13 pin female connector



4.18 I2C0 Pin Header

The conga-HPC/uATX-Client provides I2C0 pins on header X53. I2C0 is defined to operate with 3.3 V.

Table 62 X53 - I2C0 Pin Header Pinout

Pin	Signal
1	+V3.3 standby (0.75 A fuse)
2	I2C0_DAT
3	I2C0_CLK
4	I2C0_ALERT#
5	GND



Connector Type

X53: 2.54 mm, 5-pin female connector

4.19 I2C1 Pin Header

The conga-HPC/uATX-Client provides I2C1 pins on header X54. I2C1 is defined to operate with 1.8 V.

Table 63 X54 - I2C1 Pin Header Pinout

Pin	Signal
1	+V1.8 standby (0.75 A fuse)
2	I2C1_DAT
3	I2C1_CLK
4	10 kΩ pull-up to +V1.8 standby rail
5	GND



Connector Type

X54: 2.54 mm, 5-pin female connector



4.20 SMBus Pin Header

The conga-HPC/uATX-Client provides SMBus pins on header X55.

Table 64 X55 - SMBus Header Pinout

Pin	Signal
1	+V3.3 standby (0.75 A fuse)
2	SMB_DAT
3	SMB_CLK
4	SMB_ALERT#
5	GND



Connector Type

X55: 2.54 mm, 5-pin female connector

4.21 Front Panel Pin Header

The conga-HPC/uATX-Client provides front panel pins on header X50.

Table 65 X50 - Front Panel Pin Header Pinout

Pin	Signal	Pin	Signal
1	NC	2	+V5 (330 Ω series resistor, LED-ready)
3	NC	4	GND
5	GND	6	PWRBTN#
7	RSTBTN#	8	GND
9	NC	10	No pin



Connector Type

X50: 2.54 mm, 2x5 pin female connector



4.22 I2C I/O Expander Pin Header

The conga-HPC/uATX-Client provides eight I²C pins on header X47 via an I/O expander (TI PCA9554) . The I/O expander is connected to I2C0.

Table 66 X47 - I2C Header Pinout

Pin	Signal	Pin	Signal
1	I2C_IOE_B0	2	GND
3	I2C_IOE_B1	4	GND
5	I2C_IOE_B2	6	GND
7	I2C_IOE_B3	8	GND
9	I2C_IOE_B4	10	GND
11	I2C_IOE_B5	12	GND
13	I2C_IOE_B6	14	GND
15	I2C_IOE_B7	16	GND

X47



Connector Type

X47: 2.54 mm, 2x8 pin female connector



Note

Each I2C_IOE_Bx signal has an onboard 10 k Ω pull-up resistor to the +3.3 V standby rail.




4.23 CSI Port 0

The conga-HPC/uATX-Client provides Camera Serial Interface (CSI) port 0 on connector X35.

Table 67 X35 - CSI Port 0 Pinout

Pin	Signal
1	+V3.3S (runtime voltage)
2	CSI0_I2C_DAT (3V3)
3	CSI0_I2C_CLK (3V3)
4	CSI0_MCLK (3V3)
5	CSI0_RST# (3V3)
6	CSI0_ENA (3V3)
7	GND
8	CSI0_RX3+
9	CSI0_RX3-
10	GND
11	CSI0_RX2+
12	CSI0_RX2-
13	GND
14	CSI0_CLK+
15	CSI0_CLK-
16	GND
17	CSI0_RX1+
18	CSI0_RX1-
19	GND
20	CSI0_RX0+
21	CSI0_RX0-
22	GND

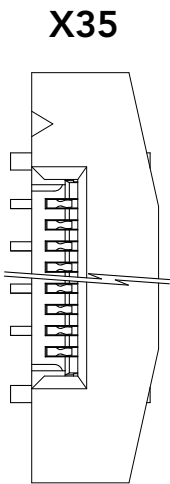

Connector Type

X35: 22-pin flexible flat cable, 0.5 mm pitch, 0.3 mm thickness (Bottom Contact); e.g., Molex Premo-Flex FFC Cable 15020 Series ([Link here](#))




4.24 CSI Port 1

The conga-HPC/uATX-Client provides Camera Serial Interface (CSI) port 1 on connector X36.

Table 68 X36 - CSI Port 1 Pinout

Pin	Signal
1	+V3.3S (runtime voltage)
2	CSI1_I2C_DAT (3V3)
3	CSI1_I2C_CLK (3V3)
4	CSI1_MCLK (3V3)
5	CSI1_RST# (3V3)
6	CSI1_ENA (3V3)
7	GND
8	CSI1_RX3+
9	CSI1_RX3-
10	GND
11	CSI1_RX2+
12	CSI1_RX2-
13	GND
14	CSI1_CLK+
15	CSI1_CLK-
16	GND
17	CSI1_RX1+
18	CSI1_RX1-
19	GND
20	CSI1_RX0+
21	CSI1_RX0-
22	GND

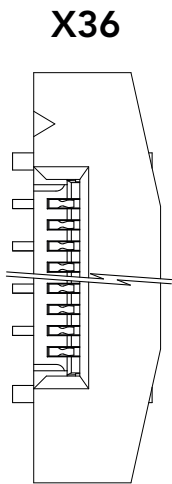

Connector Type

X36: 22-pin flexible flat cable, 0.5 mm pitch, 0.3 mm thickness (Bottom Contact); e.g., Molex Premo-Flex FFC Cable 15020 Series ([Link here](#))



5 Additional Features


5.1 Buttons

The conga-HPC/uATX-Client features power, reset, fast standby discharge, LID, and sleep buttons.

5.1.1 Power

When you press the power button SW12, it triggers the module's PWRBTN# signal. The triggered event usually initiates a transition from one power state to another (for example, from S5 to S0). However, the system's behavior depends on the ACPI settings of the Operating System.


SW12



5.1.2 Reset

When you press the reset button SW13, it triggers the module's RSTBTN# signal. The triggered event usually invokes a system warm reset. This behavior however depends on the configuration of the module.


SW13



5.1.3 Fast Standby Discharge

When you press the fast standby discharge button SW17, it quickly discharges the +5 V standby power.

SW17






5.1.4 LID

When you press the lid button SW14, it triggers the module's LID# signal. The system's behavior depends on the ACPI settings of the Operating System.


SW14



5.1.5 Sleep

When you press the sleep button SW15, it triggers the module's SLEEP# signal. The system's behavior depends on the ACPI settings of the Operating System.


SW15



5.2 Ground Test Points

The conga-HPC/uATX-Client provides 13 test points (M1-M13). These test points are connected to ground and they make it easier to connect oscilloscope probes or multimeter lines or both to ground during measurements.


M1-M13



5.3 Debug LEDs

The conga-HPC/uATX-Client provides eight LEDs (D44-D51) for post code or debug information in binary format. A list of the BIOS POST codes and associated POST test and initialization routines for congatec COM-HPC® modules is available at www.congatec.com.

D44 D45 D46 D47



D48 D49 D50 D51





6 Mechanical Drawing

