



congatec

Product Guide 2020



International partnerships



We simplify the use of embedded technology.

congatec



A story of **courage** and **passion.**

Pursuing this dream calls for a lot of courage and absolute conviction. It's a dream that inspires us, drives us anew every day.

It's a dream that requires passionate supporters to push it forward. People who help others progress and improve themselves in the process. People who inspire and are inspired.

This is the story of congatec.

The story of people who carry this spirit within them. People who put their all into developing new ideas – while remaining flexible and creative. Who respond quickly and solve problems. Who are always learning and want to explore the unknown. Who always beat a new path, whenever possible. Who stand out – when it's good to be an individual. And who do it all for the customer and their needs.



Embedded in your success.



Pure-Play

World's largest vendor focused on COMs, SBCs and customized designs only.



Roadmap

Most complete roadmap of COM products.



Solid

Stable finance. Strong growth, no debt and solid profit.



Design-In

Proven superior design-in support. Review of customers designs for compliance, thermal and mechanical design to reduce risk and shorten design cycles.



Innovative

Close partnerships to Intel, AMD and NXP. Active player in standardization committees SGET and PICMG.




Logistics

Logistics and stability of supply. Strategy for long lead time components. Flexibility through last time buy process. Proven quality for more than 13 years.



Technology Leader

congatec has been driving industry standards since 2005

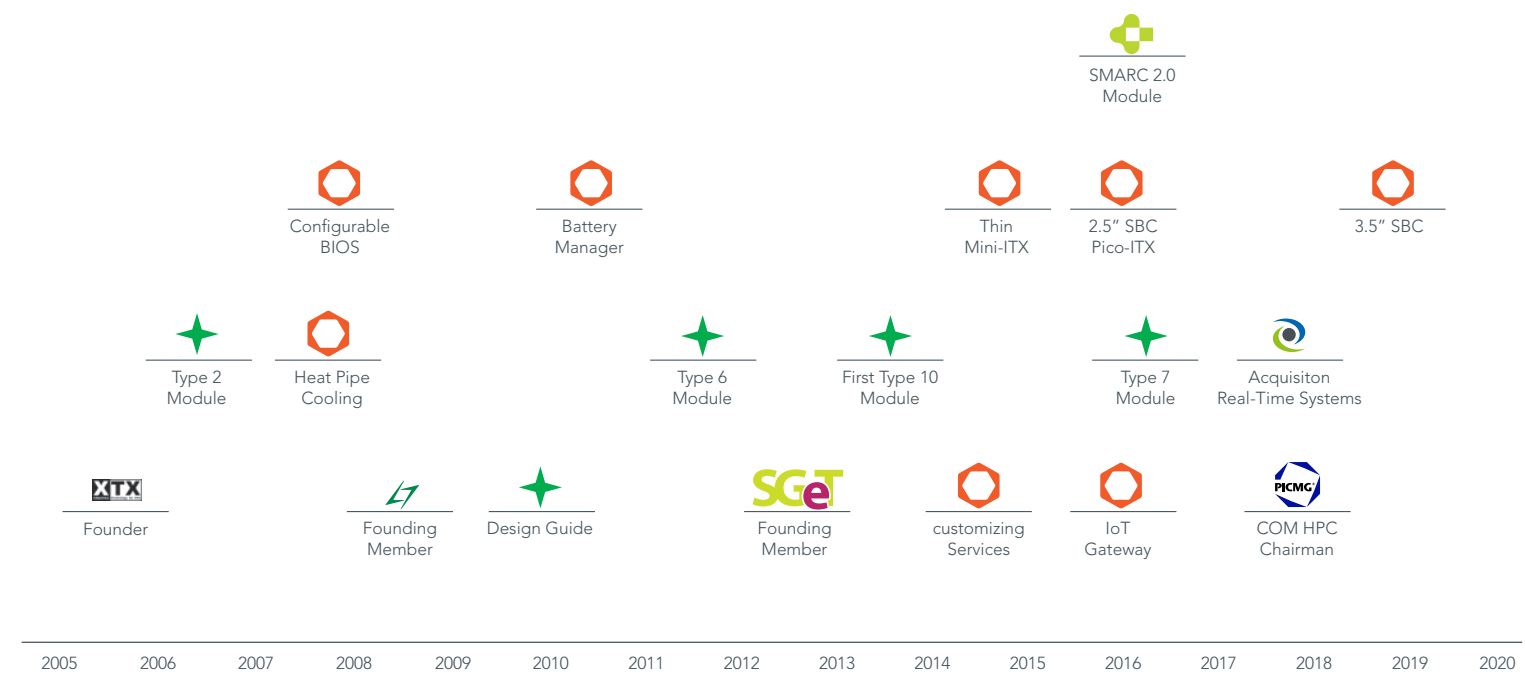

Technology Partnerships



Technology Provider
Platinum 2020



IoT Solutions Alliance

Associate member



Executive Member



Founding Member
Board Member




Specification editor Rev. 2.0, 2.1



New high performance module standard
Chairman of the PICMG workgroup



Design guide editor Rev. 1.0
Specification editor Rev. 2.0, 2.1, 3.0



Founding member
Specification & design guide editor



Key Technologies for the Industries.

Real-Time

congatec pays special attention to real-time capability during product development. The congatec BIOS/UEFI implementation is of particularly high quality, yielding significantly improved real-time results for OEM customers. By cooperating with OSADL, this real-time capability can be tested over an extremely long time.



Real-Time Hypervisor

Hypervisor support from Real-Time Systems makes the embedded computer technologies from congatec even more attractive. It allows multiple operating systems to be installed on a multicore x86 platform without impacting real-time capability. Each sub-application can be implemented with the appropriate operating system – e.g. real-time data acquisition with VxWorks, the user interface with Windows, and a firewall with Linux. Since Real-Time Systems is a wholly owned subsidiary of congatec, the distances between the two companies are very short, which gives OEMs a time advantage in support cases and promotes interdisciplinary solutions.



Security

By providing numerous BIOS/UEFI security options and Trusted Platform Module (TPM) support, congatec enables customers to implement a high level of security that is optimized for their specific solution requirements.



Real Time Hypervisor

harness the power of today's
multicore processors



Hard Real-Time Performance: Multiple Operating Systems in Perfect Harmony

Combine real-time operating systems like VxWorks®, QNX Neutrino or Real-Time Linux, with e.g. Microsoft™ Windows®
Operating systems reside simultaneously on an x86 computer while maintaining the hard real-time characteristics of an RTOS
User-definable boot sequence
Reboot any operating system anytime without disturbing the execution of other operating systems
Communication via high performance virtual TCP/IP network and flexible shared memory

Advantages

Reduced system costs and physical size
Hardware consolidation
Hard real-time performance
Maximum flexibility in system functionality
Increased reliability (MTBF) as no additional hardware is required for additional operating system
Works seamlessly with COTS and proprietary operating systems
Proven in thousands of systems worldwide


About the Hypervisor

All operating systems operate completely independent
User defined startup sequence of operating systems
Any operating system can reboot without affecting other operating systems
All operating systems safely separated and protected
Standard development tools can be used (supplied by the operating system vendors)
Standard drivers can be used - no special development required
NUMA (Non-Uniform Memory Access) fully supported
OS independent drive sharing

Real Time Hypervisor

harness the power of today's
multicore processors

The innovative Real-Time Systems Hypervisor permits multiple operating systems - both real-time (RTOS) and general purpose operating systems (GPOS) like Microsoft™ Windows® or Linux - to run concurrently on multicore x86 processors. By utilizing this powerful and cost-effective software solution, designers achieve increased flexibility in system design and remarkable enhancements to functionality and performance - at the same time reducing overall system cost.

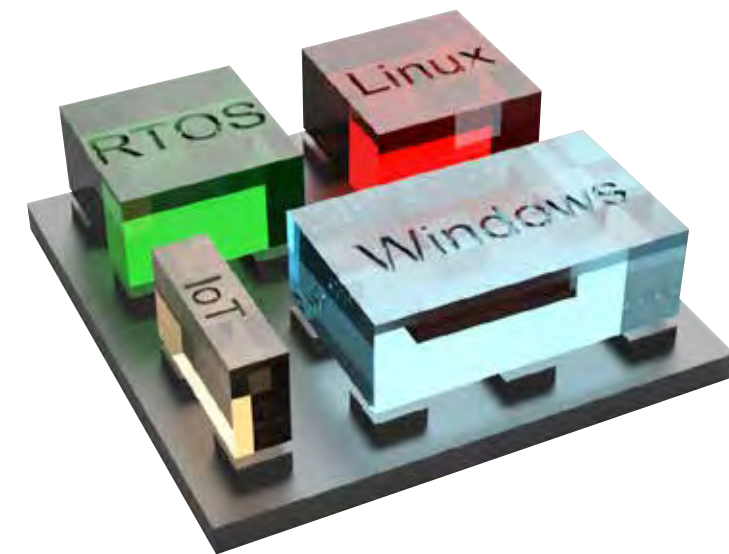

REAL-TIME
HYPERVISOR 

Single Board Computers

concept & advantages

industrial



Concept

- Ready-to-use embedded platforms -
- Reliable and rugged design -
- Based on 15+ years of embedded experience -
- Long term availability (10+ years) -
- Industrial design -

Benefits

- Extended temperature range (up to -40° ... +85°C)
- 24/7 operation
- Lowest levels of power consumption
- Rich I/O feature set
- Hard- and software customization

congatec SBCs


- The congatec Single Board Computers offer industrial reliability, embedded features and affordable pricing.
- low power embedded mobile CPUs -
 - Passive and active cooling options -
 - 24/7 operation -
 - Ceramic capacitors for extended lifetime -
 - Extended temperature options for harsh environment -
 - Long term availability 10+ years -
 - Customization of hardware and BIOS/UEFI possible -

Industrial SBCs are first choice

when desktop boards reach their limits. The use of Single Board Computers is an easy and fast way for creating industrial computing applications when there are no or just smaller special functionalities required. Customer specific functions can be added by installing cards to the provided extension sockets. Designing with SBCs is faster because there's no need to create customized carrier boards.

Computer-On-Modules

concept & advantages

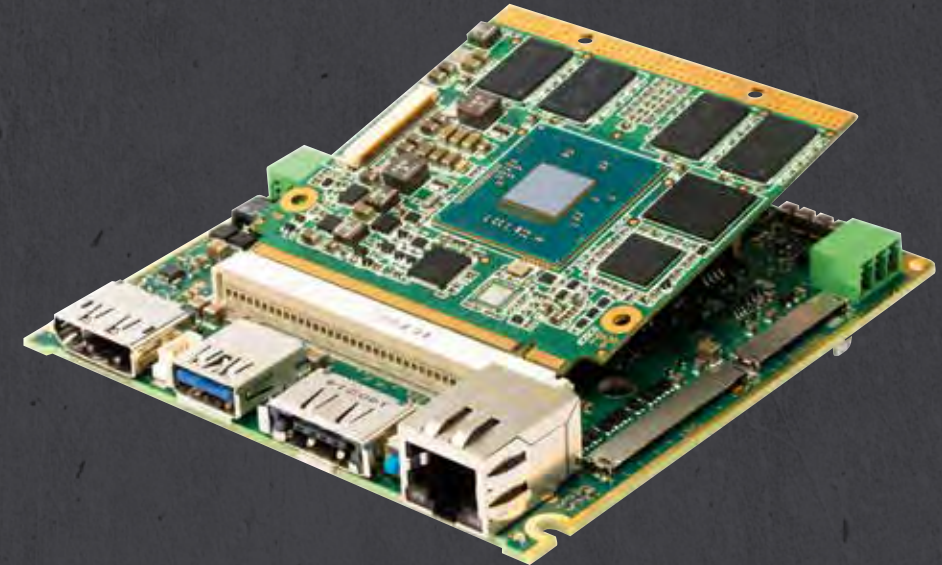

Concept

- CPU module with standard PC core functions -
- Carrier board with customer specific function&size -
- Logical alternative to a chip-down design effort -

Benefits

- Faster time to market
- Reduced development costs
- Scalable product range
- Allows customer focus on system features
- Faster reaction to market trends
- Second source philosophy
- Minimize inventory cost

Lower Costs

- COMs save money. The cost of the development and end product are dramatically reduced when compared with a full custom design. This holds true for the product's entire life-cycle. COMs provide cost advantages from the start.
- Lower engineering cost -
 - Lower product cost -
 - Lower cost of life cycle management -

Improved Flexibility

- COMs are flexible and can meet all performance requirements. The modules support a wide range of performance levels starting from NXP i.MX6 up to the Intel® Xeon® processor, as well as future architectures. The COM standards are well established and are already prepared for the future.
- Scalability -
 - Easy performance and technology upgrades -

Reduced Risk


- COMs minimize risk. Basic changes during the design phase, or in the middle of a product's life cycle, are easily managed. Simply plug in the next-generation COM module and continue. COMs allow for easy upgrades.
- Lower design risk
 - Lower transition risk

Time-To-Market Advantage

- COMs put you in a leading position. The use of customized carrier boards reduces necessary engineering effort by separating your design work from the embedded PC technology. Focus on your own core competency.
- Faster time to market
 - Faster engineering
 - Faster reaction time to market changes

COM+HPC™


Client

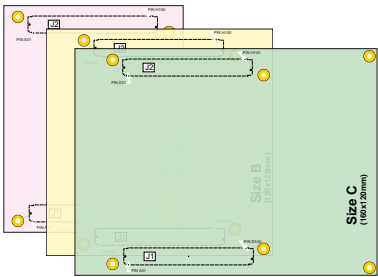

COM HPC Client

49x PCIe	
4x USB 4.0	
4x USB 2.0	
2x SATA	
12x GPIO, 2x UART	
eSPI, 2x SPI	
SMB, 2x I2C, IPMB	
2x SoundWire, I2S	
2x NBaseT (max. 10 Gb)	
3x DDI	
eDP	2x 25GBE KR
Power 8-20V DC	

Server

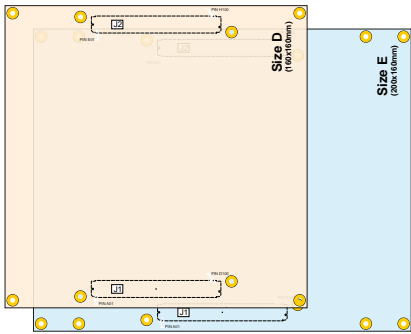

COM HPC Server

65x PCIe	
2x USB 4.0	
2x USB 3.1	
4x USB 2.0	
2x SATA	
12x GPIO	
2x UART	
eSPI, 2x SPI	
SMB, 2x I2C, IPMB	
1x NBaseT (max. 10 Gb)	
8x 25GBE KR	
Power 12V DC	

COM-HPC

COM-HPC is a new Computer-On-Module standard which is currently under development at the PICMG. Congatec is one of the founders and chairman of the technical sub-committee. The specification will be released by mid 2020.

Why a new standard?

Upcoming technologies are PCI Express Gen 4 and Gen 5, USB 4, 25Gb Ethernet and more require new concepts. Computer-On-Modules has to provide these high-speed interfaces to the carrier board. Previous standards are not prepared to support this new level of data bandwidth. The increased IO performance also requires higher compute performance and larger memory sizes - both at the cost of a higher power consumption. COM-HPC takes all these factors into account to create a new level of Server-On-Module.

Types

COM-HPC defines two different pinout types. The Server type features up to 65 PCI Express lanes and up to 8x 25Gb Ethernet but has no graphics or audio features.

The Client type supports 4 video outputs and multiple audio interfaces i.e. SoundWire and I²S. It's limited to 2x 25Gb Ethernet and 49 PCI Express lanes.

Sizes

The COM-HPC standard defines five different sizes. The small sizes A, B and C are ideal to implement the Client pinout while the larger sizes D and E will support the highest amount of memory and are ideal for Server pinout implementations.

Out of Band Management

COM-HPC will also define a comprehensive set of features to allow for an easy implementation of out-of-band management functions. This is required to create efficient edge server implementations.

Connector


Two 400-pin high-speed BGA connectors, which will be available from multiple vendors, provide the right amount of high-speed interfaces and the ability to provide up to 300 Watt of power to the module. Low cost, high performance, flexible stack height, ruggedness and a small footprint is provided by the selected connector.

Cooling

COM-HPC also defines a heatspreader to allow for easy module change between module vendors.

COM+Express®


Server Class



COM Express Type 7

Gigabit Ethernet	4x USB 3.0
LPC / eSPI	
32x PCIe	
2x SATA	4x 10GBASE-KR
4x USB 2.0	
8x GPIO / SDIO	
2x SER / CAN	
SPI & I2C	
Power	
Power	Power

Performance Class



COM Express Type 6

Gigabit Ethernet	4x USB 3.0
LPC	
8x PCIe	
HDA	PEG x16
LVDS / eDP	
ExpressCard	3x DDI
4x SATA	
8x USB 2.0	
8x GPIO / SDIO	
2x SER / CAN	
SPI & I2C	
Power	Power

Low Power Class



Type 10

Gigabit Ethernet	
LPC	
4x PCIe	
HDA	
LVDS 1x24 / eDP	
DDI	
2x SATA	
8x USB 2.0 / 2x USB 3.0	
8x GPIO / SDIO	
2x SER / CAN	
SPI & I2C	
Power	

Interfaces

COM Express defines 220/440 interconnect pins between the COM Express module and the carrier board. Older modules based on Type 2 supporting legacy interfaces like PCI are still shipping but are not recommended for new designs.

Server-on-Module

The newly introduced Type 7 pinout was generated to enable headless server class applications. It features up to four 10 Gb Ethernet ports, out-of-band management, and up to 32 PCI Express lanes.

Customization

Custom features are generated on a customized carrier board which accepts standard COM Express modules.

Size

COM Express modules are available at three different sizes. The low power Type 10 modules are implemented utilizing the Mini size while Type 6 modules utilize the Compact and Basic form factors. Type 7 modules are available in Basic size.

Thermal Design


As with Qseven and SMARC, the COM Express definition includes a heatspreader that acts as a thermal interface between the COM Express module and the system's cooling solution. All heat-generating components are thermally conducted to the heatspreader in order to avoid hot spots. The high power heatspreaders and cooling solutions utilize Congatec's patented high-efficient flat heat pipes in order to allow for maximum performance and reliability.

PCI Express

COM Express offers up to 32 PCI Express lanes. This allows the customer to enhance the performance of their embedded application. PCI Express is a low pin-count interface with maximum bandwidth per pin. PCI Express 3.0 supports up to 8 Gbit/s per lane and direction.

Video Output

Common video outputs for COM Express modules are LVDS for direct flat panel support and up to 3 DDIs (Digital Display Interfaces). Each of the DDI can be switched to TMDS (for DVI or HDMI) or DisplayPort. Type 6 modules also allow for an embedded DisplayPort. Type 7 modules are designed for headless operation.

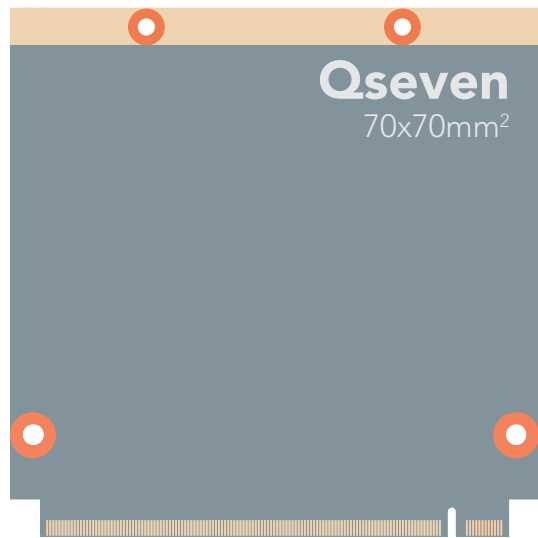

Qseven
Gigabit Ethernet
LPC
4x PCIe
HDA / I2S
LVDS 2x24 / eDP
2x MIPI CSI (Flatfoil)
DDI
2x SATA
8x USB 2.0 / 2x USB 3.0
8x GPIO / SDIO
2x SER / CAN
SPI / I2C
Power

Qseven for x86 and ARM processors

Qseven also supports ARM processors for mobile and ultra low power consumption applications. Unlike COM Express it is not limited to x86 processor technology. One carrier board can be equipped with x86 or ARM Qseven modules.

Freedom

Qseven® allows for the use of non x86 processor architectures. It also supports the low power mobile ARM processor architecture. Customers have the freedom to use all kinds of Qseven® modules without the need to change the carrier board.

Mobile Applications

Qseven® is an optimized standard targeting towards low power and mobile / ultra-mobile applications.

Low Power

Qseven® is defined for a maximum power consumption of 12 Watts. It is designed to be operated by single 5 Volt DC power and provides all additional signals for battery management. This simple power requirement allows for small mobile solutions powered by compact two cell batteries.

Connector

Qseven® does not require an expensive board-to-board connector. Instead, it utilizes a very affordable MXM2 card slot with 230 pins in a 0.5 mm configuration.

Legacy Free

Qseven is a legacy free standard focused on high speed serial interfaces such as PCI Express and Serial ATA. Qseven omits support for legacy interfaces like EIDE and PCI, in order to provide ideal support for today's, as well as future, mobile CPUs and chipsets.

Slim Design

When comparing to COM Express Basic, Compact & Mini and SMARC, Qseven enables slimmer mechanical housings.

Compact Size


The module's dimensions are a mere 70x70 mm². This means it can be easily integrated into size constricted systems.

SGeT e.V.

The Qseven Specification is hosted by the SGeT standardization group. congatec is founding member, board member and Qseven development team member of the SGeT.



SMARC 2.0
2x Gigabit Ethernet
eSPI
4x PCIe
HDA / 2x I2S
LVDS 2x24 / eDP / MIPI DSI
2x MIPI CSI
HDMI & DP++
1x SATA
6x USB 2.0 / 2x USB 3.0
12x GPIO / SDIO
4x SER / CAN
SPI / I2C
Power

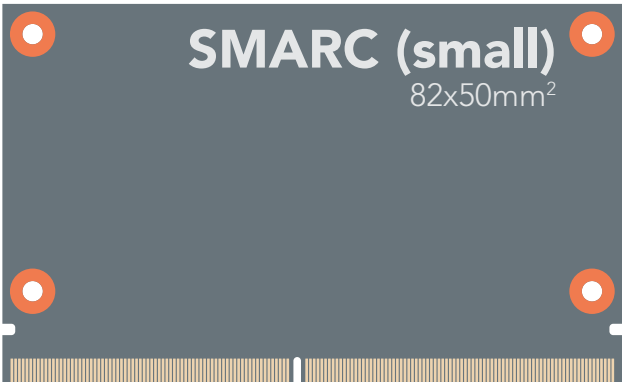

The technical highlights of SMARC 2.0

The 314 pins of the SMARC 2.0 connector, which is also used for the MXM 3.0 graphics card standard, provide space for up to four video outputs, underlining SMARC 2.0's particular suitability for multimedia applications.

Connector

SMARC 2.0 utilizes a highly reliable, high speed certified but affordable 314 pin 0.5mm MXM 3 connector.

Extensive video interface options

SMARC 2.0 offers a rich choice of internal and external video interfaces. Two dual-mode DisplayPorts (DP++) are provided for flexible external screen connections via DisplayPort, HDMI or VGA. For internal displays 2x24 Bit LVDS is implemented. Alternative use is defined to support two independent embedded DisplayPort (eDP) or MIPI Display Serial Interface (DSI)

Two Ethernet interfaces yield greater precision

SMARC 2.0 implements two Gigabit Ethernet ports, which is a particular advantage for IoT or Industry 4.0 applications. Both Ethernet ports provide SDPs (Software Defined Pins) to allow for hardware-based IEEE 1588 Precision Time Protocol (PTP)

Wireless

SMARC 2.0 provides a special area on the module that is dedicated to the placement of the miniature RF connectors to allow for wireless interfaces like WLAN and Bluetooth.

Camera interfaces

SMARC 2.0 provides all signals required to support digital cameras. For this purpose, two serial MIPI CSI (Camera Serial Interface) have been implemented.

Low Power

SMARC 2.0 is defined for low power consumption applications only. It can be operated by 3.3V or 5V DC power and provides all additional signals for battery management.

Small Size

The module's dimensions are a mere 82x50 mm². This means it can be easily integrated into size constricted systems.

congatec Design Services for customized designs

Existing know-how and infrastructure make it possible for customers to outsource custom designs to congatec. As a single supplier covering the complete range of cost-effective standard solutions to individual customized projects, congatec supports the full range of technology platforms – from x86 to ARM and from standard form factors i.e. COM Express or Pico-ITX to full customized board designs. For customized projects congatec acts as a service provider supporting the specific system designs of customers.



congatec's Customizing Services

congatec's embedded customizing support starts at the design phase and includes project management, the development of specific hardware and software, production control, system integration and global logistics, as well as the provision of technical support.

Customization

of Single Board Computers
of Computer-On-Modules

Design

of Carrier Boards
of Full Custom Hardware
of Cooling Solutions
of Mechanics

Modification

Special BIOS/UEFI/Firmware features or settings

System Integration

including Tests and Certifications

Manufacturing

Efficient High Quality Production Services



congatec as Outsourcing Partner

Overview

Mutually define system requirements
Create product concept
Provide detailed design including supply chain
Turnkey delivery for the complete product life cycle

Benefits

Leverages congatec embedded computing expertise
Improves time to market and reduces development cost
Simplifies customers supply chain
congatec manages the entire product life cycle
Intellectual property remains with the customer




congatec supports customer developments throughout the entire product life cycles. Customers benefit from congatec's rich experience as a manufacturer of high quality computer modules with synergistic effects leading to reduced development time and cost.

congatec Technical Services for customized designs



Worldwide Coverage

Engineering and support for standard and customized products in all major regions

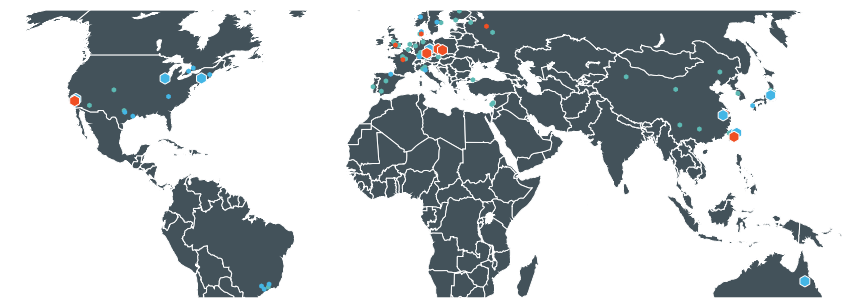

Services for the Project Definition Phase

Product Selection Support

SBC, COM or full custom design? Forward looking I/O selection, ...

Design-In Training

Engineering trainings covering all aspects fo carrier board designs



Services for the Design Phase

Design Guides

In depth best practice solutions

Reference Schematics

High level starting point for own designs

Component Selection

Support to find the right functionality, costs, availability, ...

Signal Integrity Simulation

High speed simulation allows layout adjustments before the first prototypes are produced

Schematic Review

Check the design to recognize problems at an early stage

Layout Review

Detailed check and best practice advice from our specialists

BIOS/UEFI/Firmware Customization

Implementation of customized features or settings

Bring-Up Support

congatec engineering support to bring life to the first prototypes quickly



Services for the Validation Phase

Compliance Measurements

Measurement of the signal integrity up to 36 GHz for Rx and Tx signal path

Thermal Solutions

Optimized cooling solutions featuring heat stacks, heat pipes or vapor chambers

Customized Article Handling

Handling of manufacturing and logistics requirements

Support for EMC Measurements

Engineering support to optimize the designs to EMC requirements

MTBF

Reliability calculations based on different standards i.e. Telcordia 3, SN 29500, IEC 61709, ...



Information Sources

Users Guides

Accurate and detailed product related information

Application & Tech Notes

Specific solutions described in detail i.e. benchmarks, power consumption measurements for different CPUs use cases, and details about the enhanced congatec BIOS features

Design Guides

Deep technical "how to" for carrier boards, battery managers, and more

Reference Schematics

Schematics and layout files to be used as a blueprint for your carrier board designs

congatec embedded BIOS / UEFI



congatec System Utility

Embedded computer users usually require more than the standard functionality of an office computer. congatec has taken these requirements into account when designing BIOS / UEFI functionalities. Based on our large amount of BIOS and UEFI experience, we have implemented the embedded requirements into our powerful congatec BIOS / UEFI platform.



congatec Board Controller

An onboard micro controller fully isolates most of the embedded features, such as system monitoring, multi stage watchdog or the I²C bus, from the x86 core architecture. This results in higher embedded feature performance and higher overall system reliability.



Information

Board Information

The congatec Board Controller provides a rich data set of manufacturing data and board information: serial number, article number, EAN code, manufacturing and repair date, running time meter, boot counter and more.



Setup

OEM Setup Menu Control

The feature allows customers to hide or show setup nodes and to change the descriptions at the BIOS setup screens. Full control for the setup screens is provided to the OEM.

OEM Verb Table

To initialize carrier board HDA codecs at BIOS level.

User Data Memory

congatec modules provide 32 Bytes of non-volatile storage in the EEPROM and a 64 kByte block in the BIOS flash memory. This can be used to store critical and important operating data e.g. system ID, IP address, software key, etc. User Data Memory can be read and/or write locked to prevent unauthorized manipulation or readout.

UEFI Screenshot Driver

This allows saving the current screen of the BIOS setup to a USB flash drive. The resulting .png files can be used for professional system documentation.

Post Code Redirection

The BIOS Port 80h outputs can be forwarded to the I2C bus, the SMBus or to the module UART. This allows for better in-system debugging

OEM BIOS Code

Allows customers to a “do it yourself” integration of their own legacy code into the BIOS BOOT flow. The congatec embedded BIOS calls OEM code at designated schedules. Possible options are before/after OpROM scan, before setup and before boot. This can be used to initialize custom carrier board hardware, to add PCI/PCIe OpROMs and boot loaders, to provide Windows SLP string and SLIC tables for OEM activation, to create own HDA codec verb tables or for other OEM customizations.


OEM BIOS Default Settings

The congatec embedded BIOS allows users to create custom OEM default settings. These settings can be stored as defaults in the flash memory.

BIOS Setup Data Backup

The BIOS configuration settings are held in flash memory to allow battery-less applications.

Multi Stage Watchdog Timer

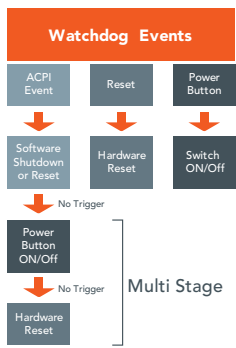

Interfaces



Fast Mode I²C Bus

The I²C Bus is a simple serial bus interface often used for sensors, converters or data storage in embedded applications. All congatec modules offer a 400 kHz multi-master I²C hardware host controller implementation..

Further congatec BIOS/BC Features

Type based boot device selection, legacy USB support, USB MSD service boot and generic LPC decoding are also supported. Further features include AT mode shutdown configuration (halt, restart), LID & Sleep support and P-State reduction. Some platforms also allow to drive any IRQ over SERIRQ at the GPIO interface.



Monitoring

Multi Stage Watchdog Timer

All congatec modules are equipped with a multi stage watchdog timer supporting different events such as ACPI event, NMI, hardware reset or power button. It can either assert a single event and/or any combination of these events.

Post Watchdog Timer

This feature allows the monitoring of the BIOS POST process. Starts at system power-up and triggers a hardware reset if adjustable timeout (256 ms to 4.5 h) is exceeded before the operating system is started.



Display

Auto-detection

Automatic detection and configuration of an attached flat panel is provided via EPL. EPL is an open standard for easy and direct control of all digital flat panel displays with maximum interchangeability

Customizable Boot Screen

Dark boot, a customized splash screen or a customer logo during POST are the boot screen options which can be set by the customer directly.



Security

Measured Boot with TPM2.0

Full TPM chip support is provided by the BIOS to support features like Bitlocker and Measured Boot.

BIOS write and update protection

Both of these functions are available once the BIOS Password has been set in the BIOS Setup. When enabled, the BIOS cannot be updated or modified, BIOS write and update protection can be temporarily disabled with the congatec System Utility (CGUTIL) (requires BIOS Password). The congatec BIOS password is SHA256 encrypted.



OS Support

32/64 Bit Uniform OS API

The congatec embedded BIOS Features are accessible through the uniform APIs EAPI (a PICMG® definition) and the congatec proprietary CGOS API interface.

OEM SMBIOS/DMI Data

Allows customers to update several SMBIOS strings. This allows for DMI table content control by the OEM customer directly. No 3rd party tools are required.

Optimized Power Management

ACPI Power Management and System Configuration are supported by the congatec BIOS / UEFI according to the ACPI specification.

OEM UEFI DXE Driver / Bootloader

This feature allows customers to integrate their own UEFI DXE driver and bootloaders. The built-in CGOS DXE driver allows for CGOS support (for example to use the I2C bus or initialize the watchdog) in these OEM DXE drivers.

Power Loss and Power-up Control

This feature controls the operation mode after AC power loss and normal power on. Turn on, remain off and last state modes are possible. This feature does not require an installed CMOS battery.

ACPI Battery Management

The congatec ACPI BIOS and Board Controller are designed to support a CMB (Control Method Battery) sub-system. It's possible to implement customized battery solutions by following the congatec CMB design guide. The solution also supports the commonly used Smart Battery Chargers and solutions with only a battery implemented.

Hardware Health Monitoring

The congatec BIOS and board controller have routines implemented to monitor critical components implemented. This allows for extensive fan control and standard temperature sensors for CPU, module and voltage monitoring. The flexible sensor/actuator assignment allows for easy customization.

LVDS Backlight Control

The backlight intensity can be set in BIOS setup or modified during run time by using the CGOS API and ACPI methods from the operating systems. External DACs and potentiometers are supported. Connections are supported utilizing the I2C or PWM signals.

OEM EDID for LVDS Panel

Allows creation of customized EDID data for any LVDS flat panel and add it to the list of predefined types.

Secure Boot with OEM Platform Key

UEFI Secure Boot is about making sure only properly signed and verified images are executed. The main overall reason for UEFI Secure Boot is to prevent any unauthorized software from being loaded in the pre-boot space. The congatec embedded BIOS allows to integrate OEM Platform Keys establishing a trust relationship between the platform owner and the platform firmware.

Optimizations for Real Time Operation

The congatec BIOS includes features to optimize the module behavior for best real time operation. CPU and GPU clocks can be fixed and turbo modes / SpeedStep / C-states can be disabled. Further options include PCIe/DMI ASPM disable, Passive cooling disable and support for exclusive IRQ.

Board Support Packages

congatec offers advanced BSPs, which include both the latest tested drivers from silicon vendors and the congatec specific drivers for accessing all of our additional embedded BIOS and module features.

congatec System Utility

All embedded BIOS features are accessible through the use of a congatec utility. This includes all manufacturing and statistical information; e.g. serial number, running hours, boot counter etc. BIOS default settings, bootlogo and flat panel configurations can easily be programmed using this flexible and powerful tool.

Server-On-Modules

embedded high
performance computing



The power saving Intel® Xeon processors and the brand new EPYC 3000 series from AMD allow for scalable server performance on COM Express modules. The type 7 pinout enables further server class features i.e. 10 Gigabit Ethernet and extra PCI Express lanes.



conga-B7AC



conga-B7XD



conga-B7E3

Formfactor	COM Express Basic 95 x 125 mm², Type 7		
	Intel® Atom™ Processor C3000 Family ("Deverton")	Intel® Xeon® Processor D-1500 Family ("Broadwell DE")	AMD EPYC™ Embedded 3000 Series
CPU	Operating temperature commercial: 0 .. +60°C		
	Atom C3958 16x2.0 GHz Cache 16MB 31W Atom C3858 12x2.0 GHz Cache 12MB 25W Atom C3758 8x2.2 GHz Cache 16MB 25W Atom C3558 4x2.2 GHz Cache 8MB 16W Atom C3538 4x2.1 GHz Cache 8MB 15W Atom C3308 2x1.6 GHz Cache 4MB 9.5W	Xeon D-1577 16x1.3/2.1 GHz Cache 24MB 45W Xeon D-1567 12x2.1/2.7 GHz Cache 18MB 65W Xeon D-1548 8x2.0/2.6 GHz Cache 12MB 45W Xeon D-1527 4x2.2/2.7 GHz Cache 6MB 35W Pentium D-1509 2x1.5/2.7 GHz Cache 3MB 19W Pentium D-1508 2x2.2/2.6 GHz Cache 3MB 25W	EPYC3451 16x2.1/3.0 GHz Cache 32MB 100W EPYC3351 12x1.9/3.0 GHz Cache 32 MB 80W EPYC3251 8x2.5/3.1 GHz Cache 16MB 55W EPYC3201 8x1.5/3.1 GHz Cache 16MB 30W EPYC3151 4x2.7/2.9 GHz Cache 16MB 45W EPYC3101 4x1.2/2.9 GHz Cache 8MB 35W
	Operating temperature industrial: -40 .. +85°C		
	Atom C3808 12x2.0 GHz Cache 12MB 25W Atom C3708 8x1.7 GHz Cache 16MB 17W Atom C3508 4x1.6 GHz Cache 8MB 11.5W	Xeon D1559 12x1.5/2.1 GHz Cache 18MB 45W Xeon D1539 8x1.6/2.2 GHz Cache 12MB 35W Xeon D1529 4x1.3 GHz Cache 6MB 20W Pentium D1519 4x1.5/2.1 GHz Cache 6MB 25W	EPYC 3255 8x2.5/3.1 GHz Cache 32MB 55W
DRAM	3 SO-DIMM sockets for DDR4 memory modules up to 96 GByte 2133 MT/s ECC or non-ECC	3 SO-DIMM sockets for DDR4 memory modules up to 96 GByte 2400 MT/s ECC or non-ECC	3 SO-DIMM sockets for DDR4 memory modules up to 96 GByte 2666 MT/s ECC or non-ECC
Chipset	Integrated in SoC		
Ethernet	4x 10GbE with KR Interface support 1x GbE Intel I210 Ethernet Controller	2x 10GBaseKR 1x GbE Intel I210 Ethernet Controller	4x 10GBaseKR 1x GbE Intel I210 Ethernet Controller
Serial ATA	2x	2x	2x
PCI Express Gen 3.0 2.0	12x 8x	24x 8x	up to 32x Gen 3.0, depending on CPU version
USB 3.1 3.0 2.0	- 2x 4x	- 4x 4x	4x - 4x
Other	LPC, SPI, I²C, 2xUART, SMBus, NC-SI		
Mass Storage	eMMC 5.0 onboard flash up to 128 GByte (optional)		Up to 1 TByte onboard NVMe storage
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control		
Embedded BIOS Feature	AMI-Aptio UEFI BIOS, congatec Embedded BIOS		
Security	"Trusted Platform Module" (TPM 2.0)		
	Intel® Quick Assist Technology Hardware integrated encryption engine		Secure Root of Trust, Secure Memory Encryption, Secure Encrypted Virtualization
Power Managment	ACPI 5.0 compliant, Smart Battery Management		
Operating Systems	Microsoft® Windows Server 2016 , 2012, 2012 R2, 2008 R2 SP1 Microsoft® Windows 10 Enterprise Microsoft® Windows 8.1 64b RHEL 6.6 & 7.1 SuSE 11 SP4 & 12 SP1 Fedora 22 Ubuntu 14.10 CentOS 6.6 & 7.1 FreeBSD Vmware Hyper-V Xen ESXi		Microsoft® Windows 10 Enterprise Windows Server 2016 Real-Time Hypervisor Yocto Linux (Ubuntu, Red Hat Enterprise Linux Server)
Temperature	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C Storage: -40 .. +85°C		
Humidity	Operating: 10 .. 90°C r. H. non cond Storage: 5 - 95% r.H non cond.		



Low Power Class

The low power product category features the latest high performance ARM processors from NXP, Atom processors from Intel, and G-Series APUs from AMD.

Multiple form factors i.e. Qseven, SMARC, COM Express Mini / Compact and Single Board Computer Formfactors.




conga-SMX8-Mini

conga-SMX8X

conga-QMX8X

Formfactor	SMARC 2.0, 82 x 50 mm²		Qseven Rev. 2.1, 70 x 70 mm²
CPU	NXP processor with commercial operating temperature 0°C .. +60°C		
	i.MX8 Mini Quad 4x Cortex-A53 + 1x M4F i.MX8 Mini Dual 2x Cortex-A53 + 1xM4F i.MX8 Mini Solo 1x Cortex-A53 + 1x M4F	i.MX8 QuadXPlus 4x Cortex-A35 + 1x M4F i.MX8 DualXPlus 2x Cortex-A35 + 1xM4F i.MX8 DualX 2x Cortex-A35 + 1xM4F	
	NXP processor with industrial operating temperature -40°C .. +85°C		
	i.MX8 Mini Quad 4x Cortex-A53 + 1x M4F i.MX8 Mini Dual 2x Cortex-A53 1xM4F i.MX8 Mini Solo 1x Cortex-A53 + 1x M4F	i.MX8 QuadXPlus 4x Cortex-A35 and 1x Cortex-M4F i.MX8 DualXPlus 2x Cortex-A35 and 1x Cortex-M4F i.MX8 DualX 2x Cortex-A35 and 1x Cortex-M4F	
DRAM	max. 4 GByte LPDDR4 3000 MT/s	max. 4 GByte LPDDR4 2400 MT/s	
Ethernet	1x 1 Gb	Up to 2x 1Gb with IEEE 1588	1x 1Gb
Serial ATA			
PCI Express	1x Gen 2	1x Gen 3	
USB	5x 2.0	1x 3.0 / 5x 2.0 (shared with 1x USB OTG)	
Other	SDIO I²C SPI UART GPIO M.2 1216 WiFi/BT module optional	SDIO I²C SPI ESPI 4x UART 2x FlexCAN GPIO MIPI-CSI M.2 1216 WiFi/BT module optional	SDIO 2x SPI 2x I2²C 3x UART 2x FlexCAN GPIO MIPI-CSI
Mass Storage	Onboard Solid State Drive eMMC 5.1 up to 128 Gbyte		
Sound	2x I²S	2x I²S, optional 1x Tensilica® HiFi 4 DSP	1x I²S, optional 1x Tensilica® HiFi 4 DSP
Graphics	Integrated in i.MX 8M Mini Series GC NanoUltra 3D GPU	Integrated GT7000Lite multimedia GPU VPU up to 4K h.265 dec / 1080p h.264 enc/dec) 3D Graphics with up to 4 high performance vec4 shaders and 16 execution units up to 2 independent displays OpenGL ES 3.1 Vulkan VX extensions OpenCL 1.2 EP OpenVG 1.1	
Video Interface	1x LVDS (2x 24 bit) MIPI-DSI DP	2x LVDS (1x 24 bit) optional HDM 1.3 2x MIPI-DSI DP	2x LVDS (1x 24 bit) optional HDM 1.3 2x MIPI-DSI
Boot loader	U-Boot boot loader		
Power Managment	NXP Power Managment IC (PMIC)		
Operating Systems	Linux, Yocto, Android		
Temperature Range	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C Storage: -40 .. +85°C		
Humidity	Operating: 10 .. 90 % r. H. non cond. Storage: 5 .. 95 % r. H. non cond.		



conga-SMX8

conga-QMX8

conga-QMX6

Formfactor	SMARC 2.0, 82 x 50 mm²		Qseven Rev. 2.1, 70 x 70 mm²	
CPU	NXP processor with commercial operating temperature 0°C .. +60°C			
	i.MX8 QuadMax 2x Cortex A72 + 4x A53 + 2x M4F i.MX8 QuadPlus 1x Cortex A72 + 4x A53 + 2x M4F i.MX8 DualMax 2x Cortex A72 + 2x M4F		i.MX6 Solo, 1GHz i.MX6 Dual Lite, 1GHz i.MX6 Dual , 1GHz i.MX6 Quad, 1GHz	
	NXP processor with industrial operating temperature -40°C .. +85°C			
	i.MX8 QuadMax 2x Cortex A72 + 4x A53 + 2x M4F i.MX8 QuadPlus 1x Cortex A72 + 4x A53 + 2x M4F i.MX8 DualMax 2x Cortex A72 + 2x M4F		i.MX6 Solo, 800MHz i.MX6 Dual Lite, 800MHz i.MX6 Dual , 800MHz i.MX6 Quad, 800MHz	
DRAM	max. 8 GByte LPDDR4 up to 3200 MT/s		max. 2 GByte DDR3 1066 MT/s	
Ethernet	2x 1 Gb with IEEE 1588		1x 1 Gb with IEEE 1588	
Serial ATA	1x		1x (Dual & Quad CPUs)	
PCI Express	2x Gen 3		1x Gen 2	
USB	1x 3.0 / 5x 2.0 (shared with 1x USB OTG)		5x 2.0 (shared with 1x OTG)	
Other	SDIO SPI 4x UART GPIO I²C MIPI-CSI 2x FlexCAN M.2 1216 WiFi/BT module optional		SPI UART FlexCAN I²C MIPI-CSI	
Mass Storage	Onboard Solid State Drive eMMC 5.0 up to 128 Gbyte			
Sound	1x I²S, optional 1x Tensilica® HiFi 4 DSP		I²S	
Graphics	Integrated up to Dual Core GPU GC7000XSVX Video quality with full 4K UltraHD resolution 4K video decode (h.265) HD video encode (h.264) OpenGL ES 3.1 Vulkan VX extensions OpenCL 1.2 EP		Integrated VPU GPU2D GPU3D 4 shaders dual stream decoder/encoder OpenGL OpenCL OpenVG	
Video Interface	2x LVDS (2x 24 bit) 1x MIPI-DSI DP HDMI		2x LVDS (2x 24 bit) 1x MIPI-DSI HDMI	
Boot loader	U-Boot boot loader			
Power Managment	NXP Power Managment IC (PMIC)			
Operating Systems	Linux, Yocto, Android			
Temperature Range	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C Storage: -40 .. +85°C			
Humidity	Operating: 10 .. 90 % r. H. non cond. Storage: 5 .. 95 % r. H. non cond.			



conga-PA5

conga-IA5

Formfactor	Pico-ITX, 72 x 100 mm²	Thin Mini-ITX, 170 x 170 x 20 mm³
CPU	5th Gen. Intel® Atom™ / Celeron® / Pentium® processors (“Apollo Lake”)	
	commercial operating tempeature: 0 .. +60°C	
	Intel Atom x7-E3950 4x1.6/2.0 GHz L2 cache 2MB 12W TDP Intel Atom x5-E3940 4x1.6/1.8 GHz L2 cache 2MB 9.5W TDP Intel Atom x5-E3930 2x1.3/1.8 GHz L2 cache 1MB 6.5W TDP Intel Pentium N4200 4x1.1/2.5 GHz L2 cache 2MB 6W TDP Intel Celeron N3350 2x1.1/2.4 GHz L2 cache 2MB 6W TDP	
	Intel Celeron J3455 4x 1.5/2.3 GHz L2 cache 2MB 10W TDP	
	industrial operating temperature: -40°C .. +85°C	
DRAM	max 8GByte onboard LPDDR4 2400 MT/s	
	Support for 2x SODIMM Socket, max. 8 GB dual channel up to DDR3L 1866 MT/s	
Ethernet	2x Intel® I210 (industrial) /I211 (commercial) Gigabit Ethernet Controller	
Serial ATA	1x SATA III 1x mSATA III	1x SATA III 1x SATA II
PCI Express Gen 2.0	1x miniPCIe shared with mSATA Full Size	1x PCIe x1 Slot 1x mPCIe Full/Half Size
USB 3.0 / 2.0	externally 2x, 1x USB 3.0 Type C / - internally - / 2x	externally 2x / 2x internally 1x with support for USB 3.0 OTG / 1x
Other I/O	2x RS232/RS422/RS485 1x micro SD slot Feature connector MIPI-CSI 2.0	1x RS232 1x RS232/RS422/RS485 1x micro SD slot MIPI-CSI 2.0 (opt.) 1x M.2 Type B (2242/3042)
Sound	Intel High Definition Audio	
Graphics	Intel HD Graphics 500 Series	
Video Interface	1x DisplayPort++ 1x 24-bit Dual Channel LVDS (optional eDP) 1x Backlight (power, control)	2x DisplayPort++ 1x 2-bit Dual Channel LVDS (optional eDP) 1x Backlight (power, control)
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control	
Embedded BIOS Feature	AMI Aptio® UEFI 2.x firmware OEM Logo OEM CMOS Defaults LCD Control Display Auto Detection Backlight Control Flash Update	
Security	Optional discrete “Trusted Platform Module” (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e commerce will benefit also with improved authentication, integrity and confidence levels.	
Power Management	1x internal DC-In (12V) 1x external DC-In (12V)	1x internal DC-In (12-24V) 1x external DC-In (12-24V) 1x opt. battery header for battery manager (SBM3)
Operating Systems	Microsoft® Windows 10 Microsoft® Windows 10 IoT Enterprise Linux Microsoft® Windows IoT Core Yocto	
Operating Temperature	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C	
Humidity	Operating: 10 .. 90 % r. H. non cond. Storage: 5 .. 95 % r. H. non cond.	




conga-SA5




conga-QA5

conga-MA5

conga-TCA5

Formfactor	SMARC 2.0, 82 x 50 mm²	Qseven, 70 x 70 mm²	COM Express Mini, 55 x 84 mm² Type 10 Connector Layout	COM Express Compact, 95 x 95 mm² Type 6 Connector Layout
CPU	5th Gen. Intel® Atom™ / Celeron® / Pentium® processors (“Apollo Lake”)			
	commercial versions 0 .. +60°C operating temperature			
	Intel Atom x7-E3950 4x1.6/2.0 GHz L2 cache 2MB 12W TDP Intel Atom x5-E394 4x1.6/1.8 GHz L2 cache 2MB 9.5W TDP Intel Atom x5-E3930 2x1.3/1.8 GHz L2 cache 1MB 6.5W TDP Intel Pentium N4200 4x1.1/2.5 GHz L2 cache 2MB 6W TDP Intel Celeron N3350 2x1.1/2.4 GHz L2 cache 2MB 6W TDP			Intel Pentium N4200 4x1.1/2.5 GHz L2 cache 2MB 6W TDP Intel Celeron N3350 2x1.1/2.4 GHz L2 cache 2MB 6W TDP Intel Celeron N3350 2x1.1/2.4 GHz L2 cache 1MB 6W TDP
	Intel Celeron J3455 4x1.5/2.3 GHz L2 cache 2MB 10W TDP			
	industrial operating temperature -40°C .. +85°C			
DRAM	Intel Atom x7-E3950 4x1.6/2.0 GHz L2 cache 2MB 12W TDP Intel Atom x5-E3940 4x1.6/1.8 GHz L2 cache 2MB 9.5W TDP Intel Atom x5-E3930 2x1.3/1.8 GHz L2 cache 1MB 6.5W TDP			
	max 8GByte onboard LPDDR4 2400 MT/s			
Chipset	Integrated in SoC			
Ethernet	2x Intel® I210 (industrial) /I211 (commercial) GBE SDP support for real time trigger	Intel® I210 (industrial) /I211 (commercial) GBE		
Serial ATA	1x	2x	2x	2x
PCI Express Gen 2.0	4x	3x	4x	5x
USB 3.0 / 2.0	2x 4x	1x 5x	2x 6x	4x 8x
Other I/O	SDIO, SPI, I²C, UART, 2x MIPI-CSI, WiFi/Bluetooth (optional)	SDIO, SPI, I²C, LPC, UART, MIPI-CSI		
Mass Storage	eMMC 5.0 onboard flash up to 64 Gbyte			opt. eMMC 5.0 onboard flash
Sound	Intel High Definition Audio			
Graphics	Intel HD Graphics 500 Series			
Video Interface	LVDS 2x 24 HDMI DisplayPort			LVDS 2x 24 2x DisplayPort or HDMi 1x eDP 1.3 (optional)
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control			
Embedded BIOS Feature	AMI Aptio® UEFI 2.x firmware OEM Logo OEM CMOS Defaults LCD Control Display Auto Detection Backlight Control Flash Update			
Security	Optional discrete “Trusted Platform Module” (TPM) and includes a real random number generator. Security sensitive applications such as gaming and e commerce will benefit also with improved authentication, integrity and confidence levels.			
Power Management	ACPI 5.0 compliant, Smart Battery Management			
Operating Systems	Microsoft® Windows 10 Microsoft® Windows IoT Core Microsoft® Windows IoT Enterprise Linux Yocto			
Temperature	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C Storage: -40 .. +85°C			
Humidity	Operating: 10 .. 90 % r. H. non cond. Storage: 5 .. 95 % r. H. non cond.			

<div><div></div><div></div></div>					
	conga-QA3	conga-QA3E	conga-MA3E	conga-MA3	
Formfactor	Qseven, 70 x 70 mm²	Qseven, 70 x 70 mm²	COM Express Mini, 55 x 84 mm² Type 10 Connector Layout	COM Express Mini, 55 x 84 mm² Type 10 Connector Layout	
CPU	3rd Gen. Intel® Atom™ / Celeron® processors (“Bay Trail”)				
	commercial versions 0 .. +60°C operating temperature				
	Atom E3845 4x1.91 GHz L2 cache 2MB 10W TDP				
	Atom E3815 1x1.46 GHz L2 cache 512kB 5W TDP		Atom E3826 2x1.46 GHz L2 1MB 7W TDP		
	Atom E3827 2x1.75 GHz L2 1MB 8W TDP Atom E3826 2x1.46 GHz L2 1MB 7W TDP Atom E3825 2x1.33 GHz L2 1MB 6W TDP Atom E3805 2x1.33 GHz L2 1MB 3W TDP Celeron J1900 4x2.0 GHz L2 2MB 10W TDP Celeron N2930 1.83 GHz L2 2MB 7.5W TDP Celeron N2807 1.58 GHz L2 1MB 4.5 TDP		Atom E3827 2x1.75 GHz L2 1MB 8W TDP Celeron N2930 1.83 GHz L2 2MB 7.5W TDP Celeron N2807 1.58 GHz L2 1MB 4.5 TDP		
	industrial operating temperature -40°C .. +85°C				
	Atom E3845 4x1.91 GHz L2 cache 2MB 10W TDP Atom E3827 2x1.75 GHz L2 1MB 8W TDP Atom E3825 2x1.33 GHz L2 1MB 6W TDP Atom E3815 1x1.46 GHz L2 cache 512kB 5W TDP Atom E3805 2x1.33 GHz L2 1MB 3W TDP		Atom E3845 4x1.91 GHz L2 2MB 10W TDP Atom E3827 2x1.75 GHz L2 1MB 8W TDP		
			Atom E3815 1x1.46 GHz L2 512kB 5W TDP		
	DRAM	max. 8 GByte dual channel DDR3L 1333MT/s	max. 8 GByte onboard ECC DDR3L 1333 MT/s		max. 8 GByte dual channel DDR3L 1333MT/s
	Chipset	Integrated in SoC			
Ethernet	Gigabit Ethernet Intel® I210		Intel® I218LM GbE Phy		
Serial ATA	2x	2x	2x	2x	
PCI Express Gen 2.0	3x	3x	3x	4x	
USB 3.0 / 2.0	1x 6x	1x 6x	1x 7x	1x 7x	
Other I/O	SDIO, GPIO, SPI, LPC, I²C				
Mass Storage	eMMC 5.0 onboard flash up to 64 GByte (optional)				
Sound	Intel® High Definition Audio				
Graphics	Intel® HD Graphics Gen. 7				
Video Interface	LVDS 2x 24 1x HDMI/DisplayPort		LVDS 1x 24 bit 1x DisplayPort/HDMI		
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control				
Embedded BIOS Feature	AMI Aptio® UEFI 2.x firmware OEM Logo OEM CMOS Defaults LCD Control Display Auto Detection Backlight Control Flash Update				
Security	LPC interface for TPM on Carrier Board		Optional discrete “Trusted Platform Module” (TPM)		
Power Management	ACPI 5.0 compliant, Smart Battery Management				
Operating Systems	Microsoft® Windows 10 Microsoft® Windows 10 IoT Core Microsoft® Windows 10 IoT Enterprise Microsoft® Windows 8 Microsoft® Windows Embedded Standard 8 Microsoft® Windows 7 Microsoft® Windows Embedded Compact 7 Microsoft® Windows Embedded Standard 7 Linux Yocto				
Temperature	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C Storage: -40 .. +85°C	Operating commercial: 0 .. +60°C Storage: -40 .. +85°C	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C Storage: -40 .. +85°C		
Humidity	Operating: 10 .. 90 % r. H. non cond. Storage: 5 .. 95 % r. H. non cond.				

<div><div></div><div></div></div>		
	conga-TCA3	conga-PA3
Formfactor	COM Express Compact 95 x 95 mm², Type 6	Pico-ITX, 72 x 100 mm²
CPU	3rd Gen. Intel® Atom™ / Celeron® processors (“Bay Trail”)	
	commercial versions 0 .. +60°C operating temperature	
	Atom E3845 4x1.91 GHz L2 cache 2MB 10W TDP Atom E3826 2x1.46 GHz L2 cache 1MB 7W TDP Celeron J1900 4x2.0 GHz L2 cache 2MB 10W TDP Celeron N2930 4x1.83 GHz L2 cache 2MB 7.5W TDP	Atom E3845 4x1.91 GHz L2 cache 2MB 10W TDP Atom E3826 2x1.46 GHz L2 cache 1MB 7W TDP
	Atom E3827 2x1.75 GHz L2 1MB 8W Atom E3825 2x1.33 GHz L2 1MB 6W Atom E3815 1x1.46 GHz L2 512kB 5W Celeron N2807 2x1.58 GHz L2 1MB 4.5W	
	industrial operating temperature -40°C .. +85°C	
	Atom E3845 4x1.91 GHz L2 cache 2MB 10W TDP Atom E3826 2x1.46 GHz L2 cache 1MB 7W TDP	
	Atom E3827 2x1.75 GHz L2 1MB 8W Atom E3815 1x1.46 GHz L2 512kB 5W	
	Support for 2x SODIMM Socket, max. 8GB dual channel up to DDR3L-1333	max. 4 GByte on board DDR3-1333
DRAM	Integrated in SoC	
Chipset	Integrated in SoC	
Ethernet	Gigabit Ethernet Intel® I210	1x Gbit LAN Intel i211 (i210 for industrial version)
Serial ATA	2x SATA II	1x SATA II 1x mSATA II
PCI Express Gen 2.0	5x	2x miniPCIe Half Size, one shared with mSATA
USB 3.0 / 2.0	1x 8x	2x 2x (1x Client)
Other I/O	SDIO, GPIO, SPI, LPC, I²C	1x RS-232 1x micro SD slot Feature connector
Mass Storage	eMMC 4.5 onboard flash up to 64 GByte (optional)	
Sound	Intel® High Definition Audio	Audio In/Out (not on industrial variants) SPDIF OUT (not on industrial variants)
Graphics	Intel HD Graphics Generation 8	
Video Interface	LVDS 2x 24 bit 2x DisplayPort/HDMI/DVI	1x 24-bit Dual Channel LVDS / 1x DisplayPort++
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control	
Embedded BIOS Feature	AMI Aptio® (UEFI) BIOS SM-BIOS BIOS Update Logo Boot Quiet Boot HDD Password	
Security	Optional discrete “Trusted Platform Module” (TPM)	
Power Management	ACPI 5.0 compliant, Smart Battery Management	1x internal DC-In (12V) 1x ext. DC-In (12V)
Operating Systems	Microsoft® Windows 10 Microsoft® Windows 10 IoT Core Microsoft® Windows 10 IoT Enterprise Microsoft® Windows 8 Microsoft® Windows Embedded Standard 8 Microsoft® Windows 7 Microsoft® Windows Embedded Compact 7 Microsoft® Windows Embedded Standard 7 Linux Yocto WindRiver IDP Android	
Temperature	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C Storage: -40 .. +85°C	
Humidity	Operating: 10 .. 90 % r. H. non cond. Storage: 5 .. 95 % r. H. non cond.	

Performance Class



fast and energy efficient

This performance category features multiple Generations of the Intel Core processors and the latest graphic output oriented CPUs from AMD. Multiple form factors i.e. COM Express Compact / Basic and Thin Mini-ITX and JUKE 3.5" boards are supported.



conga-TC370

conga-JC370

conga-IC370

Formfactor	COM Express Basic 95 x 95 mm², Type 6	3.5" Juke Board 146 x 102 mm²	Thin Mini-ITX 170 x 170 x 20 mm³
CPU	8th Generation Intel® Core™ Mobile Low Power U-Processors with up to 4 cores ("Whiskey Lake")		
	Intel Core i7-8665UE 4x1.7/4.40 GHz L2 cache 8MB 15W TDP 12.5W/25W cTDP Intel Core i5-8365UE 4x1.6/4.10 GHz L2 cache 6MB 15W TDP 12.5W/25W cTDP Intel Core i3-8145UE 2x 2.2/3.90 GHz L2 cache 4MB 15W TDP 12.5W/25W cTDP Intel Celeron 4305UE 2x 2.2 GHz L2 cache 2MB 15W TDP		
	DRAM		
	Dual channel DDR4 up to 2,400 MT/s 2x SO-DIMM max. 2x 32 Gbyte		
Chipset	Integrated Intel® 300 Series		
Ethernet	Intel® Gigabit Ethernet i219LM with AMT 12.0 support	Intel® Gigabit Ethernet i219LM (with AMT support) Intel® Gigabit Ethernet i225 (with opt. TSN support under Linux)	Intel® Gigabit Ethernet i219LM (with AMT support) Intel® 2.5 Gigabit Ethernet i225 (with opt. TSN support under Linux)
Serial ATA	3x	1x	2x
PCI Express Gen 3.0	8x	see expansion sockets	
USB 3.1 / 2.0	4x Gen 2 8x	3x Gen. 2 2x	2x Gen. 2 4x
Other	LPC bus (no DMA) I²C bus (fast mode, 400 kHz, multi-master) 2x UART		
Mass Storage	optional eMMC 5.1 on board mass storage		
Expansion Sockets		M.2 key M size 2280 M.2 key B size 2242/3042 with microSIM M.2 key E size 2230 miniPCIe full/half-size	PCIe x4 miniPCIe full/half-size M.2 key B size 2242/3042/2280 with microSIM slot M.2 key E size 2230 microSD card
Internal Connectors		SATA/eSATA/SATADOM + power Dual USB 2.0 Audio (HPout/MIC/LINE/DMIC) RS232/422/485 2x RS232 opt. CAN 8 GPIO Management I/O (opt. 8 GPIO) I²C/SM Bus Front panel DC-In (12-24 V) RTC battery socket Case open Fan	2x SATA/eSATA/SATADOM + power 2x USB 2.0 USB 3.1 Gen. 2 (Key-A) monitor off Audio (front panel / internal stereo/ SPDIF) 2x RS232/422/485 2x RS232 opt. 2x CAN 2x 8 GPIO opt. feature connector I²C/SM Bus Front panel Case open 2x Fan DC-In (12-24 V)
External Connectors		DP++ (or opt. HDMI) USB 3.1 Gen.2 Type C (PD/DP Alt. Mode) 2x USB 3.1 Gen.2 Type A 2x LAN RJ45 RS232/422/485	1x DC-In (12-24 V) 2x USB 3.1 Gen.2 (10 Gbs) 2x DP++ 2x LAN (1+2.5 Gbit) 2x USB 2.0 Audio (In/Out)
Sound	Intel® High Definition Audio	High Definition Audio Interface Realtek Audio Codec	
Graphics	Intel UHD 600 Series		
Video Interface	3x DP / HDMI or DP++ ports 18/24bit single/ dual channel LVDS or eDP optional VGA interface	DP++ (or opt. HDMI) USB Type C (DP Alt. Mode) LVDS 24bit Dual channel (or opt. eDP) opt. 2nd internal display Backlight (power/control)	2x DP++ LVDS 24bit Dual / . eDP opt. 2nd internal display Backlight (power/control)
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control Hardware Health Monitoring POST Code redirection		
Embedded BIOS Feature	AMI Aptio® 2.X (UEFI) BIOS SM-BIOS BIOS Update Logo Boot Quiet Boot HDD Password		
Security	Trusted Platform Module (TPM 2.0)		
Power Managment	ACPI compliant with battery support Suspend to RAM (S3) support S5 enhanced support Intel AMT 12.0 support	Power Supply 12-24V Power Management ACPI S3/S4/DeepS5 Wake on time from S5	
Operating Systems	Microsoft® Windows 10 (64bit only) Microsoft® Windows 10 IoT Enterprise (64bit only) Linux		
Temperature	Operating: 0 .. 60°C Storage: -20 .. +70°C		
Humidity	Operating: 10 .. 90°C r. H. non cond Storage: 5 - 95% r.H non cond.		



	conga-TS370		conga-TS175	conga-TC175	conga-IC175
Formfactor	COM Express Basic 95 x 125 mm², Type 6			COM Express Compact 95 x 95 mm², Type 6	Thin Mini-ITX 170 x 170 x 20 mm³
CPU	8th Gen. Intel® Core™ Xeon® processors ("Coffee Lake")		7th Gen. Intel® Core™ Celeron® processors ("Kaby Lake")		
	Core i7-9850HE 6x2.7/4.4 GHz Cache 9MB 45W TDP Core i7-9850HL 6x1.9/4.1 GHz Cache 9MB 35W TDP Core i3-9100HL 4x1.6/2.9 GHz Cache 6MB 25W TDP Xeon E-2276ME 6x2.8/4.5 GHz Cache 12MB 45W TDP Xeon E-2276ML 6x2.0/4.2 GHz Cache 12MB 35W TDP Xeon E-2254ME 4x2.6/3.8 GHz Cache 8MB 45W TDP Xeon E-2254ML 4x2.7/4.4 GHz Cache 8MB 35W TDP Core i7-8850H 6x2.6/4.3 GHz Cache 9MB 45W TDP Core i5-8400H 4x2.5/4.2 GHz Cache 8MB 45W TDP Core i3-8100H 4x3.0 GHz Cache 6MB 45W TDP Xeon E-2176M 6x2.7/4.4 GHz Cache 12MB 45W TDP Celeron G4932E 2x1.9 GHz Cache 2MB 25W TDP Celeron G4930E 2x2.4 GHz Cache 2MB 35W TDP		Xeon E3-1505MV6 4x3.0/4.0 GHz Cache 8MB 45/35W TDP Xeon E3-1505LV6 4x2.2/3.0 GHz Cache 8MB 25W TDP Core i7-7820EQ 4x3.0/3.7 GHz Cache 8MB 45/35W TDP Core i5-7440EQ 4x2.9/3.6 GHz Cache 6MB 45/35W TDP Core i5-7442EQ 4x2.1/2.9GHz Cache 6MB 25W TDP Core i3-7100E 2x2.9 GHz Cache 3MB 35W TDP Core i3-7102E 2x 2.1 GHz Cache 3MB 25W TDP	Core i7-7600U 2x2.8/3.9 GHz Cache 4MB 15W TDP 7.5W/25W cTDP Core i5-7300U 2x2.6/3.5 GHz Cache 3MB 15W TDP 7.5W/25W cTDP Core i3-7100U 2x2.4 GHz Cache 3MB 15W TDP 7.5W cTDP Celeron 3965U 2x2.2 GHz Cache 2MB 15W TDP 10W cTDP	
DRAM	max. 64 GByte DDR4 Intel Xeon with ECC optional		max. 32 GByte DDR4 Intel Xeon and Intel Core with ECC optional	Up to 32 GByte dual channel DDR4 memory	
Chipset	Mobile Intel® PCH-H QM/HM370 CM246 for Intel Xeon Processor		Mobile Intel 100 Series Chipset	Integrated PCH-LP	
Ethernet	Intel® I219LM GbE Phy.				Dual Gbit LAN 1x Intel® i219LM GbE AMT 11 supported 1x Intel i211
Serial ATA	4x		4x	3x	up to 3x
PCI Express Gen 2.0	8x PCIe Gen. 3.0, 1x 16 (PEG)			8x PCIe Gen. 3.0	PCIe x4 Slot (Gen.3) 1x Full/Half-size Mini PCIe Slot with micro SIM slot
USB 3.0 / 2.0	4x USB 3.1 Gen 2 10 GBs 8x		4x 8x	4x 8x	externally 4x 4x internally - 4x
Other I/O	SPI, LPC, SM, 2xSerial, GPIO/SDIO, I²C			MIPI-CSI (Flatfoil), SM, I²C, GPIO/SDIO, 2xSerial, LPC	RS232 internal 8 Bit GPIO internal M.2 Type B (2230/2242) Integrated Sensor Hub
Sound	Digital High Definition Audio Interface with support for multiple audio codecs				Audio In/Out 1x Internal stereo speaker 1x Digital Microphone (SPDIF) 1x Front Panel HD Audio
Graphics	Intel UHD 600 Series		Intel HD 600 Series		
Video Interface	LVDS 2x 24 bit/eDP, VGA 3x DisplayPort/HDMI/DVI			LVDS 2x 24 bit/eDP, VGA 2x DisplayPort/HDMI/DVI	2x DisplayPort++ 1x LVDS (2x24 bit) / Embedded DisplayPort 1x Backlight (power, control) 1x opt. CEC
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control				
Embedded BIOS Feature	AMI-Aptio UEFI BIOS, congatec Embedded BIOS				
Security	TPM 2.0 installed		Optional "Trusted Platform Module" (TPM)		
Power Management	ACPI 4.0 with Battery support				internal/external DC-In (12-24V) 1x opt. battery header for battery manager (SBM3)
Operating Systems	Microsoft® Windows 10 (64bit only) Microsoft® Windows 10 IoT Enterprise (64bit only) Linux				
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C				
Humidity	Operating: 10 .. 90°C r. H. non cond Storage: 5 .. 95% r.H non cond.				



	conga-TR4 (V Series)	conga-TR4 (R Series)	conga-TR3
Formfactor	COM Express® Basic, (95 x 125 mm), Type 6 Connector Layout		
CPU	AMD® Embedded V1000 Processors	AMD® Embedded V1000 Processors	AMD® Embedded RX-Series Processors
	V1807B 4x3.35/3.75 GHz Cache 2MB 11 CU 35/54W V1756B 4x3.25/3.6 GHz Cache 2MB 8 CU 35/54W V1605B 4x2.0/3.6 GHz Cache 2MB 8 CU 12W/25W V1202B 2x2.5/3.4 GHz Cache 1MB 3 CU 12W/25W V1404I 4x2.0/3.6 GHz Cache 2MB 8 CU 15W	R1606G 2x2.6/3.5 GHz Cache 1MB 3 CU 12/25W R1505G 2x2.4/3.3 GHz Cache 1MB 3 CU 12/25W	RX-421BD 4x2.1/3.4 GHz Cache 2MB 15W TDP RX-418GD 4x1.8/3.2 GHz Cache 2MB 15W TDP RX-416 GD 4x1.6/2.4 GHz Cache 2MB 15W TDP RX-216GD 2x1.6/3.0 GHz Cache 1MB 15W TDP GX-217GI 2x1.7/2.0 GHz Cache 1MB 15W TDP
DRAM	max. 32 GByte DDR4 with ECC		
Chipset	Integrated in SOC (single-chip)		
Ethernet	Intel GbE Controller i211		
Serial ATA	2x		4x
PCI EXPRESS® Gen. 3.0 / 2.0	4x 4x	3x 4x	- 3x
PEG	1x (x8)	1x (x4)	1x (x8)
USB 3.1 2.0	4x 8x	3x 8x	4x 8x
Other	I²C bus, SD, SPI, LPC Bus, SM-Bus, 2x UART		
Sound	Digital High Definition Audio Interface with support for multiple audio codecs		
Graphics	Radeon™ Vega Graphics Core (GFX9)		Integrated AMD Radeon™ 10000 Graphics
Video Interface	LVDS 2x 24 bit, 3x DisplayPort HDMI DVI	LVDS 2x 24 bit, 2x DisplayPort HDMI DVI	LVDS 2x 24 bit 2x DisplayPort DMI DVI
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup, Data Backup I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control Backlight		
Embedded BIOS Feature	AMI-AptioV® UEFI BIOS		
Security	"Trusted Platform Module" (TPM)		
Power Management	ACPI 5.0 with Battery support		
Operating Systems	Microsoft® Windows 10 10 IoT Enterprise Linux opt. Microsoft® Windows 7		Microsoft® Windows 10 Microsoft® Windows 8.1 Microsoft® Windows Embedded Standard 8 Linux
	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C (V1404I) Storage: -20 .. +80°C		Operating commercial: 0 .. +60°C Storage: -20 .. +80°C
Temperature	Operating commercial: 0 .. +60°C Operating industrial: -40 .. +85°C (V1404I) Storage: -20 .. +80°C		Operating: 0 .. +60°C Storage: -20 .. +80°C
Humidity	Operating: 10 .. 90% r. H. non cond. Storage: 5 .. 95% r. H. non cond.		



	conga-TS170		conga-TC170	conga-IC170
Formfactor	COM Express® Basic 95 x 125 mm², Type 6		COM Express® Compact 95 x 95 mm², Type 6	Thin Mini-ITX 170 x 170 x 20 mm³
CPU	6th Gen. Intel® Core™ / Celeron® processors (“Skylake”)			
	Intel® Xeon® E3-1578LV5 4x 2.0/3.4 GHz, 8MB, 45W Intel® Xeon® E3-1558LV5 4x 1.9/3.3 GHz, 8MB, 45W Intel® Xeon® E3-1515MV5 4x 2.8/3.7 GHz, 8MB, 45W Intel® Xeon® E3-1505MV5 4x 2.8/3.7 GHz, 8MB, 45W Intel® Xeon® E3-1505LV5 4x 2.0/2.8 GHz, 8MB, 25W Intel® Core™ i7-6820EQ 4x 2.8/3.5 GHz, 8MB, 45W Intel® Core™ i7-6822EQ 4x 2.0/2.8 GHz, 8MB, 25W Intel® Core™ i5-6440EQ 4x 2.7/3.7 GHz, 6MB, 45W Intel® Core™ i5-6442EQ 4x 1.9/2.7GHz, 6MB, 25W Intel® Core™ i3-6100E 2x 2.7 GHz, 3MB, 35W Intel® Core™ i3-6102E 2x 1.9 GHz, 3MB, 25W Intel® Celeron® G3900E 2x 2.40 GHz, 2MB, 35W Intel® Celeron® G3902E 2x 1.6 GHz, 2MB, 15W		Intel® Core® i7-6600U 2x 2.6 /3.4 GHz, Cache 4MB, 15W TDP Intel® Core® i5-6300U 2x 2.4/3.0 GHz, Cache 3MB, 15W TDP Intel® Core® i3-6100U 2x 2.3 GHz, Cache 3MB, 15W TDP Intel® Celeron® 3955U 2x 2.0 GHz, Cache 2MB, 15W TDP	
DRAM	max. 32 GByte DDR4 Intel® Xeon® and Intel® Core with E CC optional		Up to 32 Gbyte dual channel DDR4 memory	
Chipset	Mobile Intel 100 Series Chipset		Integrated PCH-LP	
Ethernet	Intel® I219LM GbE Phy			Dual Gbit LAN 1x Intel® i219LM GbE AMT 11 1x Intel i211
Serial ATA	4x		3x	3x
PCI Express	8x PCIe Gen. 3.0, 1x 16 (PEG)		8x PCe Gen. 3.0	PCIe x4 Slot (Gen.3) 1x Full/Half-size Mini PCIe Slot with micro SIM slot
USB	4x 3.0 8x 2.0		4x 3.0 8x 2.0	externally 4x 3.0 - internally - 4x 2.0
Other I/O	SPI, LPC, SM, 2xSerial, GPIO/SDIO, I²C		MIPI-CSI (Flatfoil), SM, I²C, GPIO/SDIO, 2xSerial, LPC	RS232 internal 8 Bit GPIO internal M.2 Type B (2230/2242) Integrated Sensor Hub
Sound	Digital High Definition Audio Interface with support for multiple audio codecs			Audio In/Out 1x Internal stereo speaker 1x Digital Microphone (SPDIF) 1x Front Panel HD Audio
Graphics	Intel® Gen9 HD Graphics			
Video Interface	LVDS 2x 24 bit/eDP, VGA 3x DisplayPort/HDMI/DVI		LVDS 2x 24 bit/eDP, VGA 2x DisplayPort/HDMI/DVI	LVDS 1x 24 bit/eDP, VGA 2x DisplayPort/HDMI/DVI
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control			
Embedded BIOS Feature	AMI-Aptio UEFI BIOS, congatec Embedded BIOS			
Security	Optional discrete “Trusted Platform Module” (TPM).			
Power Management	ACPI 4.0 with Battery support			internal/external DC-In (12-24V) 1x opt. battery header for battery manager SBM3
Operating Systems	Microsoft® Windows 10 Microsoft® Windows 10 IoT Enterprise Microsoft® Windows 8 Microsoft® Windows Embedded Standard 8 Microsoft® Windows 7 Microsoft® Windows Embedded Standard 7 Linux			
Temperature Range	Operating: 0 .. +60°C Storage: -20 .. +80°C			
Humidity	Operating: 10 .. 90°C r. H. non cond Storage: 5 .. 95% r.H non cond			




	conga-TS97		conga-TC97
Formfactor	COM Express Basic 95 x 125 mm², Type 6		COM Express Compact 95 x 95 mm², Type 6
CPU	5th Gen. Intel® Core™ / Xeon® processors (“Broadwell”)		
	Intel Core i7-5850EQ 4x2.7/3.4 GHz 47/37W TDP Intel Core i7-5700EQ 4x2.6/3.4 GHz 47/37W TDP Intel Xeon E3-1278LV4 4x2.0/3.3 GHz 47W TDP Intel Xeon i7-5850EQ 4x1.8/3.2 GHz 47W TDP		Intel Core i7-5650U 2x2.2/3.1 GHz Cache 4MB 15W TDP Intel Core i5-5350U 2x1.8/2.9 GHz Cache 3MB 15W TDP Intel Core i3-5010U 2x2.1 GHz Cache 3MB 15W TDP Intel Celeron 3765U 2x1.9 GHz Cache 2MB 15W TDP
DRAM	max. 32 GByte DDR3L 1600 MHz		
Chipset	Intel QM87 and HM86		Intel 9 Series PCH-LP
Ethernet	Intel I218-LM GbE Phy		
Serial ATA	4x		4x
PCI EXPRESS® Gen. 2.0	7x & 16 (PEG Port)		4x
USB 3.0 / 2.0	4x 8x		2x 8x
Other	LPC, I²C, 2x Serial, GPIO		LPC, I²C, GPIO
Sound	Digital High Definition Audio Interface		
Graphics	Intel HD Graphics		
Video Interface	LVDS 2x 24 bit, VGA 3x DisplayPort/HDMI/DVI		LVDS 2x 24 bit, VGA 2x DisplayPort/HDMI/DVI
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control		
Embedded BIOS Feature	AMI-Aptio UEFI BIOS, congatec Embedded BIOS		
Security	Optional discrete “Trusted Platform Module” (TPM)		
Power Management	ACPI 4.0 with Battery support		
Operating Systems	Microsoft Windows 10 Microsoft Windows 10 IoT Microsoft Windows 10 IoT Enterprise Microsoft Windows 8 Microsoft Windows Embedded Standard 8 Microsoft Windows 7 Microsoft Windows Embedded Standard 7 Linux		
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C		
Humidity	Operating: 10 .. 90°C r. H. non cond Storage: 5 - 95% r.H non cond.		

COM Cooling Solutions


Cooling solutions for COM Express

The specifications for Qseven, COM Express and SMARC include heatspreader definitions, the mechanical thermal interface. All the heat generated by power consuming components such as chipsets and processors is transferred to the system's cooling via the heatspreader. This can be achieved by either a thermal connection to the casing, a heat pipe or a heat sink.


Heatspreader




Heatpipe Heatspreader



Passive cooling solution



Active cooling solution



congatec's smart cooling pipes pave the way for unlimited performance growth for COM Express modules

High Performance Cooling

The congatec heatspreaders and cooling solutions for the high performance modules are feature heatpipes in order to boost performance and reliability. A copper block is mounted on the chip to absorb heat and to mitigate the effects of thermal peaks. Between the chip and the copper block, a phase-change material is placed to improve the heat transmission. To account for different component heights and manufacturing tolerances, the copper block is spring loaded to apply an optimized pressure to the silicon die. The copper block and the cooling fins or heat plate are connected by flexible flat heatpipes.


The heat pipe is attached directly to the cooling blocks on the chip and the heatspreader plate. As a result, more heat is transported from the processor environment to the heatspreader, hot spots are cooled more quickly and therefore the processor is optimally cooled.



High performance active cooling solution for server class COM Express Type 7 modules

Cooling solutions for Qseven and SMARC


Heatspreader outer side



Heatspreader inner side




Cooling Solution with fins




SBC Cooling Solutions

Slim cooling solutions for Thin Mini-ITX boards


Active cooler with fan for optimized air flow



Bottom view with phase change material



Passive cooler with spring loaded mounting



Bottom view with phase change material



Active cooling solution for full Thin Mini-ITX compliant solutions at max height of 20 mm. Highly reliable, servo controlled fan. Leaf springs for best thermal contact to the CPU. Installed phase change material for optimized heat transfer allows for best turbo boost performance. Solid mechanics with retention frame mounted at the rear side of the board enable high shock and vibration levels.

Passive cooling solution for full Thin Mini-ITX compliant solutions at max height of 20 mm. Installed phase change material for optimized heat transfer allows for best burst performance. Spring loaded screws for best thermal contact to the CPU. Solid mechanics with retention frame at the rear side of the board enables high shock and vibration levels. No movable parts for highest reliability.



Extreme slim Thin Mini-ITX board with installed cooling

Heat spreader and passive cooling solution for Pico-ITX boards

Heatspreader with copper block and phase change material



Flat surface for best heat transmission to a chassis



Optimized cooler on top of the heatspreader



Cooler and heatspreader installed to bottom side of a Pico-ITX



The CPU as heat generating component is placed on the bottom side of the Pico-ITX board. This allows for a heat spreader concept for conduction cooled systems. The heat spreader with its installed phase change material and copper block for heat transient buffering is preinstalled with 2 screws to the Pico-ITX board. This combination can be

mounted to a metal housing or to any other system cooling device.

Extreme slim passive cooling for conduction cooling. Installed phase change material for best heat transmission. Solid copper block to handle transient heat and allows for best burst performance. Through holes for easy mounting

Starter Kits

all tools in a box to start
your rapid development



conga-QKit

This complete kit provides the ability to start evaluating Qseven® modules immediately. Available for ARM (with conga-QMX6) and x86 (with conga-QA5).



conga-SKit

This complete kit provides the ability to start evaluating SMARC modules immediately. Available for ARM (with conga-SMX8) and x86 (with conga-SA5).



conga-MIPI/Skit-ARM

This complete kit provides the ability to connect Basler MIPI cameras to the NXP i.MX8 based SMARC 2.0 module conga-SMX8.



conga-CAM/MIPI Development Kit

This complete kit provides the ability to setup 2 MIPI cameras based on the Pico-ITX single board computer conga-PA5.

Evaluation Carrier

the base design for
your own carrier board

Evaluation Carrier Boards

congatec provides evaluation carrier boards for all supported Computer-On-Module standards. This allows for a quick start of new designs. These carrier boards route all the COM signals to standard interface connectors.

Documentation

The schematics and board data of the evaluation carrier boards are freely available and can be used as a blue print to create own customized designs.



conga-X7EVAL

Evaluation carrier board for COM Express Type 7 modules.



conga-TEVAL

Evaluation carrier board for COM Express Type 6 modules.



conga-MEVAL

Evaluation carrier board for COM Express Type 10 modules.



conga-SEVAL

Evaluation carrier board for SMARC 2.0 modules.



conga-QEVAL

Evaluation carrier board for Qseven modules.

Application Carrier Boards

the easiest way to implement Computer-On-Modules

Documentation

The schematics and board data of the Application Carrier Boards are available for customers on request and can be used as a blue print to create own customized designs.

Application Carrier Boards

come in size-optimized form factors with a special focus on the most common I/Os. These off-the-shelf Carrier Boards serve as platforms for rapid customization and for small or medium sized projects. congatec Application Carrier Boards reduce the time-to-market significantly.



conga-IT6
Carrier board in Mini-ITX size supporting all COM Express Type 6 modules.



conga-MCB/Qseven
Small size (95x140mm) carrier board to support all x86 based Qseven modules.



conga-SMC1/SMARC-x86
Carrier Board for x86 based SMARC 2.0 modules.



conga-STX7/Carrier
Evaluation mini-STX carrier board for COM Express Type 7 modules.



conga-MCB/ARM
Small size (95x140mm) carrier board to support all ARM based Qseven modules.



conga-SMC1/SMARC-ARM
Carrier Board for ARM based SMARC 2.0 modules.

Legacy Products

These products already have successors utilizing newer processor technology but are still in production to serve customers which require long time stable supply.

COM Express

conga-BAF	COM Express Basic Type 2 based on AMD Embedded G-Series processors	2022
conga-TCG	COM Express Basic Type 6 based on AMD Embedded GX-Series processors	2023
conga-MA4	COM Express Mini Type 10 based on 4 th Gen Intel® Atom™ Processors ("Braswell")	2023
conga-TCA4	COM Express Compact Type 6 based on 4 th Gen Intel® Atom™ Processors ("Braswell")	2023
conga-TS87	COM Express Basic Type 6 based on 4 th Gen. Intel Core processors ("Haswell")	2021
conga-TC87	COM Express Compact Type 6 based on 4 th Gen. Intel Core processors ("Haswell")	2021

Qseven

conga-QAF	Qseven based on AMD Embedded G-Series processors	2022
conga-QG	Qseven based on AMD Embedded GX-Series processors	2023
conga-QA4	Qseven based on 4 th Gen Intel® Atom™ Processors ("Braswell")	2023

XTX/ETX

conga-XAF	XTX based on AMD Fusion G-Series	2022
conga-EAF	ETX based on AMD Fusion G-Series	2022

© 2020 congatec AG. All rights reserved.

conga, congatec, and XTX are registered trademarks of congatec AG. Intel, Pentium, Xeon, and Atom are trademarks of Intel Corporation in the U.S. and other countries. SMARC, Qseven, and SGET are registered trademarks of SGET e.V. AMD is a trademark of Advanced Micro Devices, Inc. COM Express and COM-HPC are registered trademarks of PICMG. PCI Express is a registered trademark of the Peripheral Component Interconnect Special Interest Group (PCISIG). Winbond is a registered trademark of the Winbond Electronics corps. AMICORE8 is a registered trademark of American Megatrends inc.

Microsoft, Windows, Windows NT, Windows CE, and Windows XP® are registered trademarks of Microsoft corporation. VxWorks is a registered trademark of WindRiver. AMD and Fusion are registered trademarks of AMD. I.MX and NXP are registered trademarks of NXP, Inc. All product names and logos are property of the respective manufacturers. All data is for information purposes only. Although all the information contained within this document is carefully checked no guarantee of correctness is implied or expressed.



Headquarters

congatec AG
Auwiesenstraße 5
94469 Deggendorf
Germany
Phone +49 (991) 2700-0
info@congatec.com
www.congatec.com

Sales Offices

France
Mr. Luc Beugin

Phone: +33 6 44 32 70 88
cfr-sales@congatec.com

United Kingdom / Ireland
Mr. Jonathan Haynes

Phone: +44 7535 164 837
cuk-sales@congatec.com

Nordics & Baltics
Mr. Anders Rasmussen

Phone: +45 285 649 92
cdk-sales@congatec.com

Korea
Mr. Yoonsun Kim

+82 (10) 2715-6418
yoonsun.kim@congatec.com

Subsidiaries

congatec Asia Ltd.
2F., No.186, Sec. 3,
Chengde Rd.
10366 Taipei, Taiwan
Phone +886 (2) 2597-8577
sales-asia@congatec.com
www.congatec.tw

congatec, Inc.
6262 Ferris Square
San Diego
CA 92121 USA
Phone +1 (858) 457-2600
sales-us@congatec.com
www.congatec.us

congatec Japan K.K.
Unizo Hamamatsucho 1chome building 301,
Minato-ku Hamamatsucho 1-2-7,
105-0013 Tokyo-to, Japan
Phone +81 (3) 6435-9250
sales-jp@congatec.com
www.congatec.jp

Real-Time Systems GmbH
Gartenstrasse 33
88212 Ravensburg
Germany
Phone +49 (751) 359558-0
info@real-time-systems.com
www.real-time-systems.com

congatec Australia Pty Ltd.
Unit 2, 62 Township Drive
West Burleigh
Queensland 4219, Australia
Phone +61 (7) 5520-0841
sales-au@congatec.com
www.congatec.com

congatec China Technology Ltd.
Sunyoung Center, 901 Building B,
No. 28 Xuanhua Road, Changning District,
Shanghai 200050, China
Phone +86 (21) 6025-5862
sales-asia@congatec.com
www.congatec.cn