


COMe Eval Carrier2 T6

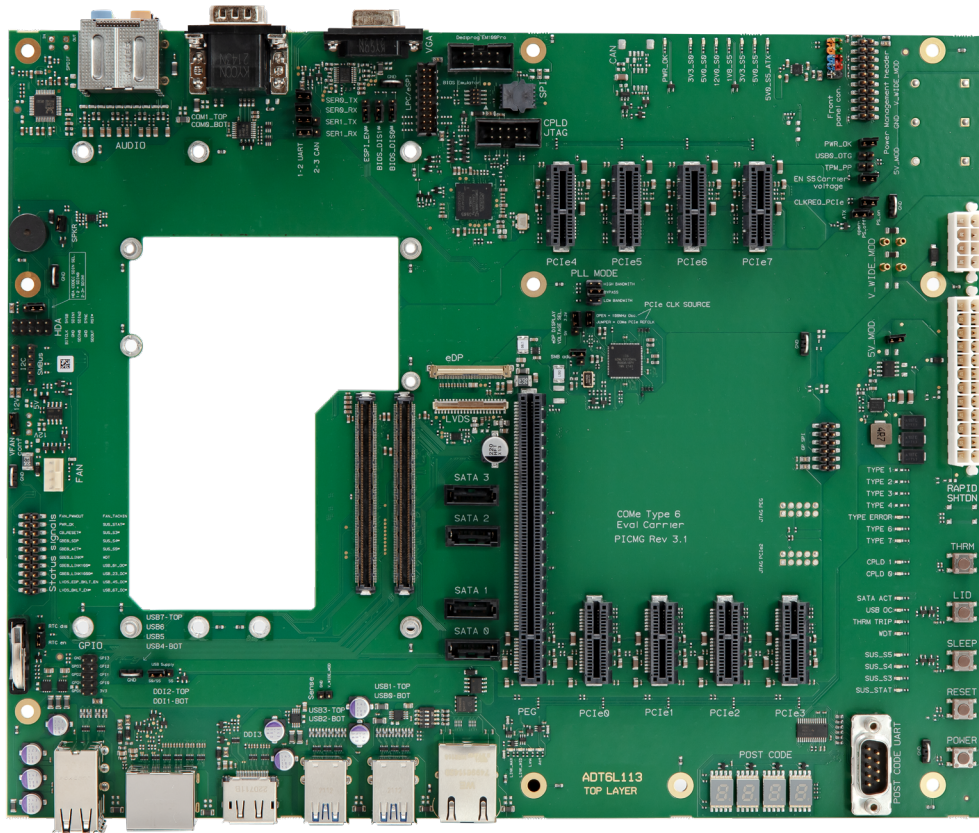

COM Express® Evaluation Carrier2 Type 6

- ▶ COM Express® Rev. 3.1 Pin-out Type 6
- ▶ GbE support
- ▶ 8x PCIe x1 + PEG x16
- ▶ 4x USB 3.1, 4x SATA, 2x RS-232, GPIO
- ▶ 3x DP, LVDS/eDP, VGA

Technical Information

FEATURES	DESCRIPTION
COMPLIANCE	COM Express® Rev. 3.1, Pin-out Type 6
DIMENSIONS	305 mm x 244 mm (ATX)
ETHERNET	1x GbE RJ45
HARD DISK	4x SATA
PCI EXPRESS®	1x PEG x16 8x PCIe x1
PANEL SIGNAL	3x DP 1x LVDS/eDP (optional) 1x VGA
USB	4x USB 3.1 (incl. USB 2.0) + 4x USB 2.0
SERIAL	2x COM ports (RX/TX only)
AUDIO	1x Audio Connector
ONBOARD HEADER	1x Feature Connector 1x LPC/eSPI 1x GPIO 1x FAN
POWER SUPPLY	ATX (24 + 8 pin Connector)

Ordering Information

ARTICLE	PART NO.	DESCRIPTION
COME EVAL CARRIER 2 T6	38116-0000-00-0	COM Express® Eval Carrier 2 Type 6
COME EVAL CARRIER 2 T6 5 MM	38116-0000-00-5	COM Express® Eval Carrier 2 Type 6 with 5 mm COMe connector

Headquarters

congatec GmbH

Auwiesenstraße 5
94469 Deggendorf, Germany
Phone: +49 (991) 2700-0

info@congatec.com
www.congatec.com

Subsidiary

JUMPtEC GmbH

Brunnwiesenstraße 16
94469 Deggendorf, Germany
Phone: + 49 991 37024-0

info@jumpotec.com

